


# Smart Bullet Network Camera

## Quick Installation Guide

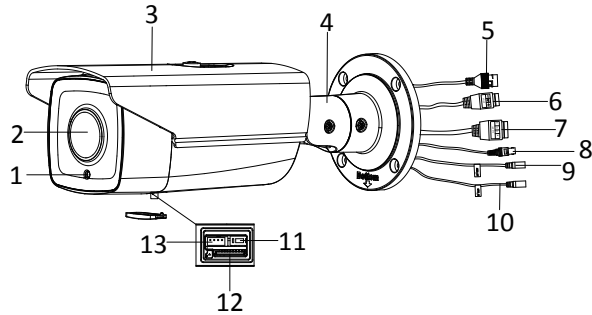


No.	Description	No.	Description
1	Photoresistor	8	Video Cable Interface
2	Lens	9	Audio Out
3	Sun Shield	10	Audio In
4	3-axis Bracket	11	Reset Button
5	Network Cable Interface	12	Micro SD Card Slot
6	Power Cable Interface	13	Serial Port
7	Alarm Cable Interface		


## Installation

### 1. Micro SD Card Installation

1.1. Loosen the two lock screws at the bottom of the bullet camera, and then remove the slot cover.

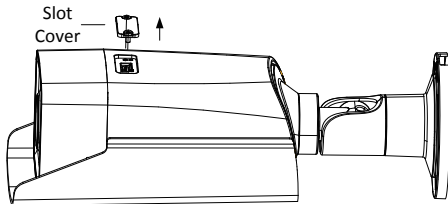

1.2. Insert the SD card into the SD card slot.

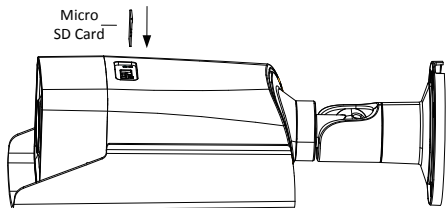

1.3. (Optional) Push the inserted micro SD card inside to remove the micro SD card.


1.4. Re-install the card cover and fasten the two screws to complete the installation

### 2. Ceiling Mounting

#### Note:


Make sure that the wall is strong enough to withstand four times the weight of the camera and the bracket

2.1. Drill the screw holes and the cable hole in the ceiling according to the supplied drill template.




2.2. Fix the camera to the wall with the supplied screws.

Please insert the expansion screws first if the camera is mounted to the cement ceiling. And you can use the self-tapping screws directly if camera is mounted to the wooden ceiling

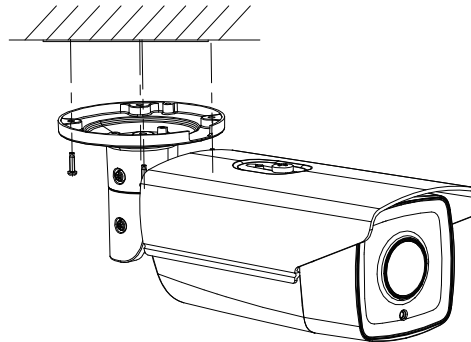

2.3. Adjust the surveillance angle.


- 1). Loosen No.1 lock screw to adjust the tilt angle [0°~100°].
- 2). Loosen No.2 lock screw to adjust the pan angle [0°~360°].
- 3). Loosen No.3 lock screw to rotate the camera [0°~360°].
- 4). Tighten the lock screws.

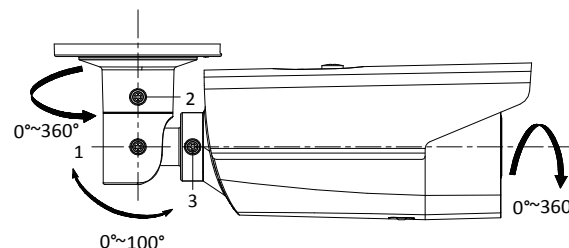

### 3. Wall Mounting with a Junction Box

#### Steps:


- 3.1. Drill the screw hole and cable hole according to the supplied drill template.
- 3.2. Align the screw holes of the junction box to the drill template, and fix the junction box to the wall with screws.
- 3.3. Route the cables.
- 3.4. Fix the camera to the junction box with screws.
- 3.5. Adjust the surveillance angle according to step 3 in Chapter 2.

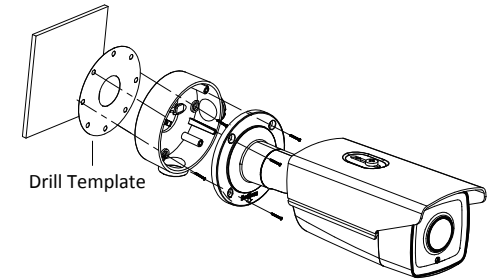

### 4. Wall Mounting with a Junction Box

#### Steps:

- 4.1. Install the adapter plate to the gang box.
- 4.2. Route the cables.
- 4.3. Fix the camera to the adapter plate with screws.
- 4.4. Adjust the surveillance angle according to step 3 in Chapter 2.

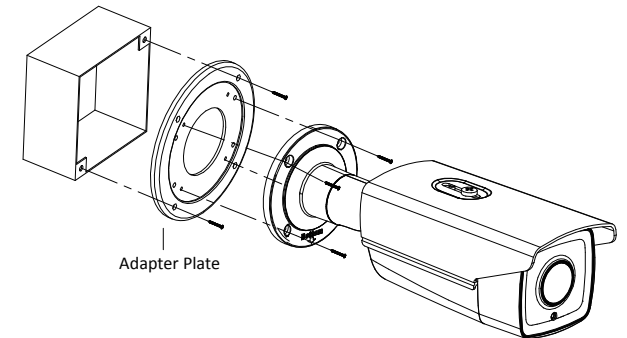

Press RESET about 10 s when the camera is powering on or rebooting to restore the default settings, including the user name, password, IP address, and port No., etc.

For the position of the reset button, refer to the figure in the installation page.