



Turret Type III Network Camera

Quick Installation Guide

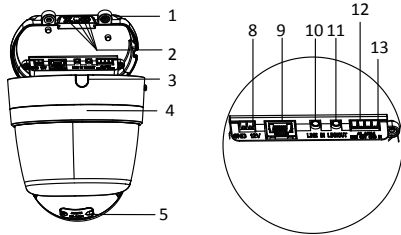


No.	Description	No.	Description
1	Bottom Cover	8	Power Interface
2	Sealing Plug	9	RJ 45 Network Interface
3	Side Outlet Cover	10	Audio Input Interface
4	Decoration Ring	11	Audio Output Interface
5	Cover	12	Alarm Output Interface
6	Reset Button	13	Alarm Input Interface
7	Memory Card Slot		


Installation Steps:

1. Memory Card Installation

- 1) Rotate to remove the decoration ring.
- 2) Loosen the adjusting screw.
- 3) Rotate the camera to the position as shown in the figure.

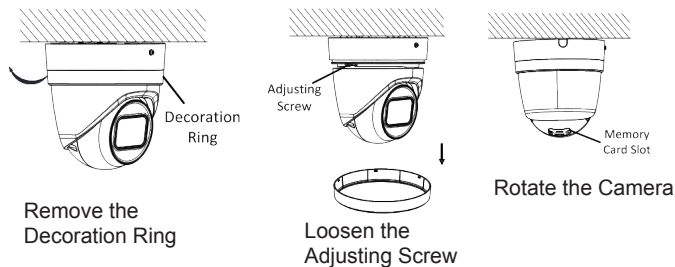


- 4) Loosen the screws to remove the cover of the memory card slot.
- 5) Insert the memory card into the slot.




- 6) Replace the slot cover with the screws.

2. Ceiling Mounting


- 1) For the cement ceiling, drill screw holes according to the hole 1 on the supplied adapter using a drill ($\Phi 5.5$ mm).




- 2) Secure the adapter to the ceiling with the supplied screws (PA4X25).



- 3) Hook the camera to the adapter with the safety rope. And loosen the screws and rotate to open the bottom cover.




- 4) Take out the sealing plugs on the bottom cover and route the cables.

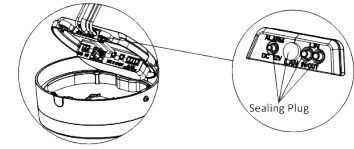

Note:


When routing the cables, take out the sealing plug of the corresponding interface as required. Otherwise, keep the sealing plug intact.

- 5) Replace the bottom cover to the camera with screws. And rotate clockwise to secure the camera to the adapter with the screw.

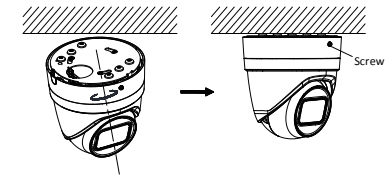

- 6) Adjust the view angle.

- a. Rotate to remove the decoration ring and loosen the adjusting screw.
- b. Adjust the camera to the desired surveillance angle.

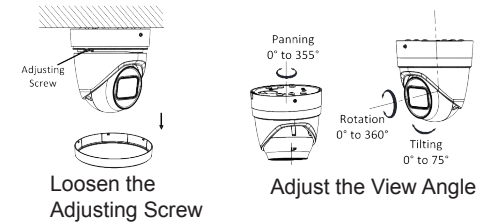

- c. Tighten the adjusting screw and replace the decoration ring.

- 7) Adjust zoom and focus.

The camera is equipped with a motorized vari-focal lens. You can adjust the zoom and focus level on PTZ control panel by visiting the camera via web browser or client software.



For detailed instructions of further configuration, please refer to the user manual of network camera.