

24-Ports 100Mbps Unmanaged PoE Switch POE-SW2402




Key Features:

- IEEE 802.3at and IEEE 802.3af PoE compliant
- Provides up to 30 watts per PoE port
- Supports PoE power up to 370W for all PoE ports
- 4 kV surge protection for PoE ports
- Plug-and-play installation
- 8.8 Gbps switching fabric
- 2.75 Mbits RAM Data Buffer
- 4K MAC address entries
- Sturdy metal enclosure
- Limited lifetime warranty

Rear Panel:

- 1. LEDs
- 2. Extend mode
- 3. PoE port
- 4. Uplink ports
- 5. SFP ports

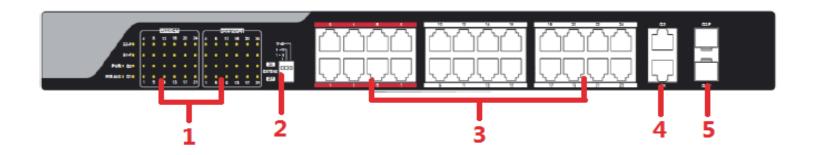











24-Ports 100Mbps Unmanaged PoE Switch POE-SW2402

Ports	
Network Ports	26
Standard	
Network Protocol	IEEE802.3,802.3u,802.3x, 802.3af, 802.3at
Performance	
Switching Capacity	8.8Gbps
Uplink Port	1000M Combo Port,2
Max. Forwarding Rate	6.55Mpps
High Priority Ports	Ports 1-8
Forwarding Mode	Store-and-forward
MAC Address Table	4k
Flow Control	IEEE802.3x full duplex
Power Over Ethernet	
PoE Port	24
PoE Standard	802.3af, 802.3at
PoE Power Budget	370W
Working Mode	Supports 8 pins powering
General	
Power supply	100-240V AC, 50/60Hz
Power Consumption	≤440W
Working temperature	32° F~104° F(0°C-40°C)
Working humidity	10 % ~ 90 %
Surge Protection	4KV
Dimensions	440 x 285 x 43 mm(17.33" ×11.22"×1.69")
Weight	≤4.29kg(9.44lb)