

LTN8932-P16N

Platinum M-Series 8K NVR

Key Features

- H.265+ / H.265 / H.264+ / H.264 video formats
- Up to 32IP camera inputs
- Up to 32 channels @ 1080p decoding capacity
- Up to 320 Mbps incoming bandwidth



Professional and Reliable

- H.265+ compression effectively reduces data storage requirement by up to 75%
- Dual-stream recording saves bandwidth
- Streams over TLS encryption technology which provides more secure stream transmission service
- Supports double verification for playback and downloading

HD Video Output

- Provides independent HDMI and VGA outputs
- HDMI video output at up to 8K resolution
- Dual 4K HDMI output resolution

Storage and Playback

- Up to four SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Supports multiple VCA (Video Content Analytics) events
- Special camera smart functions are configurable, such as VCA detections (motion, line crossing, intrusion, etc.), heat mapping, LPR, and more
- POS information overlay on live view and playback, and POS triggered recording and alarm

Network & Ethernet Access

- 16 independent PoE network interfaces
- Self-adaptive 10/100/1000 Mbps Ethernet interface
- PT Cloud & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Supports web access without plug-in


Specifications

Video and Audio	
IP Video Input	32 channels, up to 32 MP resolution
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	400 Mbps
HDMI 1 Output	8K: 7680 × 4320 / 30 Hz 4K: 3840 × 2160 / 60 Hz, 3840 × 2160 / 30 Hz 2K: 2560 × 1440, 1920 × 1080, 1600 × 1200, 1280 × 1024, 1280 × 720, 1024 × 768 / 60 Hz
HDMI 2 Output	4K: 3840 × 2160 / 60 Hz, 3840 × 2160 / 30 Hz 2K: 2560 × 1440, 1920 × 1080, 1600 × 1200, 1280 × 1024, 1280 × 720, 1024 × 768 / 60 Hz
VGA Output	1920 × 1080, 1600 × 1200, 1280 × 1024, 1280 × 720, 1024 × 768 / 60 Hz
Video Output Mode	HDMI1 / VGA simultaneous output, HDMI2 / VGA independent output
CVBS Output	1 ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1 ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1 ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	
Decoding Format	H.265+ / H.265 / H.264+ / H.264
Recording Resolution	3, 4, 5, 6, 8, 12, 24, 32 MP / 1080p / UXGA / 720p / VGA / 4CIF / D CIF / 2CIF / CIF / QCIF
Synchronous Playback	16-channel
Decoding Capability	8 ch @ 8 MP (25 fps) / 16 ch @ 4 MP (30 fps) / 32 ch @ 1080p (30 fps)
Dual-Stream Recording	Supported
Stream Type	Video, Video & Audio
Audio Compression	G.711 ulaw / G.711 alaw / G.722 / G.726 / AAC / MP2L2
Network	
Remote Connections	128
Network Protocols	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network Interface	1 x RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
PoE	
Interface	16 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Standard	IEEE 802.3 af / at
RAID	
RAID Type	N/A


Auxiliary Interface	
eSATA	1 x eSATA interface
SATA	4 x SATA interfaces
Capacity	Up to 14 TB capacity for each disk
Serial Interface	2 x RS-485 (half-duplex), 1 RS-232
Alarm In / Out	16 / 9
USB Interface	Front panel: 2 x USB 2.0; Rear panel: 1 x USB 3.0
Ctrl 12V	Controllable 12 VDC, 1 A power output for external alarm device; power will be turned on when the alarm output is triggered Note: The Ctrl 12V power is controlled by alarm output 9
12 VDC	12 VDC, 1 A power output
General	
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 15 W (without HDD and PoE off)
Operating Temperature	14° to 131° F (-10° to 55° C)
Operating Humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions (W × D × H)	17.5 × 15.7 × 3.0 in. (445 × 400 × 75 mm)
Weight (without HDD)	≤ 11 lbs (5 kg)
Certifications	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015+A1:2020, ENIEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020



Dimensions (mm)

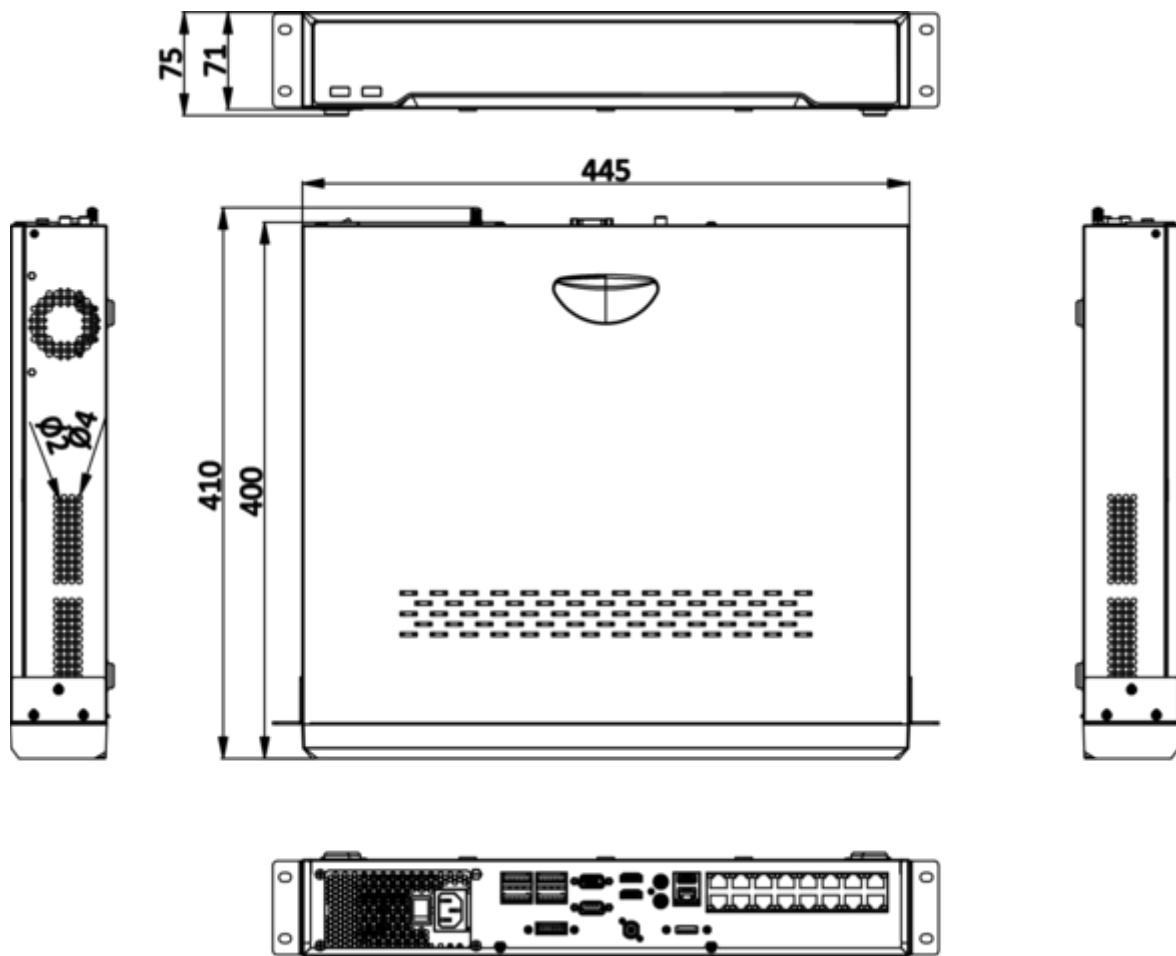

Physical Interface

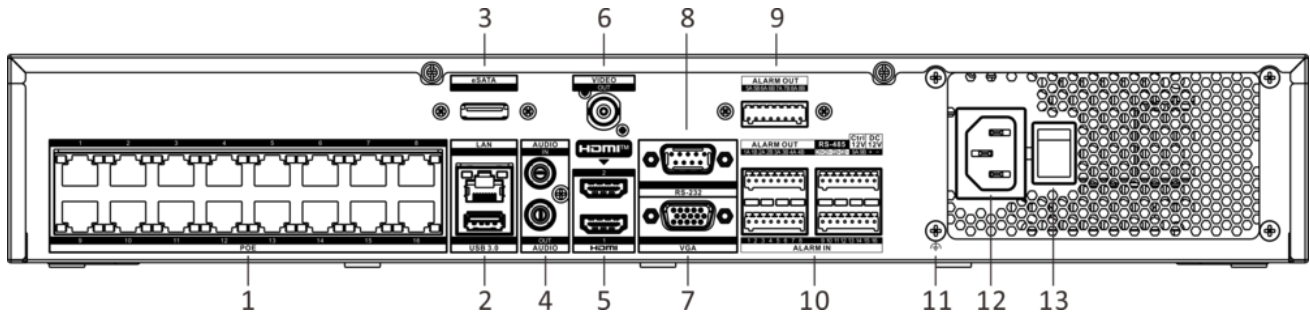

No.	Description	No.	Description
1	Network interfaces with PoE function	8	RS-232 serial interface
2	USB 3.0 interface and LAN interface	9	Alarm out
3	eSATA interface	10	Alarm in, alarm out, RS-485, Ctrl 12V and DC 12V
4	Audio in and audio out	11	GND
5	HDMI 1 and HDMI 2 interfaces	12	100 to 240 VAC power supply
6	CVBS video output	13	Power switch
7	VGA output		