

CMHT1752W-28CF Platinum 5 MP True Color 24/7 Turret Camera




- 5 MP, 2560 × 1944 resolution
- 24-hour color imaging
- 130 dB true WDR, 3D DNR
- 2.8 mm fixed focal lens
- Smart Light, up to 66 ft (20 m) white light distance
- 4-in-1 switchable video output port
- IP67
- OSD menu via UTC technology with Platinum DVR

Specifications


Camera	
Image Sensor	5 MP CMOS
Signal System	PAL / NTSC
Resolution	2560 (H) × 1944 (V)
Frame Rates	TVI: 5 MP @ 20 fps, 4 MP @ 30 fps, 4 MP @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps CVI: 4MP@30fps, 4MP@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps CVBS: PAL/NTSC
Min. illumination	0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light
Shutter Speed	PAL: 1/25 to 1/50, 000 sec. NTSC: 1/30 to 1/50, 000 sec.
Slow Shutter	Max. 16 times
Lens	2.8 mm fixed lens
Field of View	2.8 mm: Horizontal: 99.7°, vertical: 72°, diagonal: 139.8°
Lens Mount	M16
Strobe Light Alarm	Yes
Day & Night	Color
Wide Dynamic Range	≥ 130 dB
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360°
Menu	
White Light	Auto / Off
Image Mode	STD / HIGH-SAT
AGC	Yes
Day / Night Mode	Color
White Balance	Auto / Manual
Auto Exposure Mode	WDR / BLC / HLC / Global / HLS / Anti-banding
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable motion areas
Noise Reduction	3D DNR
Language	English
Function	Brightness, Sharpness, Mirror, Smart Light
Interface	
Video Output	Switchable TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C); humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 25% <i>*LTS recommends using one power adapter for each camera.</i>
Power Consumption	Max. 3.5 W
Protection Level	IP67

Materials	Main Body: Metal Enclosure: Plastic
White Light Range	Up to 66 ft (20 m)
Dimensions	Φ 4.32 × 3.37 in. (Φ 109.82 × 85.56 mm)
Weight	Approx. 0.77 lbs (350 g)


Dimensions

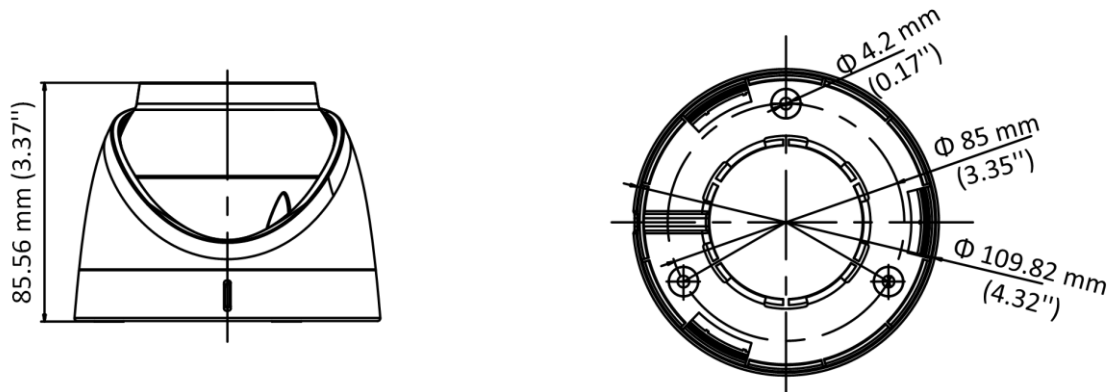


Accessories

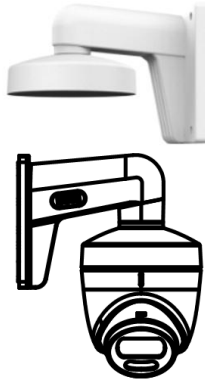

LTB342-110T
Wall Mount

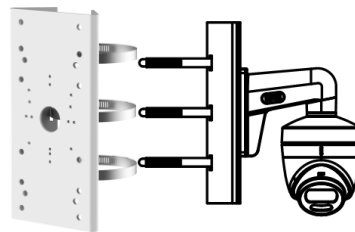

LTB378
Vertical Pole Mount

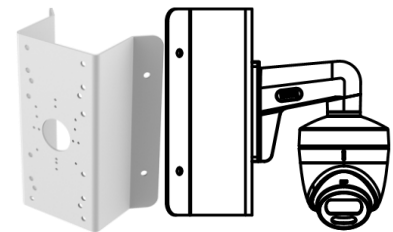

LTB379
Corner Mount