

# CMHR6422 W-CF Platinum 2 MP 24/7 Color Bullet Camera











## **Key Features**

- 2 MP high performance CMOS
- 1920 × 1080 resolution
- 24/7 color
- 3.6 mm fixed lens
- Up to 66 ft (20 m) white light distance
- 3D DNR, true WDR
- 4-in-1 switchable video output port
- IP67
- OSD menu via UTC technology with Platinum DVR















## **Specifications**

Camera	
Image Sensor	2 MP CMOS image sensor
Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p @ 25 fps NTSC: 1080p @ 30 fps
Min. illumination	Color: 0.0005 Lux @ (F1.0, AGC on), 0 Lux with white light
Shutter Time	PAL: 1/25 to 1/50, 000 sec. NTSC: 1/30 to 1/50, 000 sec.
Slow Shutter	Max. 16x
Lens	3.6 mm fixed lens
Horizontal Field of View	83.6°
Lens Mount	M16
Day & Night	Color
Synchronization	Internal synchronization
Wide Dynamic Range	120 dB
Menu	
AGC	Yes
White Balance	Auto / Manual
Backlight Compensation (BLC)	Yes
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable areas
WDR	Yes
Functions	Brightness, Sharpness, 3D DNR, Mirror, Smart light
Interface	
Video Output	1 HD analog output
Switchable Output	TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C); humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 3 W
Protection Levels	IP67
Materials	Metal
White Light	Up to 66 ft (20 m)
Communication	Up the coax, TVI output
Dimensions	$7.14 \times 2.75 \times 2.68$ in. (181.4 × 70 × 68 mm)
Weight	Approx. 0.86 lbs (390 g)













## **Dimensions**

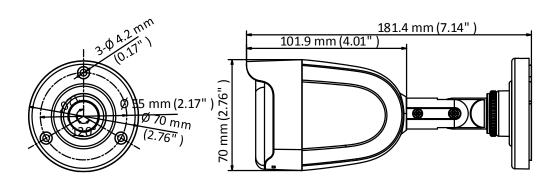



### **Accessories**

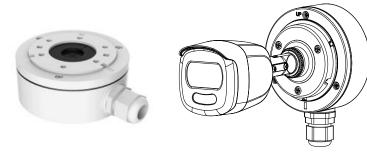

LTB345 Junction Box

© 2018 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners









