

## CMHT2122N-28F

### Platinum 2 MP Fixed Lens HD-TVI Turret Camera




- 2 MP, 1920 × 1080 resolution
- 2.8 mm fixed focal lens
- 4-in-1 video output (switchable among TVI / AHD / CVI / CVBS)
- Smart IR, up to 25 m range
- IP67

## Specifications

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL / NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	TVI: 1080p @ 30 fps, 1080p @ 25 fps CVI: 1080p @ 30 fps, 1080p @ 25 fps AHD: 1080p @ 30 fps, 1080p @ 25 fps CVBS: PAL / NTSC
Min. illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 sec. to 1/50, 000 sec. NTSC: 1/30 sec. to 1/50, 000 sec.
Lenses	2.8, 3.6, & 6 mm fixed lens
Field of View	2.8 mm: Horizontal: 101°, vertical: 60°, diagonal: 122° 3.6 mm: Horizontal: 79.6°, vertical: 43.5°, diagonal: 93.7° 6 mm: Horizontal: 51.9°, vertical: 30°, diagonal: 58.8°
Lens Mount	M12
Day & Night	ICR
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360°
Menu	
Image Mode	STD / HIGH-SAT
AGC	Yes
Day / Night Mode	Auto / Color / B & W
White Balance	Auto / Manual
AE (Auto Exposure) Mode	DWDR / BLC / HLC / Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Sharpness, Smart IR
Interface	
Video Output	Switchable among TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Power Consumption	Max. 3 W
Protection Level	IP67
Material	Metal
IR Range	Up to 25 m
Communication	HIKVISION-C
Dimensions	3.52 × 2.70 in. (89.47 × 67.6 mm)
Weight	Approx. 0.55 lbs (250 g)

## Dimensions

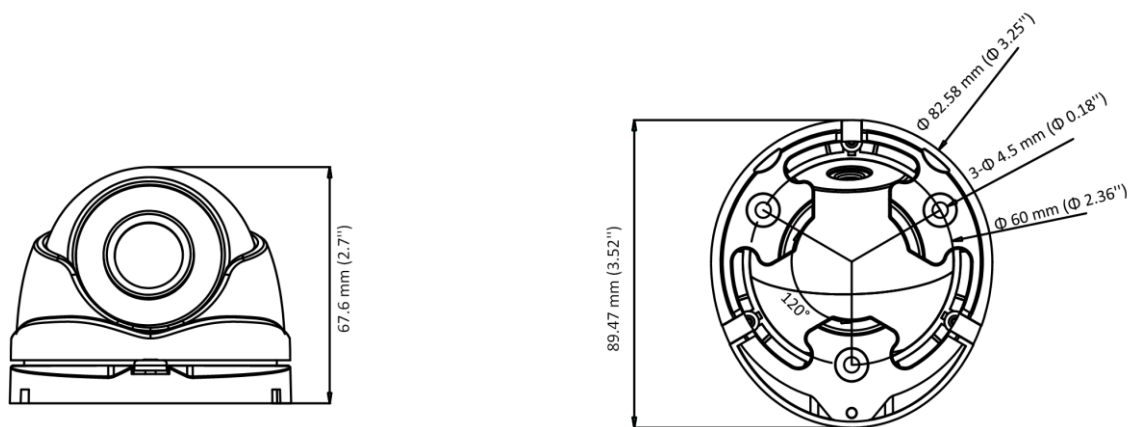

## Accessories (Optional)

LTB378 Vertical Pole Mount	LTB379 Corner Mount	LTB345 Junction box	LTB342-110T Wall mount
