


CMIP7923LPR-22

Platinum 2 MP Varifocal Bullet Network Camera

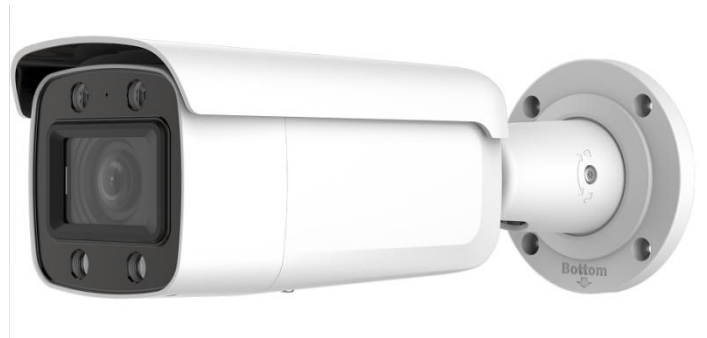

Key Features


- 1/2.8" Progressive Scan CMOS
- 1920 × 1080 @ 30 fps
- H.265, H.265+
- 120 dB WDR
- IP67, IK10
- 4 white lights for night vision
- BLC / 3D DNR / ROI / HLC
- Smart encoding: Supports low bit rate, low latency
- 4 behavior analyses and face detection

Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.005 Lux @ (F1.2, AGC on), 0 Lux with IR Color: 0.0068 Lux @ (F1.4, AGC on), 0 Lux with IR
Shutter Speed	1/3 sec. to 1/100,000 sec.
Slow Shutter	Yes
Digital Noise Reduction	3D DNR
WDR	120 dB
3-Axis Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lens	
Focal length	6 to 22 mm
Lens Type	Motorized
Aperture	F1.4
Focus	Auto
FOV	Horizontal: 105° to 35° Vertical: 56° to 20° Diagonal: 126° to 40.5°
Lens Mount	Ø14
Compression Standard	
Video Compression	Main stream: H.265 / H.264 Sub stream: H.265 / H.264 / MJPEG Third stream: H.265 / H.264
H.264 Type	Main Profile / High Profile
H.264+	Mainstream supported
H.265 Type	Main Profile
H.265+	Mainstream supported
Video Bit Rate	32 Kbps to 16 Mbps
Smart Feature-set	
Smart Event	Line crossing, intrusion, unattended baggage, object removal, face, and scene change detections
Basic Events	Motion detection, video tampering alarm, exception/anomaly (network disconnected, IP address conflict, illegal login, HDD full, HDD error)
Linkage Methods	Triggered recording: Memory card, network storage, pre- and post-recording Triggered image-capture upload: FTP, HTTP, NAS, Email Triggered notification: HTTP, ISAPI, alarm output (-S), Email
Region of Interest	Supports one fixed region for mainstream and sub-streams
Image	
Max. Resolution	1920 × 1080
Main Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720)
Sub Stream	50 Hz: 25 fps (640 × 480, 640 × 360, 320 × 240) 60 Hz: 30 fps (640 × 480, 640 × 360, 320 × 240)
Third Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720, 640 × 360, 352 × 288) 60 Hz: 30 fps (1920 × 1080, 1280 × 720, 640 × 360, 352 × 240)
Image Enhancement	BLC / 3D DNR / HLC

Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance adjustable by client software or web browser
Network	
Network Storage	Support Micro SD / SDHC / SDXC cards (128 GB), local storage and NAS (NFS, SMB / CIFS), ANR
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS
General Functions	Anti-flicker, three streams, heartbeat, mirror, privacy masks, password reset via e-mail, pixel counter, HTTP listening
API	ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS 1.2, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, TLS1.2
Simultaneous Live View	Up to 6 channels
User / Host	Up to 32 users 3 levels: Administrator, Operator and User
Compatible Web Browsers	Plug-in required live view: IE 8+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Safari 11+ Local Service: Chrome 41.0+, Firefox 30.0+
Interface	
Audio	1 input (line in), 1 output, mono sound, terminal block
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Alarm	1 input, 1 output (max. 12 VDC, 30 mA), terminal block
Video Output	1 V p-p composite output (75 Ω) (For adjustment only)
On-board storage	Built-in Micro SD / SDHC / SDXC slot, up to 128 GB
SVC	Supports H.264 and H.265 encoding
Reset Button	Yes
Audio	
Environment Noise Filtering	Yes
Audio Sampling Rate	8 / 16 / 32 / 44.1 / 48 kHz
Audio Compression	G722.1 / G.711 / G726 / MP2L2 / PCM / MP3
Audio Bit Rate	64 Kbps (G.711) / 16 Kbps (G.722.1) / 16 Kbps (G.726) / 32 - 192 Kbps (MP2L2) / 8 Kbps - 320 Kbps (MP3)
General	
Operating Conditions	-22° to 140° F (-30° to 60° C), Humidity 95% or less (non-condensing)
Web Client Languages (32)	English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil)
Power Supply	12 VDC \pm 25%, Φ 5.5 mm coaxial power; PoE (802.3 at)
Power Consumption and Current	12 VDC, 1.2 A, max. 14.5 W PoE (802.3 at, 42.5 to 57 V), 0.5 to 0.1 A, max. 16.5 W
Protection Levels	IP67, IK10
Material	Metal
Dimensions	Φ 4.1 \times 11.7 in. (Φ 105.1 \times 297.5 mm)
Weight	Camera: 2.9 lbs (1,335 g) Package: 4.4 lbs (2,004 g)

Dimensions

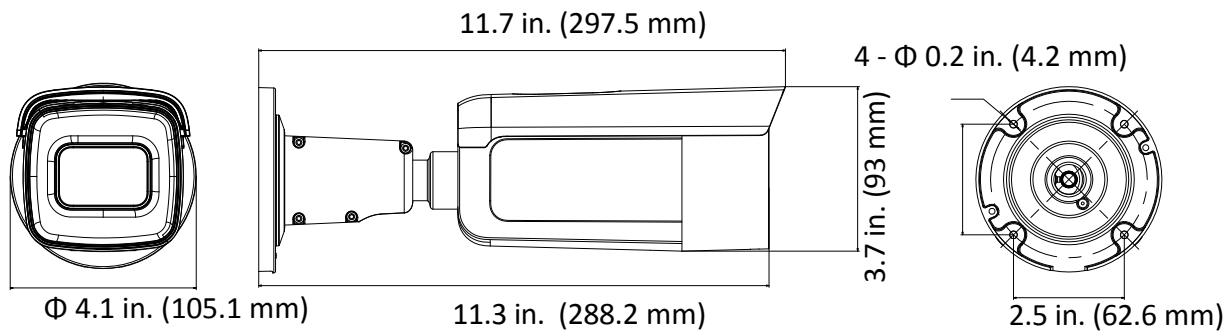

Accessories



LTB379
Corner Mount



LTB801
Junction Box