

CMHT1752N-28F / CMHT1752N-F

Platinum 5 MP Fixed Lens HD-TVI Turret Camera




- 5 MP, 2560 × 1944 resolution
- 2.8 or 3.6 mm fixed focal lens
- Smart IR, up to 131 ft (40 m) IR distance
- 4-in-1 switchable video output
- IP67 protection rating


Specifications

Camera	
Image Sensor	5 MP CMOS
Signal System	PAL / NTSC
Resolution	2560 (H) × 1944 (V)
Frame Rates	TVI: 5 MP @ 20 fps, 4 MP @ 30 fps, 4 MP @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps AHD: 5 MP @ 20 fps, 4 MP @ 30 fps, 4 MP @ 25 fps CVI: 4 MP @ 30 fps, 4 MP @ 25 fps CVBS: PAL / NTSC
Min. illumination	0.01 Lux @ (F1.2, AGC on), 0 Lux with IR
Shutter Time	PAL: 1/25 to 1/50, 000 sec. NTSC: 1/30 to 1/50, 000 sec.
Lens	2.8 mm or 3.6 mm fixed lens
Field of View	2.8 mm: Horizontal: 85°, vertical: 63°, diagonal: 110° 3.6 mm: Horizontal: 80°, vertical: 63°, diagonal: 105°
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range (WDR)	Digital WDR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360°
Menu	
Image Mode	STD / HIGH-SAT
AGC	Yes
Day / Night Mode	Auto / Color / B & W
White Balance	Auto / Manual
Auto Exposure (AE) Mode	DWDR / BLC / HLC / Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Sharpness, Mirror, Smart IR
Interface	
Video Output	Switchable TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C); humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 25%
Power Consumption	Max. 4.3 W
Protection Level	IP67
Materials	Front Cover: Plastic Main Body: Metal
IR Range	Up to 131 ft (40 m)
Communication	Up the coax, TVI output
Dimensions	Φ 109.82 × 91.03 mm (Φ 4.32 × 3.6 in.)
Weight	Approx. 0.67 lbs (303 g)



▪ Dimension

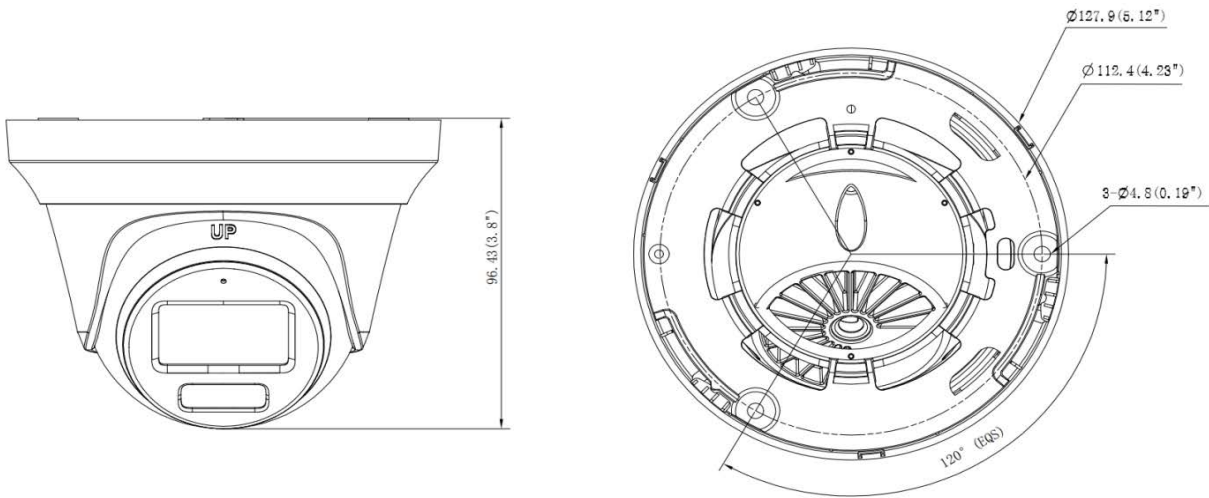

LTB342-110T
Wall Mount



LTB378
Vertical Pole Mount



LTB379
Corner Mount