

CMHD3523DWE-ZF

Platinum 2 MP Ultra -Low Light Dome Camera




Key Features

- 2 MP high performance CMOS
- Ultra-low light
- 1920 × 1080 resolution
- 2.7 to 13.5 mm varifocal lens, auto focus
- 130 dB true WDR, 3D DNR
- Smart IR, up to 197 ft (60 m) range
- 4-in-1 video output, switchable among TVI / AHD / CVI / CVBS
- IK10, IP67
- OSD Menu via UTC technology with Platinum DVR

Specifications

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL / NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p @ 25 fps NTSC: 1080p @ 30 fps
Min. Illumination	Color: 0.003 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 sec. to 1/50,000 sec. NTSC: 1/30 sec. to 1/50,000 sec.
Slow Shutter	Max. 16 times
Lens	2.7 to 13.5 mm motorized, auto focus
Horizontal Field of View	103° to 32.1°
Lens Mount	Φ 14
Day & Night	ICR
WDR (Wide Dynamic Range)	≥ 130 dB
Angle Adjustment	Pan: 0° to 355°, Tilt: 0° to 75°, Rotate: 0° to 355°
Menu	
Image Mode	STD / HIGH-SAT
AGC	Yes
Day / Night Mode	Auto / Color / B & W
White Balance	Auto / Manual
AE (Auto Exposure) Mode	WDR / BLC / HLC / Global
Privacy	4 programmable privacy masks
Motion Detections	4 programmable motion areas
NR (Noise Reduction)	3D DNR / 2D DNR
Language	English
Functions	Brightness, Sharpness, Mirror, Smart IR
Interface	
Video Output	Switchable among TVI / AHD / CVI / CVBS
General	
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity: 90% or less (non-condensing)
Power Supply	12 VDC ±25%; 24 VAC±25% <i>*LTS recommends using one power adapter to for each camera.</i>
Power Consumption	Max. 7.5 W
Protection Level	IK10, IP67
Material	Metal
IR Range	Up to 197 ft (60 m)
Dimensions	Φ 7.1 × 4.9 in. (Φ 145.2 × 124.1 mm)
Weight	Approx. 1.41 lbs (640 g)

Dimensions

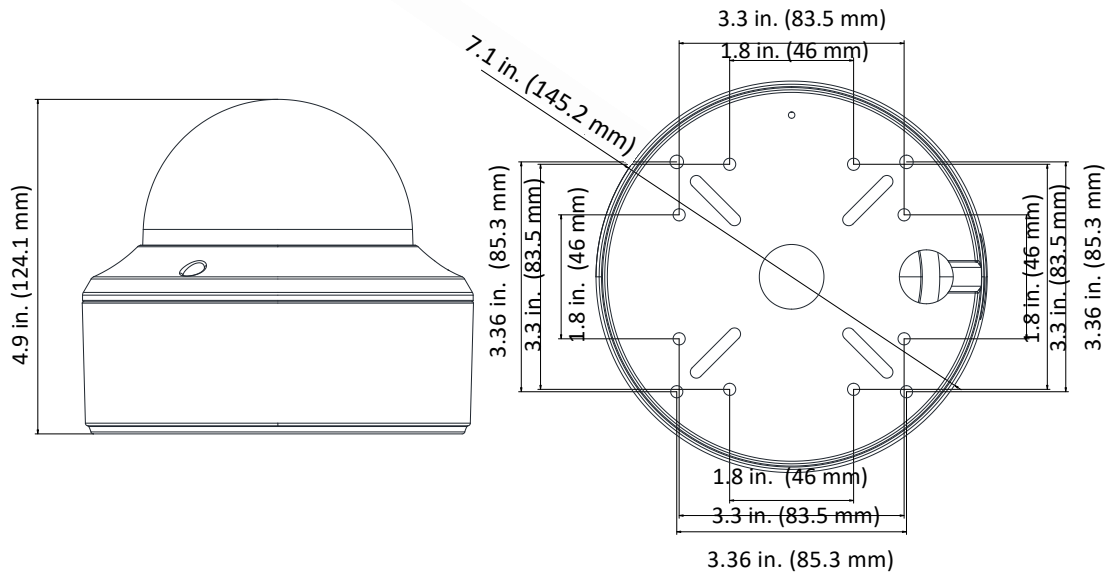

Accessories



LTB342-140
Wall Mount




LTB378
Vertical Pole Mount



LTB379
Corner Mount



LTB342-140B
Wall Mount



LTB340
In-ceiling Mount

