

CMHR9282-28F Platinum 8 MP 4-in-1 Bullet HD-TVI Camera




Key Features

- 8.29 MP high performance CMOS
- 3840 × 2160 resolution
- 2.8 mm fixed lens
- Matrix IR 2.0, smart IR with up to 197 ft (60 m) range
- 4-in-1 switchable video output
- DWDR, DNR
- IP67 protection rating
- OSD Menu via UTC technology with Platinum DVR


Specifications

Camera	
Image Sensor	8.29 MP progressive scan CMOS
Signal System	PAL / NTSC
Frame Rates	TVI: 8 MP @ 12.5 / 15 fps; 5 MP @ 20 fps; 4 MP @ 25 / 30 fps; 2 MP @ 25 / 30 fps CVI: 8 MP @ 12.5 / 15 fps AHD: 5 MP @ 20 fps CVBS: 960H P/N
Resolution	3840 (H) × 2160 (V)
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC on), 0 Lux with IR
Shutter Speed	PAL: 1/12.5 to 1/50,000 sec. NTSC: 1/15 to 1/50,000 sec.
Lens	2.8 mm fixed lens
Horizontal Field of View	102.2° (2.8 mm)
Lens Mount	M16
Day & Night	IR cut filter
Angle Adjustment (Bracket)	Pan: 0° to 360°, Tilt: 0° to 180°, Rotate: 0° to 360°
Synchronization	Internal synchronization
Digital Wide Dynamic Range (DWDR)	105 dB
Menu	
AGC	Yes
Day / Night Mode	Auto / Color / B & W
White Balance	Auto / Manual
Backlight Compensation (BLC)	Yes
Language	English
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
Interface	
Video Output	1 HD analog output
Switch Button	TVI / AHD / CVI / CVBS
General	
Operating Conditions	ππλς ú2 μπλς C óππλς ú2 ςλς / úτ humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 5.3 W
Protection Levelă	IP67
Materială	Front cover: Metal Main body: Plastic Bracket: Metal
IR Range	Up to 197 ft (60 m)
Communication	Up the coax, TVI output
Dimensions	81.9 × 86.7 × 217.9 mm ()
Weight	Approx. 435 g (0.96 lb.)

Dimensions

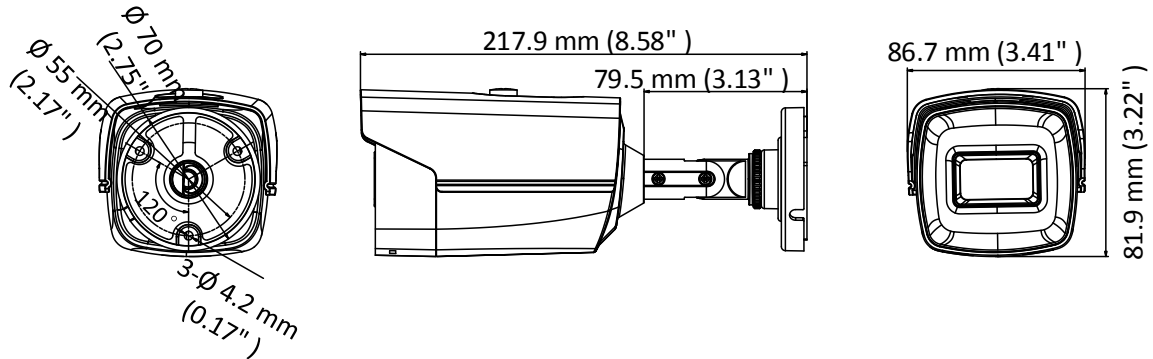

Accessories

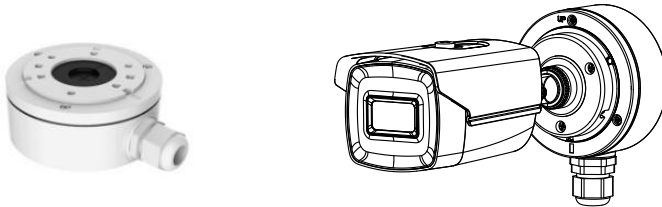

LTB345
Junction Box