


Mifare Card Reader


LTK1103M and LTK1103MK

Key Features:

- Built-in audible beeper;
- Display the reader status with LED indicator;
- Watchdog design for repairing itself in case that exception occurs, to ensure the long service life of the reader;
- Dust-proof and water-proof design

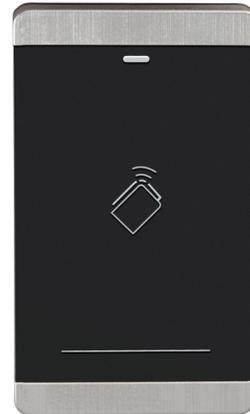

LTK1103M

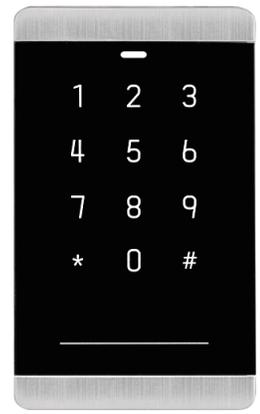

LTK1103MK

Properties

| | |
|---------------------|--|
| Power Supply | DC 12V |
| Working Current | ≤500mA |
| Processor | 32-bit |
| Reading Frequency | 13.56MHz |
| Reading Range | 30 to 50mm (1.18 to 1.96") |
| ID Settings | Setting by the DIP Switch on the Main Board |
| Audio Alert | Beeper |
| Power Consumption | ≤6W |
| Keypad | No Keypad for LTK1103M; Keypad with 12 Keys (0 to 9, *, #) for LTK1103MK |
| Certifications | FCC, CE |
| LED Indicator | Power Indicator; Status LED Indicator |
| Working Temperature | -40°F to +158°F(-40°C to +70°C) |
| Working Humidity | 10 % to 90 % (Non-Condensing) |
| Water-proof | IP64 |
| Dimensions | 5.08"x2.99"x0.58"(129mm×76mm×14.7mm) |
| Weight | ≤ 0.33lb (0.15Kg) |
| Installing Method | Only applied for 120 Gang Box |