

Platinum Enterprise Level 64 Channel NVR 2U LTN0764-R8




Key Features:

- Up to 64 network cameras can be connected
- Simultaneous HDMI and VGA outputs
- HDMI2 output supports at up to 3840×2160/30Hz resolution, and HDMI1/VGA output at up to 1920×1080 resolution
- Up to 16-ch synchronous playback
- Support HDD quota mode
- Up to 8 SATA hard disks and 1 eSATA disk can be connected, for both recording and backup
- Hot-swappable HDD supporting RAID0, RAID1, RAID5, RAID10 storage scheme. And 8 virtual disks can be configured

Rear Panel:

1. USB Interface
2. Audio In
3. Audio Out
4. VGA
5. HDMI1/HDMI2
6. RS-232 Serial Interface
7. eSATA Interfaces
8. LAN1, LAN2 Network Interface
9. Termination Switch
10. RS-485 Serial Interface, Keyboard Interface
11. Alarm In/Out
12. GND
13. 100~240VAC Power Input
14. Power Switch

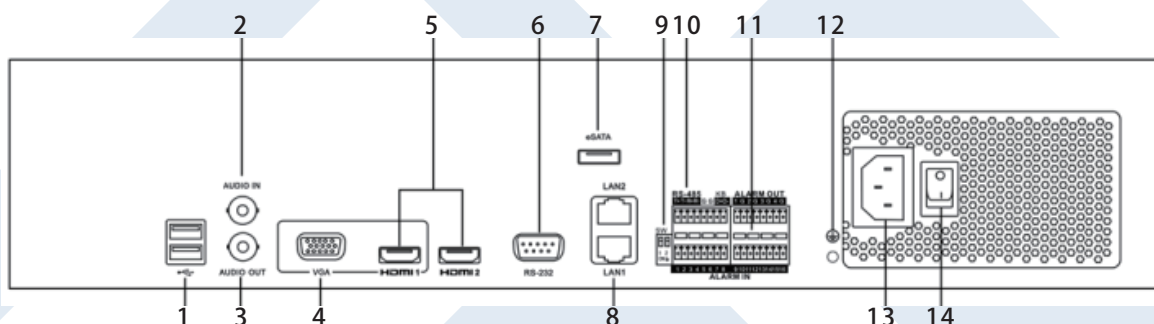

Platinum Enterprise Level 64 Channel NVR 2U

LTN0764-R8

Video/Audio Input	
IP Video Input	64-CH
Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	768Mbps(RAID disabled),512Mbps(RAID enabled)
Outgoing bandwidth	768Mbps(RAID disabled),512Mbps(RAID enabled)
Remote connection	128
Network Protocol	HIKVISION, ACTi, ARECONT, AXIS, BOSCH, BRICKCOM, CANON, HUNT, ONVIF(Version 2.4), PANASONIC, PELCO, PSIA, SAMSUNG,SANYO, SONY, VIVOTEK, ZAVIO
HDMI output	2-CH, resolution: HDMI1:1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz; HDMI2: 3840×2160/30Hz, 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 ×1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
VGA output	1-CH, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.264, MPEG4, M-JPEG
Recording resolution	8MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-CH
Hard disk	
SATA	8 SATA interfaces for 4 HDDs + 1 DVD-R/W (default), or 8HDDs
eSATA	1 eSATA interface
Capacity	Up to 6TB capacity for each HDD
Disk array	
Array type	RAID0, RAID1, RAID5, RAID10
Number of array	8
Interface	
Network interface	2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces
Serial interface	RS-232; RS-485; Keyboard;
USB interface	2 × USB 2.0 on front panel and 2 × USB 3.0 on rear panel
Alarm in/out	16/4
General	
Power supply	100 ~ 240 VAC, 50 ~ 60 Hz
Consumption	≤ 100 W(without hard disk or DVD-R/W)
Working temperature	14°F ~ 131°F(-10 °C ~ +55 °C)
Working humidity	10 % ~ 90 %
Casing	19-inch rack-mounted 2U chassis
Dimensions	17.5" ×18.5"×3.5"(445 × 470 ×90 mm)
Weight	≤ 17.64 lb (8 Kg,without hard disk or DVD-R/W)