


LTN7608-P8/7616-P8

Embedded NVR



LTN7608-P8/7616-P8

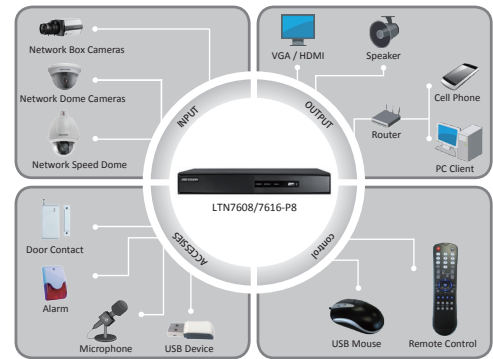

Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P
- HDD quota and group management
- 8 independent network interfaces for built-in switch

Rear Panel of LTN7608-P8/LTN7616-P8



- LAN Network Interface
- RS-485 Interface
- 100~240VAC Power Input
- Power Switch
- USB Interface
- GND
- HDMI Interface
- VGA Output
- Audio In
- Audio Out
- Network Interfaces with PoE function

	LTN7608-P8	LTN7616-P8
Video/Audio input		
IP video input	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)	
Incoming bandwidth	40Mbps	80Mbps
Video/Audio output		
Decoding resolution	5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF	
HDMI / VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz	
CVBS	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC) (optional)	
Audio output	1-ch, RCA (Linear, 1kΩ)	
Playback resolution	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF	
Synchronous playback	8-ch	16-ch
Hard disk		
SATA	2 SATA interfaces for 2 HDDs	
Capacity	Up to 4TB for each disk	
External interface		
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface	
Built-in switch network interface	8 independent 10 /100 Mbps Ethernet interfaces	
Serial interface	1 RS-485 half-duplex interface	
USB interface	2 × USB 2.0	
Alarm in / out	4 / 1 (optional)	
General		
Power supply	100 ~ 240 VAC, 47 ~ 63 Hz, 3A	
Consumption	≤ 15 W (without hard disk)	
Working temperature	-10 ° C ~ +55 ° C	
Working humidity	10% ~ 90%	
Chassis	19-inch rack-mounted 1U chassis	
Dimensions	445 × 290 × 45mm (W × D × H)	
Weight	≤ 2 Kg (without hard disk)	

* 8 independent 10 / 100 Mbps Ethernet interfaces (for built-in switch)