


# CMHR9923DW


## HD1080P HD-TVI Outdoor Vari-focal Bullet Camera

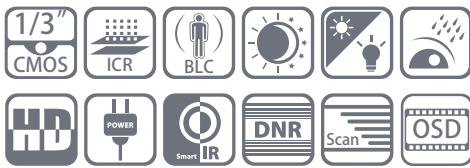

### Key features

- 2.1MP High Definition
- 1920x1080P@30fps
- True Day/Night
- 2.8 - 12mm vari-focal lens
- 120dB True WDR, 3D DNR, Smart IR
- 1 Matrix IR LED Up to 175ft(53m)
- OSD Menu via UTC technology with Platinum TVI DVR
- Junction Box Included
- IP66 Weatherproof
- CVBS Output
- Dual Voltage DC 12V / AC 24V

### Dimensions

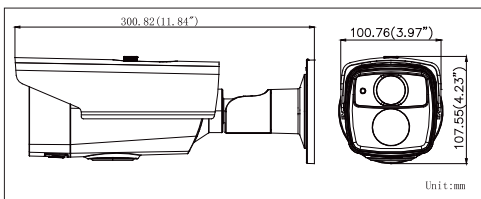

CMHR9923DW	
<b>Camera</b>	
Image Sensor	1 / 3" Sensor
Signal System	NTSC / PAL(Euro Version)
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.014 Lux @ (AGC ON),0 Lux with IR
Shutter speed	NTSC: 1/30 s(PAL: 1/25 s)to 1/50,000 s
Lens	2.8-12mm Angle of view: 92° - 32°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC:1080p@30fps/PAL:1080p@25fps
Video Output	1 CVBS Output, 1 HD TVI Output
S / N Ratio	More than 52dB
<b>Menu</b>	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Function	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM
<b>General</b>	
Working Temperature / Humidity	-4 ° F - 140 ° F (-20 ° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC, 24V AC
Power Consumption	Max. 10W
Weather Proof Ratings	IP66
IR Range	Up to 175ft(53m)
Dimensions(without junction box)	11.8" × 4.0" × 4.2" (300.8×100.8×107.6mm)
Weight(without junction box)	1.5lb(700g)