

CMIP3132-28S


3.0MP Mini Dome Network Camera



Key features

- 2.8mm fixed lens
- 3 megapixel (2048 x 1536) resolution
- HD real-time video
- Up to 33ft(10m) IR range
- DWDR & 3D DNR & BLC
- 3-Axis
- Onboard storage (up to 64GB)
- IP66 protection, vandal proof
- Audio/Alarm I/O

Dimensions

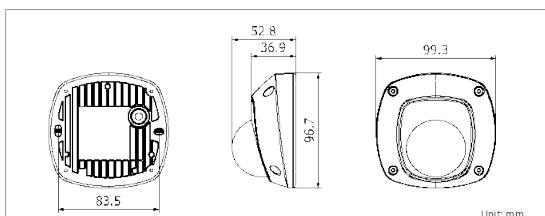

CMIP3132-28S	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.07 lux@F1.2, AGC on 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	2.8mm@F2.0 2048 × 1536:Angle of view: 86° 1920 × 1080:Angle of view: 98.5°
Lens mount	M12
Day & night	ICR
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Backlight compensation	Yes,zone configurable
Compression standard	
Video compression	H.264 / MJPEG
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711/G.726/MP2L2
Audio bit rate	64Kbps(G.711) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. image resolution	2048 × 1536
Frame rate	60Hz: 20fps (2048 x 1536), 30fps (1920 × 1080), 30fps (1280 x 720) 50Hz: 20fps (2048 x 1536), 25fps (1920 × 1080), 25fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
ROI	Yes, up to 3 configurable areas
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect , IP address conflict, storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
System compatibility	ONVIF, PSIA, CGI, ISAPI
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Interface	
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB
Alarm interface	1/1 alarm I/O
General	
Operating conditions	-22 ° F ~ 140 ° F (-30 ° C ~ 60 ° C), humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 5W
Impact protection	IEC60068-2-75Eh, 50J; EN50102, up to IK08
Ingress protection level	IP66
IR range	Up to 33ft(10m)
Dimensions	3.9" × 3.8" × 2.1"(99.3 × 96.7 × 52.8mm)
Weight	1.3lb(600g)