

CMIP9723-S


2MP VF IR Bullet Network Camera



Key features

- Up to 2 megapixel (1920 x 1080) resolution
- Full HD 1080p real-time video
- Vari-focal lens
- Video Content Analytics(VCA)
- Region of Interest(ROI)
- IR LEDs (up to 100ft, about 30m)
- DWDR & 3D DNR & BLC
- IP66 protection
- Onboard storage (up to 64GB)
- Audio I/O, Alarm I/O
- 3-axis adjustment

Dimensions

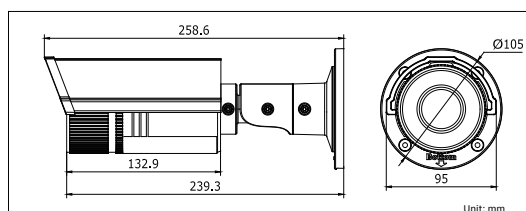

CMIP9723-S	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.014lux @(F1.4,AGC ON) 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	2.8 ~ 12mm @ F1.4, Angle of view: 113° ~33.8°
Lens mount	Φ14
Day & night	ICR
ROI	Yes, up to 4 configurable areas
Digital noise reduction	3D DNR
Wide dynamic range	Digital WDR
Backlight compensation	Yes, zone optional
Compression standard	
Video compression	H.264 / MJPEG
H.264 compression profile	Main profile
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711/G.726/MP2L2
Audio bit rate	64Kbps(G.711) / 16Kbps(G.726)/ 32~128Kbps(MP2L2)
Dual Stream	Yes
Image	
Max. image resolution	1920×1080
Frame rate	60Hz: 30fps (1920×1080) 50Hz: 25fps (1920×1080)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS
Alarm trigger	Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage full , Storage error
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv6,Bonjour
System compatibility	ONVIF, PSIA, CGI, ISAPI
General functionalities	User Authentication, Watermark
Interface	
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB
Audio Input/Output	1/1
Alarm Input/Output	1/1
General	
Operating conditions	-22 ° F ~ 140 ° F (-30 ° C ~ 60 ° C), humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 7.5W
Impact protection	IEC60068-2-75Eh, 50J; EN50102, up to IK10
Ingress protection level	IP66
IR range	Up to 100ft(About 30m)
Dimensions	3.7" × 4.1" × 10.2" (95.0×105.0×258.6 mm)
Weight	2.6lbs(1200g)