


CMT2512H CMT2512HB


1.3 Mega IR Dome Camera

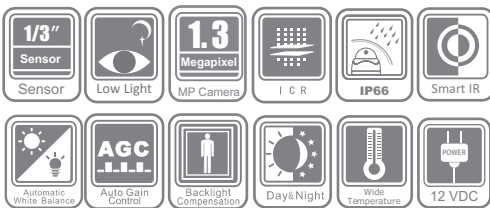

Key features

- 1/3" Sensor
- True Day/Night
- 3.6 Fixed Lens, 0.1 lux /F1.2
- 24 pcs IR LEDs, 100ft(30m) IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range
- IP66 Weatherproof

Dimensions

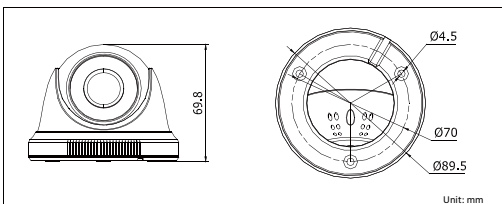

	CMT2512H CMT2512HB
Camera	
Image Sensor	1/3" Sensor
Signal System	NTSC / PAL
Effective Pixels	1280 (H) × 960 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter speed	NTSC: 1/30 s to 1/10,000 s PAL: 1/25 s to 1/10,000 s
Lens	3.6 mm
Day & Night	IR cut filter with auto switch
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 ° C - 60 ° C (-40 ° F - 140 ° F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.5W (Max. 4.5W with IR cut filter on)
Ingress Protection	IP66
Infrared Red Lamps	24 pcs
IR Range	Approx. 100ft(30m)
Dimensions	Φ89.5 × 69.8 mm(Φ3.52" × 2.75")
Weight	260 g (0.57 lbs)

Available models

CMT2512H CMT2512HB