

HDTVI Converter

LTAH5100T




Properties

Physical Interface	BNC, HDMI
Input Level	> 500 mVp-p
Output Format	HDMI 1.4b, A standard interface
Input Auto Cable Equalization	1080 p, 720 p, supporting 100M75-5 cable input with distance of 100M
Input Format	1080 p 25/30, 720 p 25/30/50/60, compatible with V2.0 HDTVI
Input Impedance	75 Ω
Output Resolution	720 p 50/60, 1080 p 50/60
Output Format Distance	HDMI 1.4b, D-type base, 10 M distance
LED	Power LED, video source LED
Power Supply	12 VDC, 1A
Power Consumption	≤ 8 W
Working Humidity	10 % to 90 %
Working Temperature	-86° F to + 167° F
Dimensions (WxDxH)	2.0 x 1.2 x 1.0 "
Mounting Type	Independent


Physical Interface:

Front Panel



1. 12VDC Power Supply
2. BNC Interface
3. BNC Interface
4. Video Source LED
5. Power LED

Rear Panel

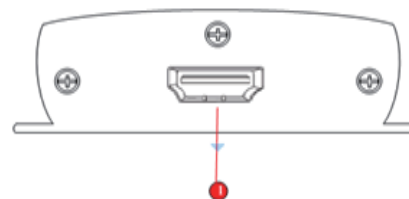

1. HDMI Interface