



Video Solutions for Security Professionals

Platinum Q4 2025

Effective November 2025



Outdoor Box
ALL-IN-ONE



AI Color 24/7
CLEARER
Anti-Corrosion




5-Lens Instadome
EASIER



Panoramic
WIDER



DeepVision
SMARTER



Platinum Product Tiers | Best Selling IP and Video Surveillance

IP Cameras

AI Color 24/7 Pg 11-13



Color 24/7 Pg 14-17



Value Pg 25-29



Entry Pg 30-33



Specialty Cameras

Fisheye Pg 21



Panoramic/ Multi-sensor Pg 19-21



PTZ Pg 23-24



LPR Pg 18



Speaker Pg 18



NVR

DeepVision Pg 35



Enterprise Pg 37



Professional Pg 38



TVI

Color 24/7 with Active Deterrence Pg 40-41



Standard Pg 41-45



DVR

Enterprise Pg 46



Professional Pg 47



Intercom & Access Control

Intercom/Access Control Pg 48-51



Accessories

Accessories Pg 52-58



What Makes Us Stand Out

Since 2009

Founded in 2009, LTS provides industry-leading security solutions and value-added services in video surveillance. We offer a comprehensive range of products, including cameras, intercoms, access control systems, accessories, mobile apps, and software. With offices located nationwide across the United States, we provide same-day pickup, fast shipping, and timely delivery.

First-class Service

- Well-stocked Inventory
- Same Day Delivery
- New Technology Demos
- Shop Online 24/7
- Local Order Pick up
- Membership Rewards
- Free Shipping Available
- Seamless RMA Process

100+ New Products Released Annually

We offer a wide range of high-quality products for diverse applications.

90K Customers Served Annually

120+ Sales/ Techs

- Free Security Solution Consultation
- Sales & tech support from 9am to 9pm ET

200,000+ sq ft Warehouse Space

Global Supply Chain



Icon Glossary



AI Color 24/7



Human / Vehicle Detection



Color 24/7



VCA 3.0



Hybrid Illumination:
IR + White Light



VCA 2.0



Active Deterrence



Direct-Search



Two-Way Audio



Smart Tracking with
Human / Vehicle Classification



Built-in Speaker



Facial Recognition



Built-in Microphone



Face Capture



InstaDome



Fisheye Lens



Anti-Corrosion



Wi-Fi



Vandal Resistant




RAID Supported




License Plate Recognition

Platinum Naming Rules


IP Camera Naming Rule

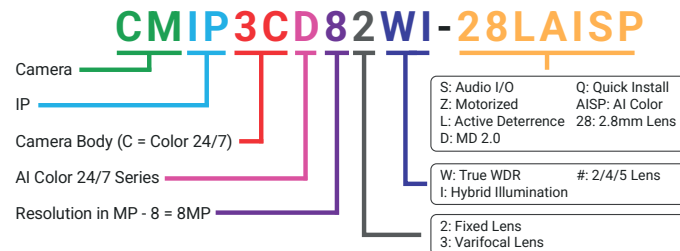


TVI Camera Naming Rule

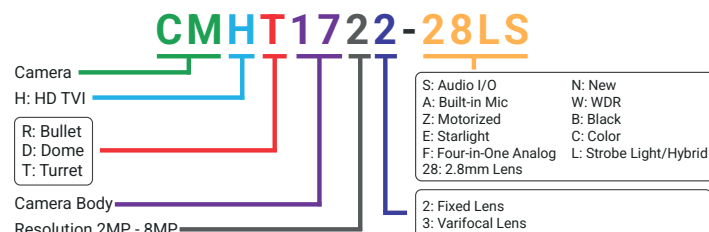


NVR Naming Rule

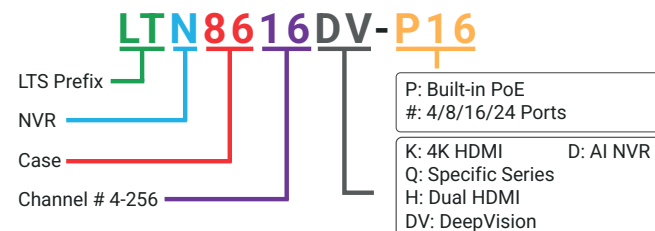

DVR Naming Rule

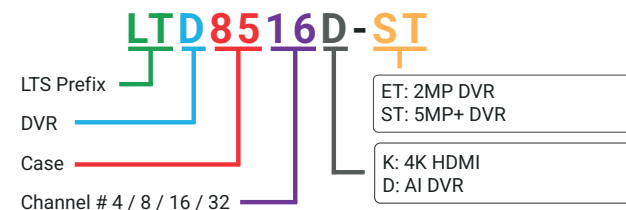

Platinum End-to-End Solution

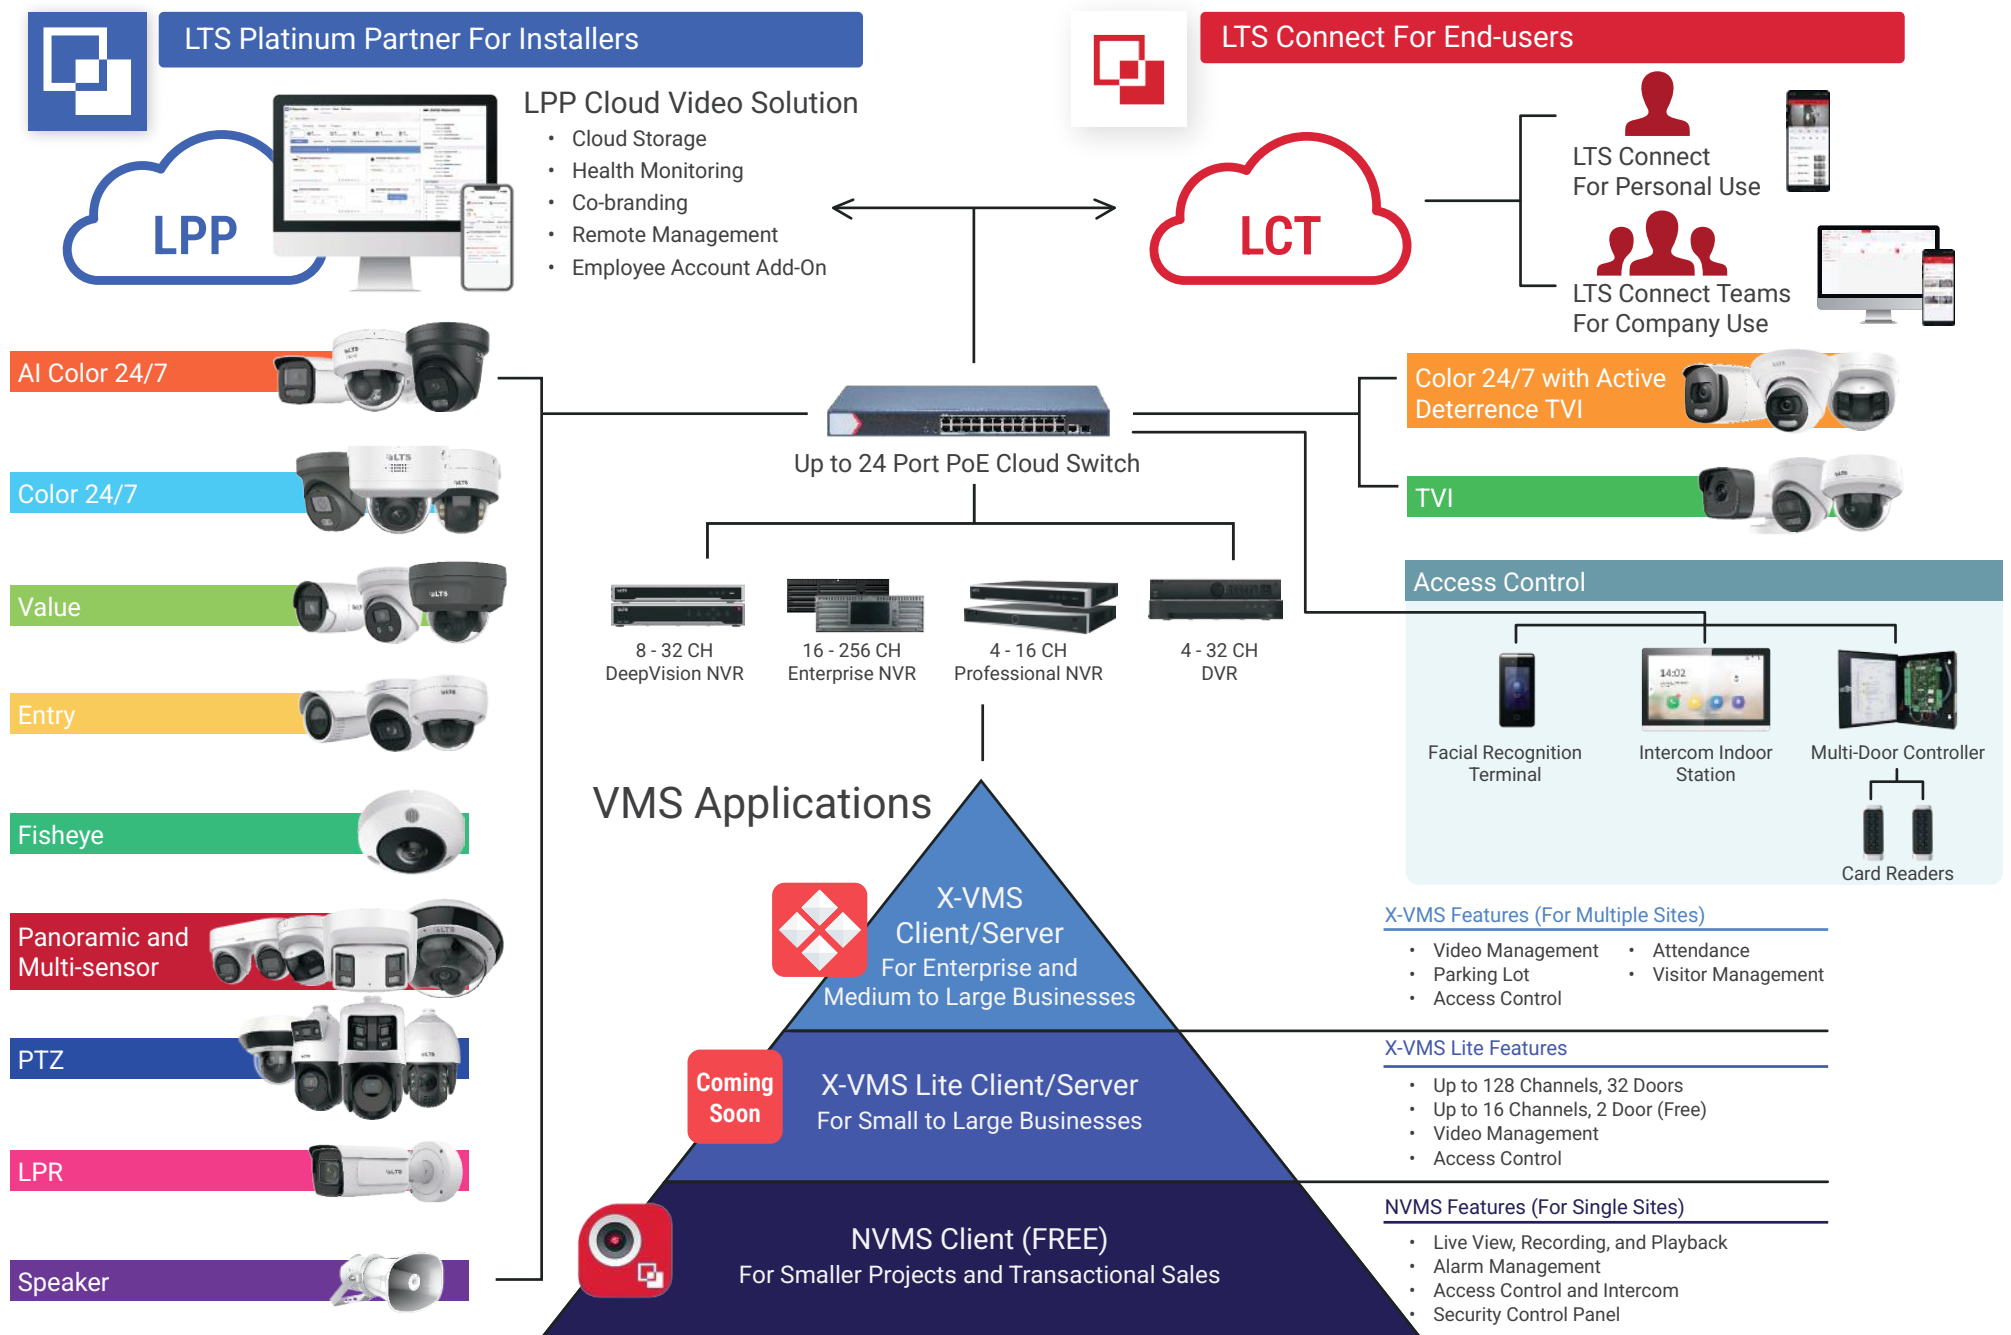


One Software Application for Total Control

X-VMS Architecture

X-VMS Features (For Multiple Sites)

- Video Management
- Parking Lot
- Access Control
- Attendance
- Visitor Management

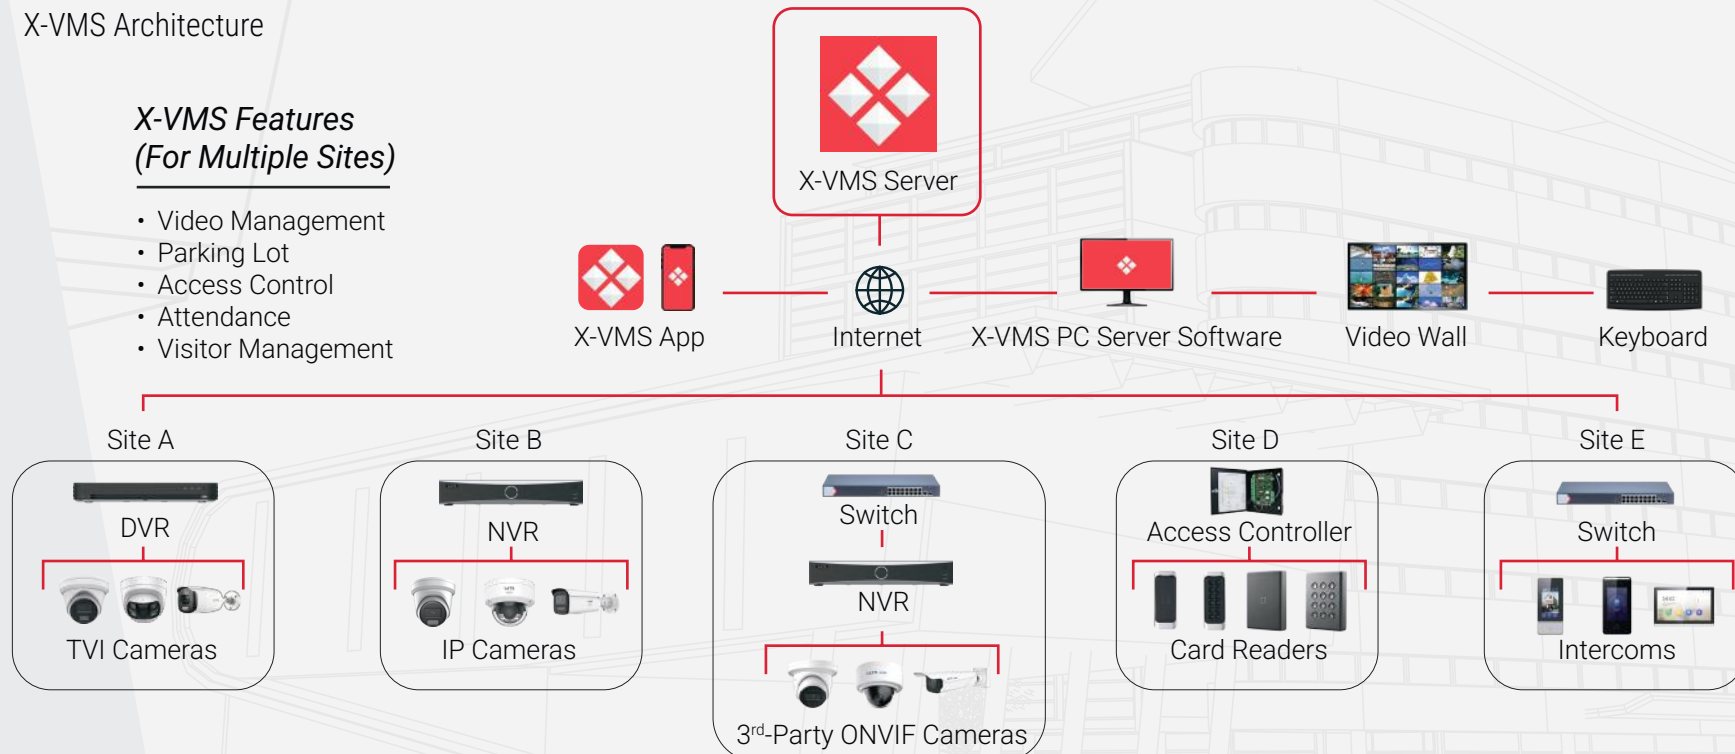

Unified Control Across Sites



X-VMS lets you manage multiple locations, access control systems, intercoms and large groups of cameras/DVRs/NVRs — all from one centralized platform.

Mobile & Web Access Anywhere



Configure, monitor, and respond on the go. Whether on smartphone, tablet, or browser, you stay in control.

Always-On Health Monitoring



Stay in control with real-time and historical system health insights. Our intuitive dashboards make it easy to track device performance, pinpoint issues from the last 30 days, and ensure nothing goes unnoticed.

Dynamic Viewing Modes




Designed for operational precision, our access control software supports versatile viewing modes such as live, panoramic, and grid layouts, enabling efficient surveillance management across diverse environments.

Control Without Compromise

NVMS V3 (FREE)

NVMS Architecture Application

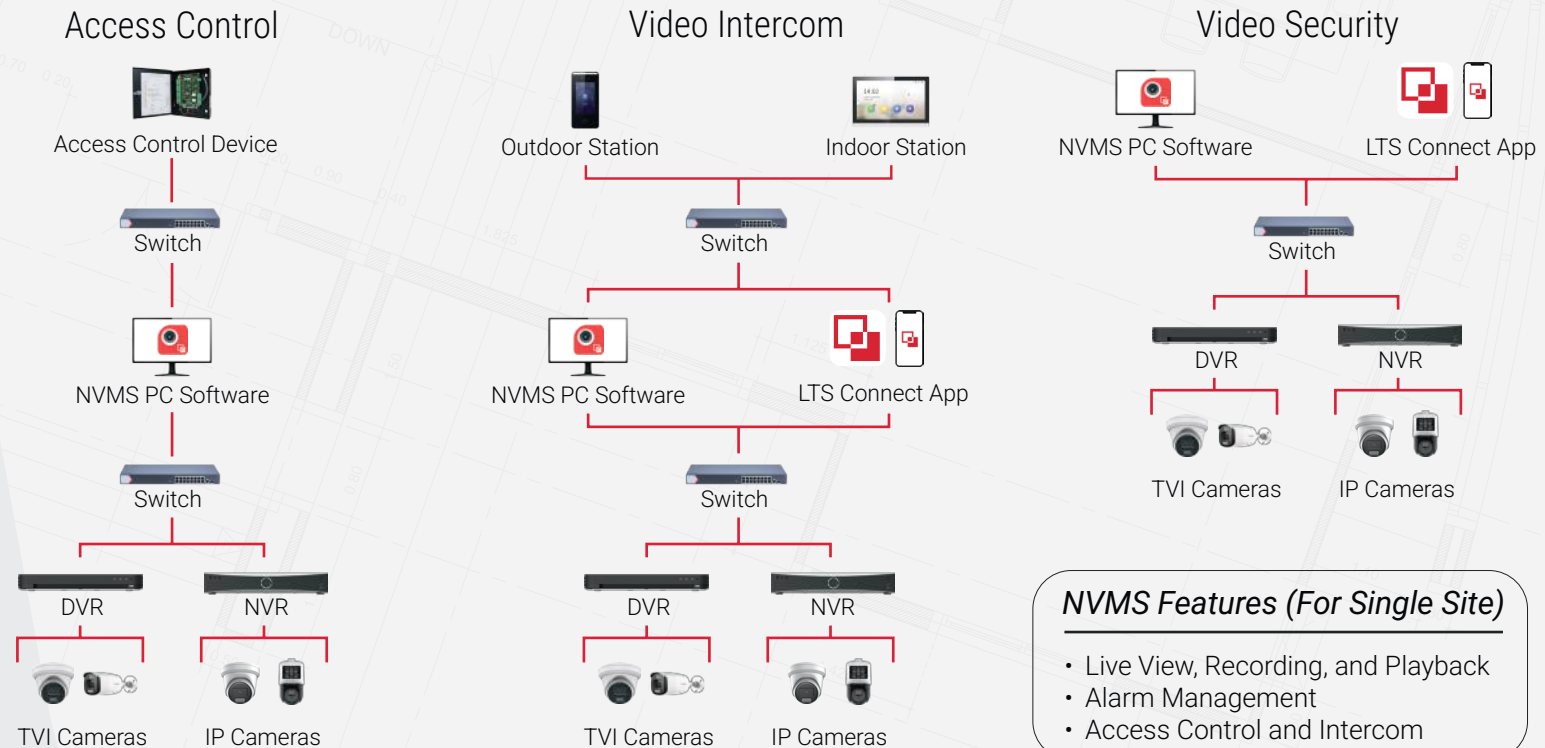

NVMS Features (For Single Site)

- Live View, Recording, and Playback
- Alarm Management
- Access Control and Intercom

Experience Pro Control for Free




Enjoy intelligent video search, smooth navigation, and seamless access management. All without the price tag.

Semantic Search Capabilities



Our access control system integrates with our DeepVision NVRs for Semantic Search, enabling faster and smarter investigation

Designed for Ease

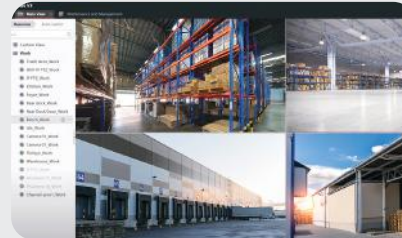

NVMS is an intuitive software that puts full control at your fingertips with a clean design and simple navigation.

Built for Single-Site Control



Designed for single-site security, our software keeps everything simple, fast, and reliable.

LTS Platinum Partner (LPP) - For Installers


Cloud Solution that Boosts Marketing, Lowers Labor Costs, and Creates Recurring Revenue

LPP Basic FREE Feature: Remote Management



LTS Platinum Partner For Installers

LPP allows installers to create sites and share permissions to other installers and end-users

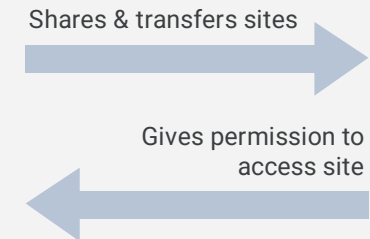


LTS Platinum Partner



Download App

The LTS Platinum Partner Cloud-based solution offers integrated marketing, revenue generation, recurring income, and cloud storage to streamline your business success. Read more below about how these premium paid add-ons can help you grow your business.


LPP Premium Features: Paid Add-ons

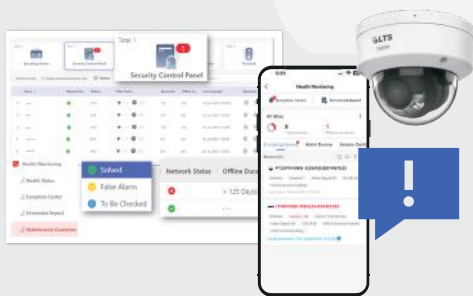

Health Monitoring


Installers can monitor device status and provide remote health management, including:

- Regular inspections for devices, HDDs, and network failures
- Prompt notifications and logs




Co-Branding

- Expand your company's reach with enhanced brand recognition.
- LTS promotes your business by showcasing your logo on the app, NVR interface, and reports, effectively engaging both existing and potential customers.



Employee Account Add-On

- Installers can add users to both new and existing CCTV systems, making it easy for employees to collaborate.
- Employees can be assigned different permission levels based on their roles and responsibilities.



Cloud-based Storage

- With cloud storage, installers can access video content remotely, reducing the risk of losing footage. We offer customizable storage plans.

LTS Connect Teams (LCT) - For End-Users

A user-friendly app designed to help installers access and manage CCTV systems with ease.

Download LTS Connect App on




Apple Store



Google Play

Cloud-Based Service Designed For Everyone

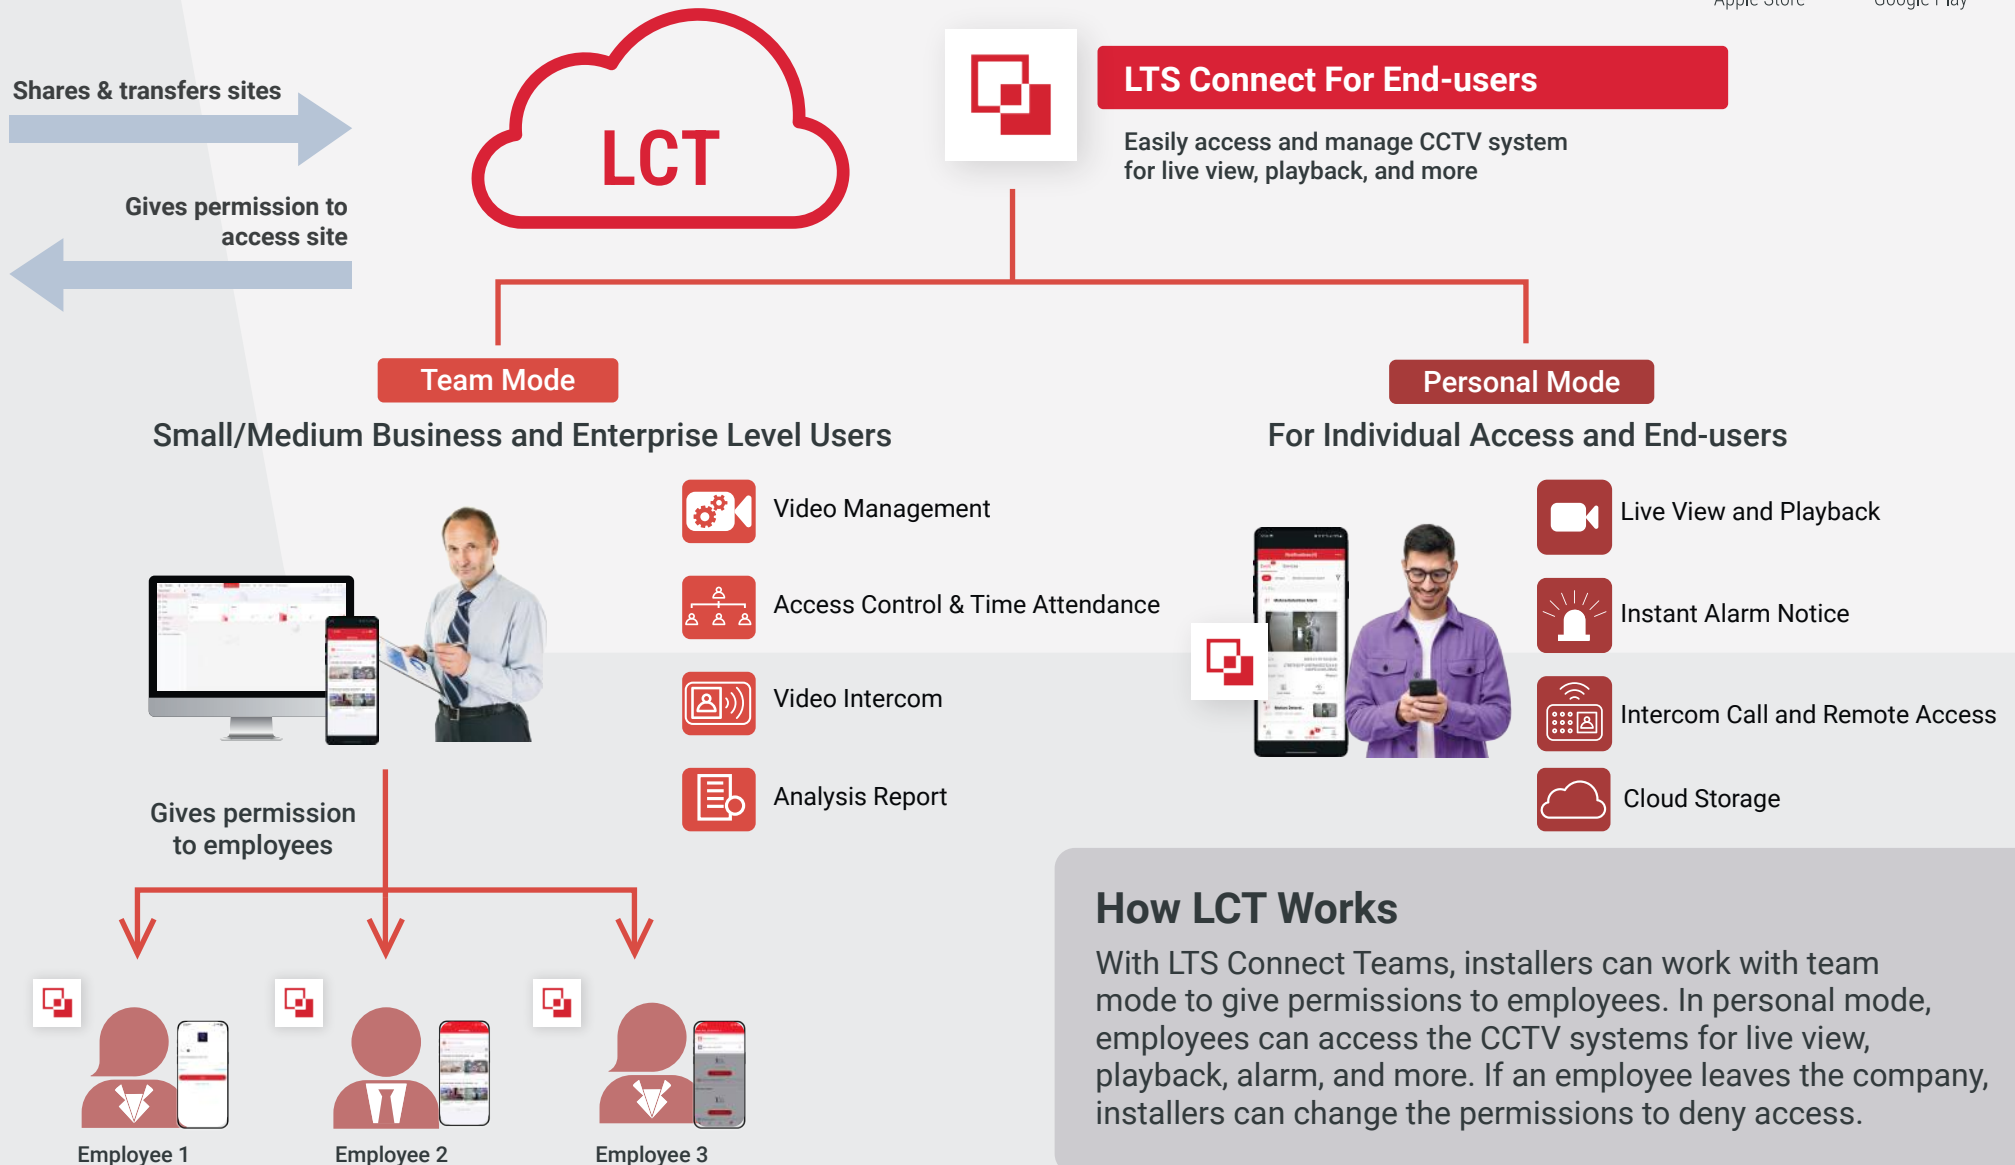


10X Better Color 24/7 Performance to Seal the Deal



LT Security proudly presents AI Color 24/7 cameras, which feature enhanced algorithms and features for outstanding visual performance. Prepare to improve your experience with high-quality images in low light, anti-corrosion housing, AI WDR, higher accuracy rate, enhanced audio, direct-search, and more.

Advanced AI-ISP Enhances Color Image Quality in Low-Light Conditions

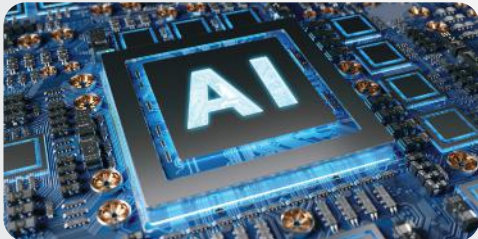

The built-in AI chip brightens images, reduces noise, enhances color accuracy, and provides more detailed clarity. Additionally, this new technology supports color correction and matching. AI WDR improves clarity and detail in environments with high-contrast lighting.

Active Deterrence



The AI Color 24/7 cameras ending in -LAISP feature red and blue strobe lights, along with two-way audio, making them effective for deterring intruders.

Anti-corrosion NEMA 4X Housing for Harsh Conditions


















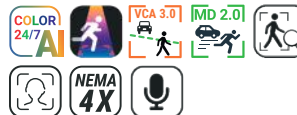
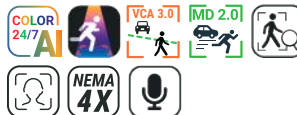










The anti-corrosion NEMA 4X housing can withstand harsh environmental conditions, ensuring reliable yearly performance.

VCA 3.0 for Enhanced Accuracy















Minimize false alarms with our advanced human and vehicle detection algorithm. Combined with line crossing detection, our cameras help identify and alert you to unauthorized movements across defined boundaries.




AI Color 24/7 Cameras

SKU	CMIP3CD42WI-28AISP	CMIP3CD42WIB-28AISP	CMIP3CD42WI-AISP	CMIP3CD82WIB-28AISP	CMIP3CD82WI-AISP	
	 	 	 	  	  	
Featuring						
Max. Resolution	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps	8MP, 3840 x 2160 @ 30 fps	
Lens	2.8mm, Fixed	2.8mm, Fixed	4mm, Fixed	2.8mm, Fixed	4mm, Fixed	
Min. Illumination	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	
Special Features	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic	
Alarm In / Out	-	-	-	-	-	
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	
Protection	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	
Product QR Code						
Compatible Accessories	Compatible with All Cameras Above					
						
	LTB701 LTB701BK Junction Box (White/Black)	LTB342-JBOX Junction Box for LTB342-140	LTB342-140 Wall Mount	LTB341 Pendant Mount 22" (56cm)	LTB378 Pole Mount	LTB379 Corner Mount

*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.






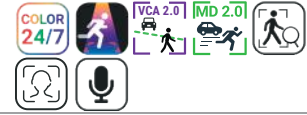
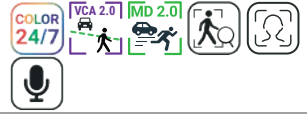

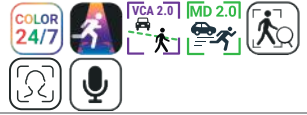






































AI Color 24/7 Cameras		AI Color 24/7 - Active Deterrence				
SKU	CMIP3CD82WI-28AISP	CMIP3CD42WI-28LAISP	CMIP3CD82WI-28LAISP			
	<div><div>4K</div><div></div><div>NEW</div></div>	<div><div></div><div></div><div>NEW</div></div>	<div><div>4K</div><div></div><div>NEW</div></div>			
Featuring	<div><div>COLOR 24/7 AI</div><div>VCA 3.0</div><div>MD 2.0</div><div></div><div></div><div>NEMA 4X</div><div></div></div>	<div><div>COLOR 24/7 AI</div><div>VCA 3.0</div><div>MD 2.0</div><div></div><div></div><div>NEMA 4X</div><div></div><div></div><div></div></div>	<div><div>COLOR 24/7 AI</div><div>VCA 3.0</div><div>MD 2.0</div><div></div><div></div><div>NEMA 4X</div><div></div><div></div><div></div></div>			
Max. Resolution	8MP, 3840 x 2160 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps			
Lens	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed			
Min. Illumination	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS			
Special Features	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, Active Deterrence with Red & Blue Strobe Lights, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, Active Deterrence with Red & Blue Strobe Lights, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			
Audio In / Out	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker			
Alarm In / Out	-	1/1	1/1			
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB			
Protection	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X			
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE			
Product QR Code						
Compatible with All Cameras Above						
Compatible Accessories	<div><div>LTB701 LTB701BK Junction Box (White/Black)</div></div>	<div><div>LTB342-JBOX Junction Box for LTB342-140</div></div>	<div><div>LTB342-140 Wall Mount</div></div>	<div><div>LTB341 Pendant Mount 22" (56cm)</div></div>	<div><div>LTB378 Pole Mount</div></div>	<div><div>LTB379 Corner Mount</div></div>

*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

AI Color 24/7 Cameras															
SKU	CMIP7CD42WI-28AISP			CMIP7CD82WI-28AISP			CMIP8CD42WI-28AISP			CMIP9CD42WI-28AISP			CMIP9CD82WI-28AISP		
	 <div>NEW</div>			<div>4K</div>  <div>NEW</div>			 <div>NEW</div>			 <div>NEW</div>			<div>4K</div>  <div>NEW</div>		
Featuring	<div><div>COLOR 24/7 AI</div><div></div><div></div><div></div><div></div><div></div><div><div>NEMA 4X</div></div><div></div><div></div><div></div></div>			<div><div>COLOR 24/7 AI</div><div></div><div></div><div></div><div></div><div></div><div><div>NEMA 4X</div></div><div></div><div></div><div></div></div>			<div><div>COLOR 24/7 AI</div><div></div><div></div><div></div><div></div><div></div><div><div>NEMA 4X</div></div><div></div></div>			<div><div>COLOR 24/7 AI</div><div></div><div></div><div></div><div></div><div></div><div><div>NEMA 4X</div></div></div>			<div><div>COLOR 24/7 AI</div><div></div><div></div><div></div><div></div><div></div><div><div>NEMA 4X</div></div></div>		
Max. Resolution	4MP, 2688 x 1520 @ 30 fps			8MP, 3840 x 2160 @ 30 fps			4MP, 2688 x 1520 @ 30 fps			4MP, 2688 x 1520 @ 30 fps			8MP, 3840 x 2160 @ 30 fps		
Lens	2.8mm, Fixed			2.8mm, Fixed			2.8mm, Fixed			2.8mm, Fixed			2.8mm, Fixed		
Min. Illumination	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light		
Image Sensor	1/1.8" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS		
Special Features	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture		
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic			IN: 1 line OUT: 1 line Built-in Mic			Built-in Mic			-			-		
Alarm In / Out	1/1			1/1			-			-			-		
MicroSD Storage	Up to 512 GB			Up to 512 GB			Up to 512 GB			Up to 512 GB			Up to 512 GB		
Protection	IP67, IK10, NEMA 4X			IP67, IK10, NEMA 4X			IP67, NEMA 4X			IP67, NEMA 4X			IP67, NEMA 4X		
Power	12V DC, PoE			12V DC, PoE			12V DC, PoE			12V DC, PoE			12V DC, PoE		
Product QR Code															
Compatible Accessories	 LTB347H Junction Box	 LTB742-120B Wall Mount with Junction Box	 LTB742-120 Wall Mount	 LTB347H Junction Box	 LTB742-120B Wall Mount with Junction Box	 LTB742-120 Wall Mount	 LTB345 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount									


























*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

Color 24/7 IP Turret Cameras

SKU	CMIP3C42WI-28MDA CMIP3C42WI-MDA	CMIP3C42NWB-28MDA	CMIP3C42WI-28SDL	CMIP3C82WI-28MDA CMIP3C82WIB-28MDA	CMIP3C82WI-28SDL										
															
Featuring															
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 24 fps	8 MP, 3840 x 2160 @ 24 fps										
Lens	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed										
Min. Illumination	0.001 Lux @ F 1.0, AGC ON, 0 Lux with light	0.001 Lux @ F1.0, AGC ON, B/W: 0 Lux with white light	0.001 Lux @ F 1.0, AGC ON, 0 Lux with light	0.0008 Lux @ F1.0, AGC ON, 0 Lux with suppl. light	0.0008 Lux @ F1.0, AGC ON, 0 Lux with suppl. light										
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS										
Special Features	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search, Face Capture	Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Light, Human/Vehicle Detection, WDR 130 dB, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Light, Human/Vehicle Detection, WDR 130 dB, Face Capture										
Audio In / Out	Built-in Mic	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker										
Alarm In / Out	-	1/1	1/1	-	1/1										
MicroSD Storage	Up to 512 GB	Up to 256 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB										
Protection	IP67	IP67	IP67	IP67	IP67										
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE										
Product QR Code	 2.8 mm Lens  4 mm Lens			 2.8 mm Lens, White  2.8 mm Lens, Black											
Compatible Accessories	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box	 LTB03-W Junction Box
	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount	 LTB331 Pendant Mount


*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

Color 24/7 IP Dome Cameras

SKU	CMIP7C42WI-28MDA			CMIP7C82WI-28MDA			CMIP7C43W-SDZ			
										
Featuring										
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps			8 MP, 3840 x 2160 @ 24 fps			4 MP, 2688 x 1520 @ 30 fps			
Lens	2.8 mm, Fixed			2.8 mm, Fixed			2.8 - 12 mm, Motorized			
Min. Illumination	0.001 Lux @ F1.0, AGC ON, 0 Lux with light			0.0008 Lux @ F 1.0, AGC ON, 0 Lux with light			0.0005 Lux @ F1.0, AGC ON, 0 Lux with White Light			
Image Sensor	1/3" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS			1/1.8" Progressive Scan CMOS			
Special Features	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search, Face Capture			Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture			Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture			
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic			IN: 1 line OUT: 1 line Built-in Mic			IN: 1 line OUT: 1 line			
Alarm In / Out	1/1			1/1			1/1			
MicroSD Storage	Up to 512 GB			Up to 512 GB			Up to 256 GB			
Protection	IP67, IK10			IP67			IP67, IK10			
Power	12V DC, PoE			12V DC, PoE			12V DC, PoE			
Product QR Code										
Compatible Accessories	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount				

*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

Maximize Your Time with Faster, Easier Installation

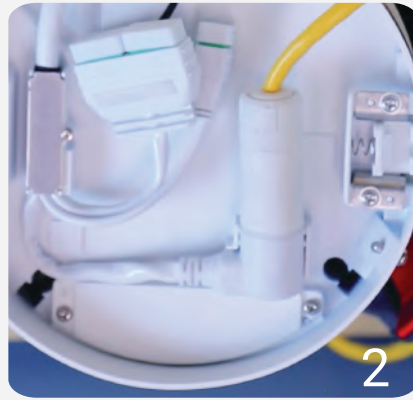

The era of lengthy installation with traditional cameras is over. InstaDome reduces installation time by 5X thanks to its removable plate, cable management, and remotely adjustable lens. It also provides key features such as active deterrence and human and vehicle detection.

Remotely Adjust Lens



Rather than removing the camera to adjust wires and cameras by hand, you can remotely adjust the lens for pan, tilt, zoom, and z-axis via the app.

Active Deterrence



The InstaDome triggers a white strobe light to warn intruders once they enter the detection zone. You can also use the two-way audio feature to discourage unwanted visitors from trespassing.

Organized Cable Management


















The InstaDome has a removable plate that comes off, revealing neatly arranged cables within the junction box, significantly reducing installation times by 80%.








VCA 2.0 Human & Vehicle Detection for Reduced False Alarms
















With VCA 2.0, false alarms are significantly reduced by accurately distinguishing humans and vehicles from non-relevant objects, alerting you to genuine security threats.

Color 24/7 InstaDome					Color 24/7 IP Bullet Cameras			
SKU	CMIP7C43WI-SDLQ				CMIP8C42WI-28MDA			
	 							
Featuring								
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps				4 MP, 2688 x 1520 @ 30 fps			
Lens	2.8 - 12 mm, VF, Motorized				2.8 mm, Fixed			
Min. Illumination	0.0028 Lux @ F1.2, AGC on, 0 Lux with Light on				0.001 Lux @ F1.0, AGC ON, 0 Lux with light			
Image Sensor	1/1.8" Progressive Scan CMOS				1/3" Progressive Scan CMOS			
Special Features	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 120 dB, Face Capture, InstaDome				Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search, Face Capture			
Audio In / Out	IN: 1 line OUT: 1 line 2 Built-in Mics, 1 Built-in Speaker				Built-in Mic			
Alarm In / Out	1/1				-			
MicroSD Storage	Up to 512 GB				Up to 512 GB			
Protection	IP66, IK10				IP67			
Power	12V DC, PoE				12V DC, PoE			
Product QR Code								
Compatible Accessories	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB345 Junction Box			
					 LTB801 Junction Box		 LTB378 Pole Mount	 LTB379 Corner Mount

*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

















































License Plate IP Camera	
SKU	CMIP7943WLPR-32R
	 <p>Junction Box Included</p>
Featuring	  
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps
Lens	8 - 32 mm, Motorized
Min. Illumination	0.0005 Lux @ F1.2, 0 Lux with IR
Supplemental Lighting	Matrix IR up to 328 ft
Special Features	License Plate Recognition, VCA 2.0, Human/Vehicle Detection, WDR 140 dB
License Plate Recognition	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR
MicroSD Storage	Up to 256 GB
Audio In / Out	-
Alarm In / Out	2/2
Protection	IP67, IK10
Product QR Code	
Compatible Accessories	 <p>LTB388 Pole Mount</p>
	 <p>LTB389 Corner Mount</p>

IP Speaker	
SKU	LTA-NHS120-P
	
Featuring	
Max. Acoustic Pressure	121 dB SPL
Speaker Sensitivity	110 dB (1 m 1 W)
Frequency Response	300 Hz to 13 kHz
Microphones	2 x Electret, 100 Hz to 20 kHz
Audio Compression	G.711ulaw (64 Kbps) / G.711alaw (64 Kbps) / MP3 (128 Kbps)
Audio File Format	WAV, MP3, MP2, AAC
Alarm Channels (I/O)	1/1
Ethernet	0/100 Mbps, 1 x RJ45
Storage	64 GB EMMC
Protection Ratings	IP67
Power	12V DC, PoE power passthrough, < 10 W
Product QR Code	

Outdoor Surveillance Box	
SKU	OutdoorBOX-03
	 <p>Installation Plate Included</p>
Featuring	
Material	PC/ASA; LTS White (RAL 9003)
Dimension	448.72mm x 387.53mm x 225.44mm
Weight	5.2kg
Startup and Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)
Add-Ons	Supports up to three cameras and an IP speaker
General Function	Loading Capacity of Front Panel is 8kg; side panel is 5kg
Power	12V DC, PoE power passthrough, < 10 W
Protection	IP66, IK10
Product QR Code	
Compatible Accessories	 <p>LTB345 Junction Box</p>
	 <p>LTB801 Junction Box</p>
	 <p>LTB701 Junction Box</p>
	 <p>LTB347H Junction Box</p>
	 <p>LTB453 Junction Box</p>
	 <p>LTB03-W Junction Box</p>
	 <p>LTB762 Wall Mount</p>

*IP Speaker requires pairing with a built-in mic camera and NVR. Compatible with NVR LTN87XXD with fw (v4.82+), and 86XXD/89XXD (v5.03+). iOS app (v6.8.3+), and Android app (v6.8.3+).

Panoramic IP Cameras

SKU	CMIP384PW-28SDL	CMIP398PW-2SDL	CMIP3C6PW-28SDL	CMIP3C8PW-SDL	CMIP9C8PW-SDL
		 NEW		 4K	 4K Junction Box Included
Featuring	     	    	      	      	      
Max. Resolution	4MP, 3040 x 1368 @ 24 fps	8MP, 4256 x 1888 @ 20fps	6 MP, 3632 x 1632 @ 20 fps	8 MP, 5120 x 1440 @ 20 fps or 15 fps	8 MP, 5120 x 1440 @ 20 fps
Lens	2 x 2.8mm, 180° Horizontal, 81° Vertical	2 x 2mm, 180° Horizontal, 77° Vertical	2 x 2.8mm, 180° Horizontal, 81° Vertical	2 x 4mm, 180° Horizontal, 44° Vertical	2 x 4mm, 180° Horizontal, 44° Vertical
Min. Illumination	0.003 Lux @ F1.6, AGC ON, 0 Lux IR	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light	0.0005 Lux @ F1.0, 0 Lux with suppl. light	0.0005 Lux @ F1.0, 0 Lux with LED Light on	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. light
Image Sensor	2 x 1/2.5" Progressive Scan CMOS	1/2.4" Progressive Scan CMOS	2 x 1/2.5" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS
Special Features	Active Deterrence with White Strobe Light, VCA 2.0, Human/Vehicle Detection, WDR 120 dB	Hybrid Illumination, Active Deterrence with Blue & Red Strobe Light, Human/Vehicle Detection, WDR 120dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic & Speaker	Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker
Alarm In / Out	1/1	-	1/1	1/1	1/1
MicroSD Storage	Up to 512 GB	up to 512 GB	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67	IP67	IP67	IP67
Power	12V DC, PoE	12 VDC, PoE	12V DC, PoE Max 12.5W	12V DC, PoE Max 12.5W	12V DC, PoE
Product QR Code					
Compatible Accessories	 LTB378 Pole Mount  LTB379 Corner Mount  LTB701 Junction Box  LTB342-140 Wall Mount  LTB341 Pendant Mount	 LTB301 Wall Mount  LTB701 Junction Box	 LTB378 Pole Mount  LTB379 Corner Mount  LTB701 Junction Box  LTB342-140 Wall Mount  LTB341 Pendant Mount	 LTB378 Pole Mount  LTB379 Corner Mount  LTB342-155 Wall Mount  LTB722 Junction Box  LTB341 Pendant Mount	 LTB378 Pole Mount  LTB379 Corner Mount  LTB801 Junction Box

*CMIP384PW-28SDL, CMIP3C6PW-28SDL, CMIP3C8PW-SDL, CMIP9C8PW-SDL can work with LTN87Q Series, LTN87D Series, LTN86D Series and LTN89/86 Series NVRs.

Ultimate 5-in-one Instadome Camera



This camera features five multi-directional lens to protect you from all angles. Its greatest strength is the InstaDome technology for remotely adjustable lenses, which allows you to ideally adjust the five lenses to suit your installation site.

Versatile, Customizable Lens for Any Application




This camera has five lenses that are easily adjustable to cover angles such as 360° and 270° to secure your property from all angles. You can customize the lens configuration for different application settings, such as parking lots and corner buildings.

Save Labor Costs with One PoE Cable for Multi-lens Cameras



We are significantly reducing labor costs by utilizing a single PoE (Power over Ethernet) cable to support a camera with five lenses. This approach eliminates the need for five separate cables and cameras, streamlining installation and maintenance while improving efficiency.

InstaDome Technology

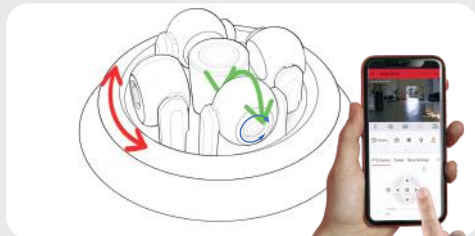


































The camera has a removable plate and organized wire junction box, making installation up to 5X faster. Installers can remotely adjust the pan, tilt, zoom, and z-axis lens via the app to fit your installation site's pain points.

Blind Spot Protection



Unlike other cameras, this camera features a fixed lens at the bottom of the dome for a 360° FOV, enabling direct monitoring underneath.

Multi-lens IP Cameras			Dual Lens Camera
SKU	CMIP7553W4-SZ8	CMIP7553W5-SZ8	CMIP3743W2-DLZ
			
Featuring	 	  	  
Max. Resolution	20 MP Multi-Lens (4 x 5 MP), 2560 x 1920 @ 15 fps	Four: 2560 x 1920 @ 30 fps One: 1440 x 1440 @ 30 fps	Channel 1: 2688 x 1520, Channel 2: 2688 x 1520
Lens	4 x 2.8 - 8 mm, Manually Adjustable Lenses for Pan, Tilt, Zoom, and Rotate	4 x 2.8 - 8 mm, Remotely Adjustable Lenses for Pan, Tilt, Zoom, and Rotate; 1 x 2 mm, Fixed	Channel 1: Varifocal lens, motorized lens, 2.8 mm and 4 mm, Channel 2: Varifocal lens, motorized lens, 2.8 mm and 4 mm
Image Sensor	-	-	Channel 1: 1/3" Progressive Scan CMOS, Channel 2: 1/3" Progressive Scan CMOS
Special Features	VCA 2.0, WDR 120 dB	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, InstaDome	Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Lights, Human / Vehicle Detection, WDR 120dB
MicroSD Storage	Up to 128 GB, ANR	Up to 1 TB	up to 512 GB
Audio In / Out	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	Built-in Mic & Speaker, Arrayed dual-mic
Alarm In / Out	2/2	2/2	-
Protection	IP67, IK10	IP67, IK10	IP67
Min. Illumination	0.0125 lux @ F1.9	0.005 Lux @ F1.2	Channel 1: Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR, Channel 2: Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Supplemental Lighting	IR to 98 ft	Matrix IR LED up to 110 ft	-
Power	12V DC/24V AC, 22W; PoE+ (802.3at), 19W Class4	12V DC, PoE+	12VDC, PoE
Product QR Code			
Compatible Accessories	Compatible with Multi-Lens IP Cameras		
			
			

Fisheye IP Cameras		
SKU	CMIP7106F-SE	CMIP7112F-SE
		
Featuring	  	  
Max. Resolution	6 MP, 2560 x 2560 @ 30 fps	12 MP, 3504 x 3504 @ 30 fps
Lens	1.16 mm fisheye, Fixed	1.16 mm fisheye, Fixed
View	360° fisheye, 180° panoramic	360° fisheye, 180° panoramic
Mode	Multiple Viewing Modes and Virtual PTZ	Multiple Viewing Modes and Virtual PTZ
Supplemental Lighting	IR up to 50 ft	IR up to 50 ft
Min. Illumination	Color: 0.01 Lux @ F2.25, AGC ON B/W: 0.005 Lux @ F2.25, AGC ON B/W: 0 Lux with IR	Color: 0.03 Lux @ F2.2, AGC ON B/W: 0.006 Lux @ F2.2, AGC ON B/W: 0 Lux with IR
MicroSD Storage	Up to 512 GB	Up to 512 GB
Special Features	Human/Vehicle Detection, VCA 2.0, Digital WDR, Heat Mapping, Dewarping, People Counting, Queue Management	Human/Vehicle Detection, VCA 2.0, Digital WDR, Heat Mapping, Dewarping, People Counting, Queue Management
Audio / Alarm	IN: 1 line OUT: 1 line 4 Built-in Mics, 1 Built-in Speaker	2/2 4 Built-in Mics, 1 Built-in Speaker
Protection	IP67, IK10	IP67, IK10
Power	12V DC, PoE	12V DC, PoE
Product QR Code		
Compatible Accessories	Compatible with All Cameras Above	
		
		

Best of Both Worlds: Exceptional Detail and Wide Coverage



The panoramic PTZ camera, which features two separate cameras in one unit, is an excellent choice for monitoring vast areas. The 180° panoramic camera on top captures high-quality images of vast spaces. The PTZ camera below uses a 25x zoom lens to deliver detailed, clear

180° Wide Angle Coverage



The 180° panoramic camera covers vast, broad areas, making it perfect for applications such as roads, railways, airports, public venues, and more.

Save Labor Costs with One Installation




The panoramic and PTZ lenses offer coverage of multiple angles, making it a tremendous cost-efficient solution. A single PoE (Power over Ethernet) cable can support a camera with three lenses to save labor costs.

25x Zoom Lens for Long-Range







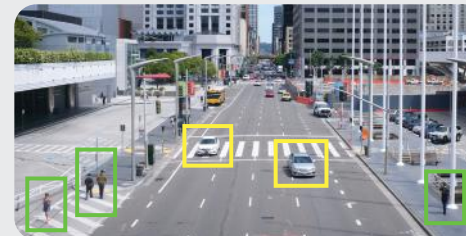











































The PTZ camera below has a 25x zoom lens, which provides detailed, close-up images for tracking humans or vehicles.

Human & Vehicles Auto-tracking








































This panoramic PTZ can zoom in and auto-track humans and vehicles, ensuring your property is safe in sensitive, restricted areas.

PTZ IP Cameras

SKU	PTZIP4C84W-X25IR		PTZIP4C44W-X25IR		PTZIP772NW-X32IR		PTZIP778NW-X25IR	
	  						 	
Featuring	      		      		      		       	
Max. Resolution	Fixed: 8 MP, 3840 x 2160 @ 20 fps PTZ: 4 MP, 2560 x 1440 @ 30 fps		Fixed & PTZ Lens: 4 MP, 2560 x 1440 @ 30 fps		2.1 MP, 1920 x 1080 @ 30 fps		8 MP, 3840 x 2160 @ 24 fps	
Image Sensor	Fixed: 1/2.5" CMOS; PTZ: 1/2.8" CMOS		Fixed: 1/3" CMOS; PTZ: 1/2.8" CMOS		1/2.8" CMOS		1/1.8" CMOS	
Lens(es) and Zoom	Fixed: 2.8 mm Panoramic, 180° Horizontal, 80° Vertical PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus, Tracking		Fixed: 2.8 mm; PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus		4.8 - 153 mm, 32x Optical Zoom, Auto Focus		5.9 - 147.5 mm, 25x Optical Zoom, Auto Focus	
Min. Illumination	Fixed: 0.0005 Lux @ F1.0; PTZ: 0.005 Lux @ F1.6, ACG ON		Fixed: 0.0005 Lux @ F1.0; PTZ: 0.005 Lux @ F1.6, ACG ON		0.005 Lux @ F1.6		0.005 Lux @ F1.5	
Supplemental Lighting	Fixed: White LED up to 100 ft PTZ: IR LED up to 300 ft		Fixed: White LED up to 98 ft; PTZ: IR LED up to 328 ft		IR LEDs up to 656 ft		IR LEDs up to 656 ft	
Special Features	Color 24/7, VCA 2.0, Human/Vehicle Detection, Face Capture (PTZ Only), Smart Tracking with Human/Vehicle Classification		Color 24/7, VCA 2.0, Human/Vehicle Detection, Face Capture (PTZ Only), Smart Tracking with Human/Vehicle Classification		VCA 2.0, Active Deterrence with White Strobe light, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification		VCA 2.0, Active Deterrence with White Strobe light, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification	
MicroSD Storage	Up to 256 GB		Up to 256 GB		Up to 256 GB		Up to 256 GB	
Range of Motion	Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)		Pan 0° - 360°, Tilt -15° - 90° (Auto-flip)		Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)		Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)	
Image Enhancement	Panoramic: Digital WDR PTZ: 120dB WDR		WDR 120 dB		WDR 120 dB		WDR 120 dB	
Audio In / Out	IN: 1 line OUT: 1 line		IN: 1 line OUT: 1 line		IN: 1 line OUT: 1 line Built-in Speaker		IN: 1 line OUT: 1 line Built-in Speaker	
Alarm In / Out	1/1		1/1		2/1		2/1	
Protection	IP66		IP66		IP66		IP66, IK10	
Power	12V DC, PoE+ (802.3at), Max 24 W (max. 11 W for supplemental light, max. 2.6 W for heater)		12V DC, PoE+ (802.3at), Max 24W		24 VAC, High PoE Max 42W (max. 18W for IR, max. 10W for heater)		24 VAC, High PoE Max 42W (max. 18W for IR, max. 10W for heater)	
Dimensions	Φ 4"		Φ 4"		Φ 7"		Φ 7"	
Product QR Code	Wall Mount Bracket (LTB212) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB212) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately		Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately	
Compatible with All Cameras Above								
Compatible Accessories								
	LTB751-20 Pendant Mount 7.8" (20cm)	LTB751 Pendant Mount 20" (50cm)	LTB742 Parapet Wall Mount	LTB762 Wall Mount	LTB378 Pole Mount (Must Use LTB762)	LTB379 Corner Mount (Must Use LTB762)	LTB397 Corner Mount (Must Use LTB212 or LTB762)	POE-PTZPI60N High PoE+ (60W)











































*Facial Recognition feature is only available with compatible NVR (-D) models.

PTZ IP Cameras										
SKU	PTZIP424W-X25IR				PTZIP514NW-X25IR					
										
Featuring	     				     					
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps				4 MP, 2560 x 1440 @ 30 fps					
Image Sensor	1/2.8" CMOS				1/2.8" CMOS					
Lens and Zoom	4.8 - 120 mm, 25x Optical Zoom, Auto Focus, Auto Tracking				4.8 - 120 mm, 25x Optical Zoom, Auto Focus					
Min. Illumination	0.005 Lux @ F1.6				0.005 Lux @ F1.6					
Supplemental Lighting	IR LEDs up to 164 ft, Auto Intensity Adjustment				IR LEDs up to 492 ft					
Special Features	VCA 2.0, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification				VCA 2.0, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification					
MicroSD Storage	Up to 256 GB				Up to 256 GB					
Range of Motion	Pan 0° - 360°, Tilt -5° - 90°				Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)					
Image Enhancement	WDR 120 dB				WDR 120 dB					
Audio In / Out	IN: 1 line OUT: 1 line				IN: 1 line OUT: 1 line					
Alarm In / Out	2/2				2/1					
Protection	IP66				IP66					
Power	12V DC, PoE+ (802.3at), Max 24W				24 VAC, PoE+ (802.3at), Max 24W (max. 9 W for IR and max. 1.6 W for heater)					
Dimensions	Φ 4"				Φ 5"					
Product QR Code	Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately				Wall Mount Bracket (LTB762) Included, PoE+ (30W) Sold Separately					
Compatible Accessories	 LTB412 Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB342-JBOX Junction Box	 LTB751-20 Pendant Mount 7.8" (20cm)	 LTB751 Pendant Mount 20" (50cm)	 LTB742 Parapet Wall Mount	 LTB378 Pole Mount (Must use LTB762)	 LTB397 Corner Mount (Must Use LTB212 or LTB762)	 LTB762 Wall Mount

Palm-size PTZ IP Cameras			
SKU	PTZIP204W-X4IR		
			
Featuring	     		
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps		
Image Sensor	1/3" CMOS		
Min. Illumination	0.005 Lux @ F1.6		
Lens and Zoom	2.8 - 12 mm, 4x Optical Zoom		
Supplemental Lighting	IR LEDs up to 66 ft, Auto Intensity Adjustment		
Range of Motion	Pan 0° - 330°, Tilt 0° - 90°		
Special Features	VCA 2.0, Human/Vehicle Detection, WDR 120 dB		
MicroSD Storage	Up to 256 GB		
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic		
Protection	IP66, IK10		
Power	12V DC, PoE Max 12W		
Dimensions	Φ 2.5"		
Product QR Code	PoE Injector and Wall Mount (LTB202) Sold Separately		
	 LTB347H/ LTB347HB Junction Box (White/Black)	 LTB202 Wall Mount	 LTB774 Pendant Mount 78" (200cm)


*Facial Recognition feature is only available with compatible NVR (-D) models.

Turret IP Cameras

SKU	CMIP3342WI-28SDL CMIP3342WIB-28SDL			CMIP3382WI-28SDL CMIP3382WIB-28SDL			CMIP3283W-SDZ			
	<div><div>4K</div><div>NEW</div></div>			<div><div>4K</div><div>NEW</div></div>			<div><div>Junction Box Included</div></div>			
Featuring	<div></div>			<div></div>			<div></div>			
Max. Resolution	4MP, 2688 × 1520 @ 30 fps			8MP, 3840 × 2160 @ 20 fps			8 MP, 3840 x 2160 @ 20 fps			
Image Sensor	1/2.9" Progressive Scan CMOS			1/2.8" Progressive Scan CMOS			1/2.8" Progressive Scan CMOS			
Lens	2.8 mm, Fixed			2.8 mm, Fixed			2.8 - 12 mm, Motorized			
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light			Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light			0.005 Lux @ F1.6			
Smart Focus	-			-			Yes			
Supplemental Lighting	-			-			Matrix IR LED up to 130 ft			
Special Features	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm			Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm			VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search			
Audio In / Out	Built-in Mic & Speaker, Arrayed Dual Mic			Built-in Mic & Speaker, Arrayed Dual Mic			IN: 1 line OUT: 1 line			
Alarm In / Out	-			-			1/1			
MicroSD Storage	Up to 512GB			Up to 512GB			Up to 256GB			
Protection	IP67			IP67			IP67, IK10			
Power	12V DC, PoE			12V DC, PoE			12V DC, PoE			
Product QR Code										
Compatible Accessories	 LTB301 Wall Mount	 LTB331 Pendant Mount	 LTB307/LTB307BK Junction Box	 LTB301 Wall Mount	 LTB331 Pendant Mount	 LTB307/LTB307BK Junction Box	 LTB701 Junction Box	 LTB342-140 Wall Mount		
	 LTB03-W/ LTB03-B Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB03-W/ LTB03-B Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB341 Pendant Mount 22\" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	























*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

Mini Dome Fixed Lens IP Cameras

SKU	CMIP3142W-28SDA	CMIP3142W-28SDA-WIFI	CMIP3162W-28SDA	CMIP3182W-28SDA	CMIP1C42W-28MDA	CMIP1C42WB-28MDA
				 NEW	 NEW	 NEW
Featuring	      	       	      	      	        	        
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8MP, 3840 x 2160 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6, AGC ON 0 Lux with IR	0.0005 Lux @ F1.0, AGC ON 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON 0 Lux with suppl. Light
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft
Special Features	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, Direct-Search	Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture	Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic
Alarm In / Out	1/1	1/1	1/1	1/1	1/1	1/1
Built-in Wi-Fi	-	2.4 GHz, 802.11g/n	-	-	-	-
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB
Protection	IP67, IK8	IP67, IK8	IP67, IK8	IP67, IK8	IP67, IK8	IP67, IK8
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code						
Compatible with All Cameras Above						
Compatible Accessories	 LTB347H/ LTB347HB Junction Box (White/Black)	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount















*Direct-Search and Facial Recognition features are only available with compatible NVR (-D) models.

Dome Fixed Lens IP Cameras



































































SKU	CMIP7342WI-28MDA			CMIP7382WI-28MDA		
	<div><div>NEW</div></div>			<div><div>4K</div><div>NEW</div></div>		
Featuring	<div></div>			<div></div>		
Max. Resolution	4 MP, 2688 × 1520 @ 30 fps			8MP, 3840 × 2160 @ 20 fps		
Lens	2.8mm, Fixed			2.8 mm, Fixed		
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light			Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with light		
Image Sensor	1/2.9" Progressive Scan CMOS			1/2.8" Progressive Scan CMOS		
Special Features	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB			Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB		
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic, Arrayed Dual-Mic			IN: 1 line OUT: 1 line Built-in Mic, Arrayed Dual-Mic		
Alarm In / Out	1/1			1/1		
MicroSD Storage	up to 512GB			up to 512GB		
Protection	IP67, IK10			IP67, IK10		
Power	12 VDC, PoE			12 VDC, PoE		
Product QR Code						
Compatible Accessories	Compatible with All Cameras Above					
	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

*Direct-Search feature is only available with compatible NVR (-D) models.

Dome Vari-focal Lens IP Cameras





















SKU	CMIP7243W-SDZ	CMIP7283W-SDZ		
	<div></div> <div>Junction Box Included</div>	<div><div>4K</div></div> <div>Junction Box Included</div>		
Featuring	<div><div>VCA 2.0</div><div>IMD 2.0</div><div></div><div></div><div></div></div>	<div><div>VCA 2.0</div><div>IMD 2.0</div><div></div><div></div><div></div></div>		
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 × 2160 @ 20 fps		
Lens	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6		
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft		
Smart Focus	Yes	Yes		
Special Features	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search		
Audio In / Out	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line		
Alarm In / Out	1 / 1	1 / 1		
MicroSD Storage	Up to 256 GB	Up to 256 GB		
Protection	IP67, IK10	IP67, IK10		
Power	12V DC, PoE	12V DC, PoE		
Product QR Code				
Compatible Accessories	Compatible with All Cameras Above			
	<div></div> <div>LTB342-155 Wall Mount</div>	<div></div> <div>LTB342-JBOX Junction Box for Wall Mount</div>	<div></div> <div>LTB378 Pole Mount</div>	<div></div> <div>LTB379 Corner Mount</div>































*Direct-Search feature is only available with compatible NVR (-D) models.



















Bullet Vari-focal Lens IP Cameras					Bullet Fixed Lens IP Cameras	
SKU	CMIP9743W-SDZ	CMIP9763W-SDZ	CMIP9783W-SDZ	CMIP9243W-SZ	CMIP9342WI-28SDL	CMIP9382WI-28SDL
	 Junction Box Included	 Junction Box Included	 Junction Box Included	 Junction Box Included	 NEW	 NEW
Featuring	     	     	     	     	      	      
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps	4 MP, 2560 x 1440 @ 60 fps	4MP, 2688 x 1520 @ 30fps	8MP, 3840 x 2160 @ 20fps
Lens	2.8 - 12 mm, Motorized	2.8 - 12 mm, Motorized	2.8 - 12 mm, Motorized	4.7 - 118 mm, Motorized	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.007 Lux @ F1.2	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Image Sens	1/3" Progressive Scan CMOS	-	1/2.8" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Supplemental Lighting	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	IR up to 656 ft	-	-
Special Features	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 140 dB, Face Capture	Hybrid Illumination, VCA 2.0, True WDR 120dB, Human/Vehicle Detection, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm	Hybrid Illumination, VCA 2.0, True WDR 120dB, Human/Vehicle Detection, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm
Audio In / Out	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line Built-in Mic & Speaker, Arrayed Dual-Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker, Arrayed Dual-Mic
Alarm In / Out	1 / 1	1 / 1	1 / 1	2 / 2	1/1	1/1
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 128 GB	up to 512GB	up to 512GB
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12 VDC, PoE	12 VDC, PoE
Product QR Code						
Compatible Accessories	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount
	 LTB801 Junction Box	 LTB801-A Junction Box	 LTB801 Junction Box	 LTB801-A Junction Box	 LTB801 Junction Box	 LTB801-A Junction Box
	 LTB388 Pole Mount	 LTB389 Corner Mount			 LTB801 Junction Box	 LTB378 Pole Mount








*Direct-Search feature is only available with compatible NVR (-D) models.

Turret Fixed Lens IP Cameras

SKU	CMIP1342WE-28MDA	CMIP1382NW-28MA	CMIP1382WE-28MDA				
							
Featuring	  		  				
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	8 MP, 3840 x 2160 @ 15 fps				
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed				
Min. Illumination	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.01 Lux @ F2.0				
Smart Focus	-	-	-				
Supplemental Lighting	Matrix IR and White Light up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR and White Light up to 100 ft				
Special Features	Hybrid Illumination, Human/Vehicle Detection, WDR 120 dB	WDR 120 dB	Hybrid Illumination, Human/Vehicle Detection, WDR 120 dB				
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic				
MicroSD Storage	Up to 512 GB	Up to 256 GB	Up to 512 GB				
Protection	IP67	IP67	IP67				
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE				
Product QR Code							
Compatible Accessories	Compatible with All Cameras Above						
							
	LTB03-W	LTB307	LTB301	LTB342-JBOX	LTB371	LTB331	LTB378
	Junction Box	Junction Box	Wall Mount	Junction Box for Wall Mount	Pendant Mount 21.5\" data-bbox="548 858 594 878"/>	Pendant Mount 21.5\" data-bbox="648 858 694 878"/>	Pole Mount

Turret Fixed Lens IP Cameras					Turret Vari-focal IP Cameras							
SKU	CMIP1042W-28MA				CMIP1043NW-MZ				CMIP1043W-MDZ			
												
Featuring												
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps				4 MP, 2560 x 1440 @ 20 fps				4MP, 2560 x 1440 @ 24 fps			
Lens	2.8 mm, Fixed				2.8 - 12 mm, VF, Motorized				2.8 - 12 mm, Motorized			
Min. Illumination	0.01 Lux @ F2.0				0.005 Lux @ F1.6				0.005 Lux @ F1.6, AGC ON 0 Lux with IR			
Smart Focus	-				Yes				-			
Supplemental Lighting	Matrix IR LED up to 100 ft				Matrix IR LED up to 100 ft				Matrix IR LED up to 100 ft			
Special Features	WDR 120 dB				WDR 120 dB				Human/Vehicle Detection, WDR 120dB			
Audio In / Out	Built-in Mic				-				IN: 1 line OUT: 1 line			
MicroSD Storage	Up to 256 GB				Up to 256 GB				Up to 256 GB			
Protection	IP67				IP67				IP67			
Power	12V DC, PoE				12V DC, PoE				12V DC, PoE			
Product QR Code												
Compatible Accessories	 LTB03-W Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB371 Pendant Mount 21.5\" (55cm)	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB371 Pendant Mount 21.5\" (55cm)	 LTB331 Pendant Mount 21.5\" (55cm)	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB371 Pendant Mount 21.5\" (55cm)	 LTB331 Pendant Mount 21.5\" (55cm)
	 LTB331 Pendant Mount 21.5\" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB307 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB307 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB307 Junction Box		

Dome IP Cameras						
SKU	CMIP7042W-28MA			CMIP7043NW-MZ		
						
Featuring	 					
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps			4 MP, 2560 x 1440 @ 20 fps		
Lens	2.8 mm, Fixed			2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F2.0			0.005 Lux @ F1.6		
Supplemental Lighting	IR LED up to 100 ft			Matrix IR LED up to 100 ft		
Special Features	WDR 120 dB			WDR 120 dB		
Audio In / Out	Built-in Mic			-		
MicroSD Storage	Up to 256 GB			Up to 256 GB		
Range of Motion	2-Axis			3-Axis		
Protection	IP67, IK10			IP67, IK10		
Power	12V DC, PoE			12V DC, PoE		
Product QR Code						
Compatible Accessories	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB701 Junction Box	 LTB342-135B Wall Mount with Junction Box	 LTB381 Pendant Mount 22" (56cm)
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount		 LTB379 Corner Mount

Bullet IP Cameras						
SKU	CMIP8042W-28MA		CMIP8043NW-MZ		CMIP8043W-MDZ	
						
Featuring						
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps		4 MP, 2560 x 1440 @ 20 fps		4MP, 2560 x 1440 @ 24 fps	
Lens	2.8 mm, Fixed		2.8 - 12 mm, VF, Motorized		2.8 - 12 mm, Motorized	
Min. Illumination	0.01 Lux @ F2.0		0.005 Lux @ F1.6		0.005 Lux @ F1.6, AGC ON 0 Lux with IR	
Smart Focus	-		Yes		-	
Supplemental Lighting	Matrix IR LED up to 100 ft		Matrix IR LED up to 165 ft		Matrix IR LED up to 165 ft	
Special Features	WDR 120 dB		WDR 120 dB		Human/Vehicle Detection, WDR 120dB	
Audio In / Out	Built-in Mic		-		IN: 1 line OUT: 1 line	
MicroSD Storage	Up to 256 GB		Up to 256 GB		Up to 256 GB	
Protection	IP67		IP67		IP67	
Power	12V DC, PoE		12V DC, PoE		12V DC, PoE	
Product QR Code						
Compatible Accessories	 LTB345 Junction Box		 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB801 Junction Box
				 LTB378 Pole Mount	 LTB379 Corner Mount	

*Direct-Search features are only available with compatible NVR (-D) models.


Indoor Wi-Fi IP Camera	
SKU	CMIP8942W-28SDA-WIFI
	
Featuring	
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps
Lens	2.8 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6
Compression	H.265+/H.265/H.264+/H.264
Supplemental Lighting	Matrix IR LED up to 33 ft
Special Features	VCA2.0, WDR 120dB, Direct-Search
Audio In / Out	Built-in Mic & Speaker
Built-in Wi-Fi	2.4 Ghz, 802.11b/g/n
MicroSD Storage	Up to 256 GB
Range of Motion	Pan 0° - 360°, Tilt 0° - 90°, Rotate 0° - 360°
Power	12V DC, PoE
Product QR Code	

Find Moments in Seconds with Semantic Search



DeepVision NVRs deliver intelligent performance, seamless integration, and unmatched search efficiency. Designed for professionals who demand speed, accuracy, and reliability in every frame.

First Semantic Search NVR

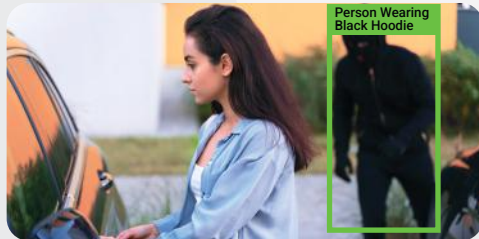

As the first NVRs to integrate Semantic Search technology, DeepVision sets a new benchmark in intelligent video analytics and operational efficiency.

Intuitive Experience




Eliminate the need to manually review hours of footage. With Semantic Search, you can find subjects in seconds — simply enter a few descriptive keywords and let the system do the work.

Large Multimodal Model







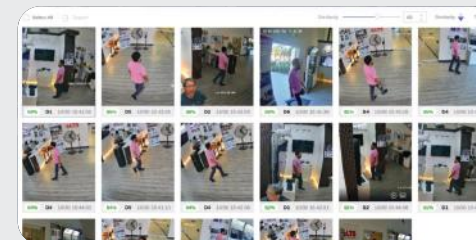















Powered by a large multimodal model, images and text are mapped into a shared vector space for seamless interaction. This enables advanced capabilities such as descriptive text-based searches to find the exact moment you're looking for.

Accurate Results



Semantic Search intelligently interprets your keywords to deliver the most relevant results. Adjust the similarity score to refine your search — higher scores return closely matched footage, while lower scores broaden the range of related results.

DeepVision NVR

SKU	LTN8608DV-P8	LTN8616DV-P16	LTN8932DV-P16
	  	  	  
Featuring	  	  	  
Video Input	8 Ch IP @ 96 Mbps	16 Ch IP @ 192 Mbps	32 Ch @ 384 Mbps
Video Output	HDMI up to 4K (3840 × 2160), VGA up to 1080p	HDMI up to 4K (3840 × 2160), VGA up to 1080p	HDMI1 up to 4K (3840 × 2160), HDMI2 up to 1080p, VGA up to 1080p
Max. Recording Resolution	up to 32 MP	up to 32 MP	up to 32 MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264 / MPEG4	H.265+ / H.265 / H.264+ / H.264 / MPEG4	H.265+ / H.265 / H.264+ / H.264 / MPEG4
Decoding Capability	Enable AI by NVR: 20-ch @1080p (30 fps) Disable AI by NVR: 32-ch @1080p (30 fps)	Enable AI by NVR: 20-ch @1080p (30 fps) Disable AI by NVR: 32-ch @1080p (30 fps)	Enable AI by NVR: 20-ch @ 1080p (30 fps) Disable AI by NVR: 32-ch @ 1080p (30 fps)
Special Features	DeepVision, MD2.0, Facial Recognition, Direct-Search	DeepVision, MD2.0, Facial Recognition, Direct-Search	DeepVision, MD2.0, Facial Recognition, Direct-Search
Audio In / Out	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA
Alarm Channels (In / Out)	4/1	4/1	16/9
Built-in PoE	8 Ch	16 Ch	16 Ch
Bandwidth, Connector	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps
Storage	2 x SATA up to 20TB each	2 x SATA up to 20TB each	4 x SATA up to 20TB each
POSs Supported	8 (TCP)	8 (TCP)	8 (TCP)
Hot Swap HDD	-	-	-
Backup	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	15.12" × 12.48" × 2.03"	15.12" × 12.48" × 2.03"	17.32" × 15.39" × 2.81"
Product QR Code			

*Please note Facial Recognition, Human / Vehicle Detection, and Direct-Search cannot be used simultaneously on compatible NVR and requires compatible AI Color 24/7 or Color 24/7 Cameras.


Instant Suspect Tracking at the Click of a Button



Direct-Search


With the new direct-search software, track targets accurately and quickly. The NVR reads the metadata pulled from the cameras and locates similar subjects within the search results, making it easy to find your subject of interest.

Track Your Suspects Easily

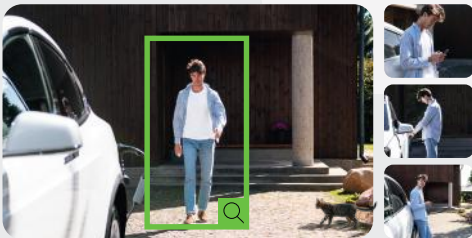

Say goodbye to manually digging through footage to find your perpetrator. Use Direct-Search to select a target in a given frame and expand the search through all the footage for similar subjects in minutes.

Vehicle Tracking

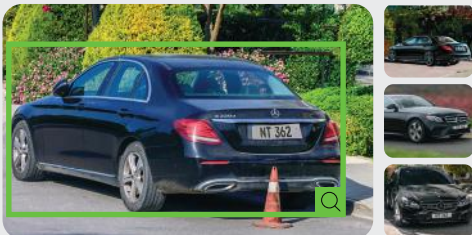

This software works with your camera system to help track vehicles entering your property.

Your Gatekeeper Against Unauthorized Access



Facial Recognition

The NVRs pull data from the AI Color 24/7 Cameras to alert you when unauthorized visitors are onsite. This technology is perfect for ensuring the safety of your home, property, and business.

Note: These two features cannot work simultaneously.

Screen Your Visitors



The facial recognition feature alerts you based on the database of allowed and blocked lists of individuals. For example, the system will notify you when VIPs on the permitted list enter the premises.


















Enhanced Monitoring Across Every Channel



The NVR leverages facial recognition technology across multiple channels to instantly alert you to security threats, such as individuals on a blocked list. This streamlined approach reduces costs by eliminating the need for real-time monitoring of each channel individually.

















Note: Requires compatible camera models

Enterprise Level NVR

SKU	LTN8916D-N LTN8916D-P16N	LTN8932D-N LTN8932D-P16N	LTN8964-RN	LTN07128D-R16	LTN07256D-R16	LTN07256-R16(L)
				 NEW	 NEW	
Featuring						
Video Input	16 Ch IP @ 160 Mbps	32 Ch IP @ 256 Mbps	64 Ch IP @ 400 Mbps	128 CH @ 1280 Mbps	256 CH @ 1280 Mbps	256 Ch IP @ 768 Mbps
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 4K (3840 x 2160), CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320) / VGA1 up to 1080p, HDMI2 up to 4K (3840 x 2160) / VGA2 up to 1080p, CVBS up to 704 x 480	Default Mode: HDMI 1 / VGA 1 / HDMI 2 / VGA 2 / HDMI 3 / HDMI 4 up to 1080p; There are two simultaneous and two independent output modes available in total.	Default Mode: HDMI 1 / VGA 1 / HDMI 2 / VGA 2 / HDMI 3 / HDMI 4 up to 1080p There are two simultaneous and two independent output modes available in total.	HDMI1 up to 4K / VGA up to 1080p, HDMI2 up to 4K
Max. Recording Resolution	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	up to 32 MP	Up to 12 MP
Decoding Format	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264/MPEG4
Decoding Capability	VCA by NVR on: 10 Ch @ 4MP VCA by NVR off: 15 Ch @ 4MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p	8 Ch @ 8 MP / 16 Ch @ 4 MP	2-ch @ 32 MP (30 fps) / 2-ch @ 24 MP (30fps) / 4-ch @ 16 MP (30fps) / 8-ch @ 8 MP (30fps) / 16-ch @ 4 MP (30fps) / 32-ch@2 MP (30fps)	2-ch@32 MP (30 fps)/2-ch@24 MP (30fps)/4-ch@16 MP (30fps)/8-ch@8 MP (30fps)/16-ch@4 MP (30fps)/32-ch@2 MP (30fps)	20CH @ 1080P
Special Features	Direct-Search, Facial Recognition	Direct-Search, Facial Recognition	RAID	MD2.0, Direct-Search, Facial Recognition	MD2.0, Facial Recognition, Direct-Search	RAID
Audio In / Out	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 2 lines RCA	2-ch RCA	2-ch RCA	IN: 1 line OUT: 1 line RCA
Alarm Channels (In / Out)	16/9	16/9	16/9	32/16	32/16	16 / 8
Built-in PoE	-/16Ch	-/16 Ch	-	-	-	-
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000/2500 Mbps	10/100/1000/2500 Mbps	10M/100M/1000M, 4 x RJ45
Storage	4 x SATA up to 16 TB each, eSATA, NAS, IP SAN	4 x SATA up to 16 TB each, eSATA, NAS, IP SAN	8 x SATA up to 16 TB each, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 x SATA up to 20 TB each	16 x SATA up to 20 TB each	16 x SATA up to 10 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10
POSs Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	-	-	RS-232
Hot Swap HDD	-	-	Yes	-	-	Yes
Backup	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 4 x USB 3.0	2 x USB 2.0, 4 x USB 3.0	2 x USB 2.0, 2 x USB 3.0
Dimensions (W x D x H)	17.3" x 15.4" x 3.0"	17.3" x 15.4" x 3.0"	17.5" x 18.3" x 3.6"	17.4" x 19.5" x 5.7"	17.4" x 19.5" x 5.7"	17.5" x 19.4" x 5.7"
Product QR Code						

*Please note Facial Recognition, Human / Vehicle Detection, and Direct-Search cannot be used simultaneously on compatible NVR and requires compatible AI Color 24/7 or Color 24/7 Cameras.

Professional Level NVR

SKU	LTN8704QN-P4	LTN8708QN-P8	LTN8708D-P8N	LTN8716D-P16N	LTN8608D-P8N	LTN8616D-P16N
						
Featuring						
Video Input	4 Ch IP @ 40 Mbps	8 Ch IP @ 80 Mbps	8 Ch IP @ 80 Mbps	16 Ch IP @ 160 Mbps	8 Ch IP @ 80 Mbps	16 Ch IP @ 160 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480
Max. Recording Resolution	Up to 4K, 8 MP (3840 x 2160)	Up to 4K, 8 MP (3840 x 2160)	Up to 12 MP	Up to 12 MP	Up to 32 MP	Up to 32 MP
Decoding Format	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Decoding Capability	1 Ch @ 8 MP / 2 Ch @ 4 MP	1 Ch @ 8 MP / 2 Ch @ 4 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	VCA by NVR on: 5 Ch @ 8MP VCA by NVR off: 7 Ch @ 8MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p
Special Features	-	-	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search
Audio In / Out	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA
Alarm Channels (In / Out)	-	-	4/1	4/1	4/1	4/1
Built-in PoE	4 Ch	8 Ch	8 Ch	16 Ch	8 Ch	16 Ch
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 16 TB each, NAS, IP SAN	2 x SATA up to 16 TB each, NAS, IP SAN
POSS Supported	-	-	-	-	4 (TCP)	4 (TCP)
Backup	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4" x 9.4" x 1.9"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.5" x 2.0"	15.2" x 12.5" x 2.0"
Product QR Code						

*Please note Facial Recognition, Human / Vehicle Detection, and Direct-Search cannot be used simultaneously on compatible NVR and requires compatible AI Color 24/7 or Color 24/7 Cameras.

Invest in Care, Skip the Repair



With powerful strobe lights, and two-way audio, TVI cameras are proactive against break-ins, significantly minimizing the need for costly property repairs. TVI cameras require compatible DVR models for MD 2.0 Human/Vehicle Detection.

Active Deterrence



This camera flashes red and blue strobe lights to deter intruders once they enter the detection zone proactively.

Two-Way Audio



If you encounter loiterers or personnel, you can use the two-way speakers to communicate and discourage access.

180° Coverage





































In addition to the strobe lights, these cameras have 180° coverage to monitor every angle—because total awareness means total protection.

VCA with Human & Vehicle Detection







































When paired with compatible DVRs, our cameras deliver enhanced detection accuracy—effectively distinguishing between relevant and irrelevant motion to minimize false alarms.

Color 24/7 HD-TVI Cameras

SKU	CMHT1722NW-28CF				CMHT1752W-28CF				CMHT1782W-28CF				CMHT3C5PW-28L	
									<div>4K</div> 				 <div>NEW</div>	
Featuring	<div>COLOR 24/7</div>				<div>COLOR 24/7</div>				<div>COLOR 24/7</div>				<div>COLOR 24/7</div> <div></div> <div></div> <div></div>	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps				5 MP, 2560 x 1944 @ 20 fps				8 MP, 3840 x 2160 @ 15 fps				5 MP, 3328 x 1504 @ 20 fps	
Lens	2.8 mm, Fixed				2.8 mm, Fixed				2.8 mm, Fixed				2 x 2.8 mm, Fixed	
Min. Illumination	0.0005 Lux @ F1.0				0.0005 Lux @ F1.0				0.0005 Lux @ F1.0				0.0005 Lux @ F 1.0, AGC ON, 0 Lux with suppl. light	
Supplemental Lighting	White LEDs up to 131 ft				White LEDs up to 65 ft				White LEDs up to 130 ft				IR and White light up to 131 ft	
Special Features	Color 24/7				Color 24/7				Color 24/7				Color 24/7, Hybrid Illumination, Active Deterrence with Red & Blue Strobe Light & Siren	
WDR	WDR 130 dB				WDR 130 dB				WDR 130 dB				WDR 130 dB	
Output	TVI / AHD / CVI / CVBS Switchable				TVI / AHD / CVI / CVBS Switchable				TVI				TVI	
Audio In/Out	-				-				-				Built-in Mic	
Protection	IP67				IP67				IP67				IP67	
Power	12V DC				12V DC				12V DC				12V DC	
Product QR Code														
Compatible Accessories														
														

*Please note CMHT3C5PW-28L only works with LTD85xx Series DVR models.



















Color 24/7 HD-TVI Cameras			Turret Fixed Lens HD-TVI Cameras									
SKU	CMHR9222NW-28CFN	CMHR9252W-28CFN	CMHT2122-28LF	CMHT1722-28LS	CMHT1722WE-28F							
				 								
Featuring				   								
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps							
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed							
Min. Illumination	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.02 Lux @ F2.2	0.01 Lux @ F1.6	0.003 Lux @ F1.2							
Supplemental Lighting	White LEDs up to 130 ft	White LEDs up to 130 ft	IR/White Light up to 65 ft	IR/White Light up to 130 ft	Matrix IR up to 197 ft							
Special Features	Color 24/7	Color 24/7	Hybrid Illumination	Hybrid Illumination, Active Deterrence with Red & Blue Strobe Light & Siren	-							
WDR	WDR 130 dB	WDR 120 dB	DWDR	DWDR	WDR 130 dB							
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI	TVI / AHD / CVI / CVBS Switchable							
Audio In / Out	-	-	-	Built-in Mic & Speaker	-							
Protection	IP67	IP67	IP67	IP67	IP67							
Power	12V DC	12V DC	12V DC	12V DC	12V DC							
Product QR Code												
Compatible Accessories	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB03-W Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB03-W Junction Box
	 LTB345 Junction Box		 LTB345 Junction Box		 LTB345 Junction Box		 LTB342-110T Wall Mount		 LTB342-JBOX Junction Box for Wall Mount LTB301		 LTB307 Junction Box	

*Please note CMHT1722-28LS only works with compatible DVR models.













Turret Fixed Lens HD-TVI Cameras

SKU	CMHT2152-28LFA		CMHT1752WE-28F				CMHT1782-28LF				CMHT1752-28LS			
											 			
Featuring	 										   			
Max. Resolution	5 MP, 2960 × 1665 @ 20 fps		5 MP, 2560 x 1944 @ 20 fps				8 MP, 3840 x 2160 @ 15 fps				5MP, 2960x1665 @ 25 fps			
Lens	2.8 mm, Fixed		2.8 mm, Fixed				2.8 mm				2.8mm, Fixed			
Min. Illumination	0.01 Lux @ F1.2		0.003 Lux @ F1.2				0.01 Lux @ F1.6				0.01 Lux @ F1.6			
Supplemental Lighting	IR up to 100 ft, White Light up to 66 ft		Matrix IR up to 200 ft				IR up to 130 ft, White Light up to 66 ft				IR/White Light up to 130 ft			
Special Features	Hybrid Illumination		-				Hybrid Illumination				Hybrid Illumination, Active Deterrence with Red & Blue Strobe Light and Siren			
WDR	DWDR		WDR 130 dB				DWDR				DWDR			
Output	TVI / AHD / CVI / CVBS Switchable		TVI / AHD / CVI / CVBS Switchable				TVI / AHD / CVI / CVBS Switchable				TVI			
Audio In / Out	Built-in Mic		-				-				Built-in Mic & Speaker			
Protection	IP67		IP67				IP67				IP67			
Power	12V DC		12V DC				12V DC				12V DC			
Product QR Code														
Compatible Accessories	 LTB345 Junction Box	 LTB342-110T Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount
		 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5\"	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5\"	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5\"	 LTB378 Pole Mount	 LTB379 Corner Mount		


Turret Vari-focal Lens HD-TVI Cameras	
SKU	CMHT1953-ZF
	
Featuring	
Max. Resolution	5 MP, 2560 x 1944 @ 20 fps
Lens	2.7 - 13.5 mm, Motorized
Min. Illumination	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 130 ft
Special Features	-
WDR	DWDR
Output	TVI / AHD / CVI / CVBS Switchable
Protection	IP67
Power	12V DC
Product QR Code	
Compatible Accessories	<div>  <p>LTB307 Junction Box (White)</p> </div> <div>  <p>LTB301 Wall Mount</p> </div>
	<div>  <p>LTB342-JBOX Junction Box for Wall Mount</p> </div> <div>  <p>LTB378 Pole Mount</p> </div> <div>  <p>LTB379 Corner Mount</p> </div>



















Dome Fixed Lens HD-TVI Cameras				
SKU	CMHD7322WE-28F	CMHD7352N-28F	CMHD7352WE-28F	CMHD7382-28F
				
Featuring				
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 100 ft	Matrix IR up to 65 ft	Matrix IR up to 100 ft	Matrix IR up to 100 ft
Special Features	-	-	-	-
WDR	WDR 130 dB	DWDR	WDR 130 dB	DWDR
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI	TVI / AHD / CVI / CVBS Switchable
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis
Power	12V DC	12V DC	12V DC	12V DC
Product QR Code				
Compatible Accessories	Compatible with All Cameras Above			
	 <p>LTB347 Junction Box (White)</p>	 <p>LTB349 Angled Ceiling Mount (15°)</p>	 <p>LTB348 Wall Mount (White)</p>	 <p>LTB376 Pendant Mount 22" (56cm)</p>
	 <p>LTB342-110 Wall Mount</p>	 <p>LTB378 Pole Mount</p>	 <p>LTB379 Corner Mount</p>	

Dome Vari-focal Lens HD-TVI Cameras

SKU	CMHD3523DWE-ZF	CMHD3453D-ZFN
	 Junction Box Included	
Featuring		
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	2.7 - 13.5 mm, Motorized	2.7 - 13.5 mm, Motorized
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 200 ft	Matrix IR up to 130 ft
Special Features	-	-
WDR	True WDR 130 dB	DWDR
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable
Protection	IP67, IK10	IP67, IK10
Range of Motion	3-Axis	3-Axis
Power	12V DC, 24V AC	12V DC, 24V AC
Product QR Code		
Compatible Accessories	Compatible with All Cameras Above	
	 LTB342-140 Wall Mount for CMHD-3523DWE	 LTB342-JBOX Junction Box for Wall Mount LTB342-140
		 LTB340 In-Ceiling Mount for CMHD3523DWE
	 LTB453 Junction Box for CMHD3453D-ZFN	 LTB378 Pole Mount
		 LTB379 Corner Mount

Bullet Fixed Lens HD-TVI Cameras



















SKU	CMHR6422WE-28F	CMHR6452N-28F
		
Featuring		
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 100 ft	Matrix IR up to 65 ft
Special Features	-	-
WDR	WDR 130 dB	DWDR
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable
Protection	IP67	IP67
Power	12V DC	12V DC
Product QR Code		
Compatible Accessories	 LTB345 Junction Box	 LTB345 Junction Box

Bullet Fixed Lens HD-TVI Cameras					Bullet Vari-focal Lens HD-TVI	
SKU	CMHR9222WE-28FN	CMHR9252N-28FN	CMHR9252WE-28F	CMHR9282-28F	CMHR9623DWE-ZF	CMHR9653D-ZFN
			 Junction Box Included	 Junction Box Included	 Junction Box Included	
Featuring						
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.7 - 13.5 mm, Motorized	2.7 - 13.5 mm, Motorized
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 200 ft	Matrix IR up to 130 ft	Matrix IR up to 200 ft	Matrix IR up to 200 ft	Matrix IR up to 263 ft	Matrix IR up to 130 ft
Special Features	-	-	-	-	-	-
WDR	WDR 130 dB	DWDR	WDR 130 dB	DWDR	WDR 130 dB	DWDR
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable
Protection	IP67	IP67	IP67	IP67	IP67	IP67
Power	12V DC	12V DC	12V DC	12V DC	12V DC, 24V AC	12V DC, 24V AC
Product QR Code						
Compatible Accessory	 LTB345 Junction Box	 LTB345 Junction Box	 LTB345 Junction Box	 LTB345 Junction Box	 LTB801 Junction Box	 LTB801 Junction Box

Enterprise Level DVR

SKU	LTD8416M-ST(S)	LTD8432M-EA(S)	LTD8432M-ST(S)
	 		 
Featuring			
Analog Video Input	16 Ch (TVI / AHD / CVI / CVBS) up to 8 MP	32 Ch (HD-TVI / AHD / CVI / CVBS) up to 4 MP	32 Ch (HD-TVI / AHD / CVI / CVBS) up to 8 MP
Analog Record Rate	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	4 MP Lite @ 15 fps / 1080p @ 15 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 3 MP @ 18 fps
IPC Input	18 Ch, up to 12 MP, adjustable up to 34 Ch	16 Ch up to 6 MP, adjustable up to 48 Ch	32 Ch up to 12 MP, adjustable up to 64 Ch
Total Bandwidth	In: 160 Mbps; Out: 160 Mbps	In: 200 Mbps; Out: 160 Mbps	In: 320 Mbps; Out: 256 Mbps
Decoding Format	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 1080p, CVBS	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)
Playback Channel	16 Ch	16 Ch	16 Ch
Audio In / Out	IN: 4 lines OUT: 2 lines RCA	IN: 4 lines OUT: 1 line RCA	IN: 4 lines OUT: 1 line RCA
Alarm Channels (In / Out)	16/4	16/4	16/4
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	4 x SATA up to 12 TB each, NAS, IP SAN	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA
USB	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
PTZ Control	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard
POSs Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions (W x D x H)	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"
Product QR Code			

Professional Level DVR

SKU	LTD8304D-ET	LTD8308D-ETC	LTD8316D-ET	LTD8504D-ST	LTD8508D-STC	LTD8516D-ST
	 NEW	 NEW	 NEW	 NEW	 NEW	 NEW
Featuring						
Video Input	4 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP	8 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP	16 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP	4 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP	8 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP	16 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP
Analog Record Rate	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	1st ch. up to 8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps
IPC Input	Standard Mode: 1 channel (up to 5) Enhanced IP Mode: 2 channels (up to 6) @ up to 4 Mbps each. Up to 6 MP	Standard Mode: 2 channels (up to 10) Enhanced IP Mode: 4 channels (up to 12) @ up to 4 Mbps each. Up to 6 MP	8 channels (up to 24) @ up to 4 Mbps each, up to 6 MP	Standard Mode: 2 channels (up to 6) Enhanced IP Mode: 4 channels (up to 8) @ up to 4 Mbps each. Up to 8 MP	8 channels (up to 16) @ up to 4 Mbps each, up to 8 MP	16 channels (up to 32) @ up to 4 Mbps each, up to 8 MP
Total Bandwidth	72 Mbps	96 Mbps	128 Mbps	96 Mbps	128 Mbps	128 Mbps
Video Output	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	HDMI (4k) / VGA up to 1080P	HDMI (2k) / VGA up to 1080P	HDMI (4k) / VGA up to 1080P	HDMI (4k) / VGA up to 1080P
Decoding Format	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Deep Learning Support	Human / Vehicle Detection, or 2 ch. of Human/Vehicle Detection VCA, or 1 ch. Facial Recognition, or 2 ch. Direct-Search	Human / Vehicle Detection, or 4 ch. Human/Vehicle Detection VCA, or 2 ch. Facial Recognition, or 4 ch. Direct-Search	Human / Vehicle Detection, or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search	Human / Vehicle Detection, or 4 ch. Human/Vehicle Detection VCA, or 2 ch. Facial Recognition, or 4 ch. Direct-Search	Human / Vehicle Detection, or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search	MD, 2.0 or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search
Playback Channel	4 Ch	8 Ch	16 Ch	4 Ch	8 Ch	16 Ch
Audio In / Out	IN: 1 line OUT: 1 line RCA 4, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 8, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 16, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 4, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 8, coaxial cable (input)	IN: 4 line OUT: 1 line RCA 16, coaxial cable (input)
Alarm Channels (In / Out)	-	-	-	-	-	-
Network Interface	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 10 TB	1 x SATA up to 10 TB	2 x SATA up to 12 TB each	1 x SATA up to 10 TB	1 x SATA up to 12 TB	2 x SATA up to 12 TB each, NAS, IP SAN
PTZ Control	RS485	RS485	RS485	RS485	RS485	RS485
USB	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.6 x 9.3 x 1.9"	12.4 x 9.5 x 1.9"	15.1 x 12.5 x 2.0"	12.4 x 9.5 x 1.8"	12.4 x 9.5 x 1.8"	15 x 12.6 x 1.9"
Product QR Code						



Download LTS Connect App on



Apple Store



Google Play



Download X-VMS App on



Apple Store




Google Play

Intercom and Access Control











Scalable Entrance Security Solutions

IP Intercom Outdoor Station

LTH-303M-WIFI	LTH-302M-PS	LTH-401M-WIFI	LTH-401M-PS	LTK3411MF
 <p>Door Station with WDR 2 MP IPC</p> <ul style="list-style-type: none"> • Compact 4.7" x 2.2" x 0.8" • MIFARE Reader Calling Button • Single Office Application, Call App Directly • PoE or TCP / IP with 12V DC, IP65 	 <p>Protective Shield</p> <ul style="list-style-type: none"> • 5.90" x 3.13" x 1.91" • Polycarbonate • Compatible with LTH-301M-WIFI, LTH302M-WIFI and LTH303M-WIFI • Surface Mount 	 <p>IP Door Station with Contact List</p> <ul style="list-style-type: none"> • 7.16" x 3.33" x 1.01" • Contact List Function • Supports up to 500 Contacts • 4" Touchscreen • Large Physical Call Button • Face, Card, Key fob, and Code Entry • PoE or 12V DC with Wi-Fi • IP65, IK8 Vandal-resistant 	 <p>Protective Shield</p> <ul style="list-style-type: none"> • 7.43" x 3.82" x 1.93" • Electro-Galvanized Steel Sheets • Compatible with LTH-401M-WIFI • Surface Mount 	 <p>4" Touchscreen Door Station</p> <ul style="list-style-type: none"> • 6.79" x 3.27" x 0.89" • Facial, Card, QR Code, and PIN • For Single Office: 1 Click Call App • For Multi-Tenant: Supports up to 500 Apartment Units • Add Indoor Station for App Access • IP65 • TCP / IP, 12V DC • Add LTK-AQE30E for PoE • Secure module LTH-SM1 via RS-485 

IP Intercom Indoor Station

Management Software Options

LTH-D311GY-WIFI	LTH-D311-DESK	NVMS V3 PC Software + LTS Connect App	X-VMS VMS Windows Software + X-VMS App	LTK-E100ME
 <p>IP Video Indoor Station</p> <ul style="list-style-type: none"> • 7" Touch Screen • New Design • NVMS V3 PC • Allows App Access for Door Stations • PoE, 12V DC, Wi-Fi • Up to 17 per Office 	 <p>Desk Stand</p> <ul style="list-style-type: none"> • Designed for LTH-D311GY-WIFI 	 <p>Manage Surveillance, Access Control and Intercom</p> <ul style="list-style-type: none"> • Only 1 PC for Access Control Purposes • LTS Connect App Supports Single Door Controllers and Intercom • Answer and Unlock Doors via App • Up to 256 Video and 50 Door Channels • Time Attendance, E-Map 	 <p>VMS for LTS Surveillance, Access Control and Intercom</p> <ul style="list-style-type: none"> • Supports Multiple Users from Different Computers and Smartphones • Controls Multi-Door and Single Door Controllers and Intercom • Project-based Pricing • Web for Config, Software for Operation 	 <p>LTS MIFARE USB Issuer</p> <ul style="list-style-type: none"> • Supports Both NVMS and X-VMS • Easy Enrolling Cards at Client PC • UL Listed 

Controllers and Readers |




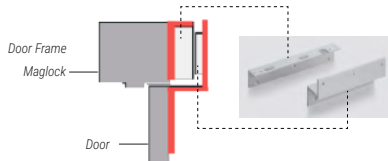
Multi-Door Controller

Card Readers for LTS Controllers

MIFARE Credentials

LTK2802 LTK2804	LTK1107M	LTK1107MK	LTK1108M	LTK1108MK	LTKC1356M	LTKF1356M	LTKF1356M-T
	 	 	 	 	 	 	 
<p>LTS 2 Door Controller</p> <ul style="list-style-type: none"> • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 	<p>LTS Slim Reader</p> <ul style="list-style-type: none"> • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad 		<p>LTS Single Gang Reader</p> <ul style="list-style-type: none"> • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad 		<p>LTS MIFARE Card</p> <ul style="list-style-type: none"> • 13.56 MIFARE Classic • 8- and 10-Digit # Printed 	<p>LTS MIFARE Key Fob</p>	<p>LTS MIFARE Thick Key Fob</p>
<p>LTS 4 Door Controller</p> <ul style="list-style-type: none"> • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 							


Alarm Controls and Securitron Maglocks and Accessories

LTK-600S	LTK-1200S	LTK-600WP	LTK-1200WP	LTK-600D	LTK-1200D	LTK-AM3370	LTK-AM6370
							
<ul style="list-style-type: none"> Alarm Controls Maglock 600lb / 1,200lb Holding Force, UL294 and UL10C Add AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> Alarm Controls Waterproof Maglock 600lb / 1,200lb, Swinging or Sliding Gate Add AM3370 / 6370 as Gate Bracket 		<ul style="list-style-type: none"> Alarm Controls Double Door Maglock 600lb / 1,200lb Holding Force, UL294 and UL10C Add AM3375 / 6375 or 2 x AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> Alarm Controls LZ Bracket For Mounting Maglocks onto Inward Swinging Doors AM3370 for 600 Series and AM6370 for 1200 Series 	

Add Two Means of Egress to Your Maglock Installation

LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-NTS-1	LTK-TS-14	LTK-TS-60	LTK-SREX-100	LTK-XMS	LTK-REB-1
								
<ul style="list-style-type: none"> Alarm Controls Green Push Button 2" sq. Illuminated "Push to Exit," UL294 Listed TS-2 is SPDT; TS-2-2 is DPDT; TS-2T is SPDT with 2 - 4 sec. Timer 			<ul style="list-style-type: none"> Alarm Controls No Touch Sensor with 1 - 3 sec. Timer Single Gang Stainless Steel Wall Plate, SPDT 	<ul style="list-style-type: none"> Alarm Controls Pushbutton with 2 - 60 sec. Pneumatic Timer, UL294 Listed 1.5" Large Green / 2.5" Extra Large Red Mushroom Button "Push To Exit", SPDT 		<ul style="list-style-type: none"> Alarm Controls Focused RTE Motion Sensor DPDT, UL294 Listed 	<ul style="list-style-type: none"> Securitron Adjustable Pattern RTE Motion Sensor NC only, UL294 Listed 	<ul style="list-style-type: none"> Alarm Controls Pushbar & Door Loop, DPDT 34.5" Request to Exit Pushbar, 18" Door Loop Included

Get a Certified Power Supply that Can Integrate with Fire Alarm Systems




LTK-AQD4-4C1R1	LTK-AQD6-8C8R2	LTK-AQL6-B100R8E1
		
12 or 24V DC 4A with 4 PTC Output	12 or 24V DC 6A with 8 PTC Output	12 and 24V DC 6A with 8 Fuse Output
<ul style="list-style-type: none"> Securitron AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered 		<ul style="list-style-type: none"> UL294, UL603, ULC-S318, ULC-S533 Listed; RoHS Compliant and REACH Compliant


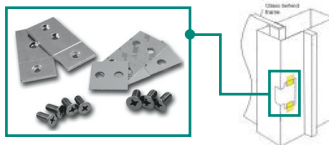

***All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.**

***Batteries are NOT included for AQD Power Supplies.**

Select Electrical Strikes According to Existing Door Hardware

Electrical Strike for Cylindrical Latch

LTK-5000C-630	LTK-8000C-630	LTK-AES-300-12	LTK-AES-300-24
			
<ul style="list-style-type: none"> • HES 5000 Strike with 501 and 501A Faceplates • ANSI Metal Jambos or Aluminum Frames • Dual Voltage 12V DC / 24V AC, UL1034, UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • HES 8000 Strike with 801 and 801A Faceplates • Easy Installation with No Cutting on ANSI Frames • Dual Voltage 12V DC / 24V DC, UL1034, UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • AES-300 Strike with All Faceplates Included • Ultra Compact for Minimum Cutting on Wood Frames • 300-12 12V DC/AC; 300-24 24V DC/AC, UL1034 Listed 	

For Mortise Latch:	Mounting Tabs for Storefront	Change Deadbolt to Mortise Latch on Storefront	
LTK-1500C-630	LTK-152	LTK-4900-25-628	LTK-4900-26-628
			
<ul style="list-style-type: none">• HES 1500 Strike with 1J, 1K, 1KD and 1KM Faceplates• Stainless Steel Construction with 10-Year No-Fault Warranty• Dual Voltage 12V DC / 24V DC, UL294, UL10C 3 Hours• Satin stainless steel	<ul style="list-style-type: none">• HES 152: Universal Mounting Tabs• Mount Inside Hollow Metal and Aluminum Jambos• Compatible with 5000, 8000, 7400, 1500, 1600 and More	<ul style="list-style-type: none">• Adams Rite Mortise Latch, Clear Anodized Finish• Drop-in Replacement for Many Deadbolt and Hook Bolt Locks• 31" / 32" Backset, -25 LH or RHR, -26 RH or LHR• Satin stainless steel	

For RIM Exit Devices (Push Bar):

LTK-9400-630	LTK-9600-630	LTK-9500-630
		
<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed
<ul style="list-style-type: none"> • For 1/2" Pullman Latch • UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294, UL10C 3 Hours Fire Rated • Satin stainless steel

*All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS. Please call sales for other HES finish colored models.



































airMAX[®]



SERVICE CODE :
UBNT-SERVICE

Accessories

*airMAX® setup service available for \$25 per unit




airMAX® Wireless			UniFi® Wifi		
LTU 5GHz					
	UBNT-LTU-LR 5 GHz PtMP LTU Long-Range Client, functions in a PtMP environment with the LTU-Rocket as the BaseStation.			UBNT-U7-PRO Ceiling-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support for interference-free WiFi in demanding, large-scale environments.	
	UBNT-LTU-PRO 5 GHz PtMP LTU Client with advanced RF performance, functions in a PtMP environment with the LTU-Rocket as the BaseStation.			UBNT-U7-PRO-MAX NEW Ceiling-mounted WiFi 7 AP with 8 spatial streams, 6 GHz support, and a dedicated spectral scanning engine for interference-free WiFi in demanding, large-scale environments.	
	UBNT-LTU-ROCKET 5 GHz PtMP LTU BaseStation Radio, functions in a PtMP environment using the LTU Pro, LTU Lite, or LTU LR as Clients.			UBNT-U7-OUTDOOR NEW All-weather WiFi 7 AP with 4 spatial streams, an integrated directional super antenna, and versatile mounting options.	
airMAX 5GHz				UBNT-U7-PRO-WALL NEW Wall-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support tailored for home builders with seamless installation options.	
	UBNT-LOC05AC Compact, UISP-ready WiFi radio sporting a classic NanoStation design and an updated airMAX AC chipset.			UBNT-U7-LITE NEW Wall-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support tailored for home builders with seamless installation options.	
	UBNT-LBE-5AC-GEN2 Ultra-lightweight design with proprietary airMAX ac chipset and dedicated management WiFi for easy UISP mobile app support and fast setup.			UBNT-U7-IW NEW Wall-mounted WiFi 7 AP with 4 spatial streams and an integrated 2.5 GbE PoE switch designed for hospitality environments. Note: PoE+ input required for single-port PoE output.	
	UBNT-LOCOM5 Low-cost and efficient broadband 5GHz CPE.			UBNT-U6+ Compact, ceiling-mounted WiFi 6 AP with 4 spatial streams that improves upon the U6 Lite with higher performance and dual-band WiFi 6 support. Ideal for small and medium-sized businesses.	
	UBNT-NBE-M5-16 High-performance 5GHz, 16 dBi bridge.			UBNT-U6-PRO Ceiling-mounted WiFi 6 AP with 6 spatial streams designed for large offices.	
Antennas and Accessories				UBNT-U6-MESH Sleek, indoor/outdoor WiFi 6 AP with 6 spatial streams designed for mesh applications.	
	UBNT-AMO-5G10 5 GHz, 10 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.			UBNT-ACB-ISP Low-cost home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	
	UBNT-AMO-5G13 5 GHz, 13 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.			UBNT-ACB-AC High-performance home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	
	UBNT-ETH-SP-G2 ESD protection for outdoor high-speed networks.				
	UBNT-UB-AM Universal mounting bracket for wall-mount flexibility.				

*All Ubiquiti products are available to order through LTS

UniFi® Cloud Gateways

	UBNT-UDM-PRO-MAX 10G Cloud Gateway with 200+ UniFi device / 2,000+ client support, 5 Gbps IPS routing, and redundant NVR storage.	
	UBNT-UDM-PRO 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support and 3.5 Gbps IPS routing.	
	UBNT-UDM-SE 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support, 3.5 Gbps IPS routing, and built-in PoE switching.	
	UBNT-UX Impressively compact UniFi Cloud Gateway and WiFi 6 access point that runs UniFi Network. Powers an entire network or simply meshes as an access point.	
	UBNT-UCG-MAX Compact 2.5G Cloud Gateway with 30+ UniFi device / 300+ client support, 2.3 Gbps IPS routing, and selectable NVR storage.	
	UBNT-UCG-ULTRA Compact Cloud Gateway with 30+ UniFi device / 300+ client support, 1 Gbps IPS routing, and multi-WAN load balancing.	









UniFi® CloudKeys Gateways

	UBNT-UXG-LITE A compact and powerful UniFi gateway with a full suite of advanced routing and security features.	
	UBNT-UXG-PRO Multi-WAN independent gateway designed to protect large-scale networks with a full suite of advanced routing and security features.	
	UBNT-UCK-G2-SSD Compact UniFi Console that connects directly to the Site Manager at https://unifi.ui.com/ for powerful, multi-application site management. Pre-installed 1TB SSD	NEW

UniFi® PoE Switching

  	<ul style="list-style-type: none">• UBNT-USW-ENTERPRISE-48-POE (720W)• UBNT-USW-ENTERPRISE-24-POE (400W)• UBNT-USW-ENTERPRISE-8-POE (120W) A 48 / 24 / 8-port, Layer 3 switch with 2.5 GbE PoE+ output.	
  	<ul style="list-style-type: none">• UBNT-USW-PRO-MAX-48-POE (720W)• UBNT-USW-PRO-MAX-24-POE (400W)• UBNT-USW-PRO-MAX-16-POE (180W) A 48 / 24 / 16-port, Layer 3 Etherlighting™ switch with 2.5 GbE and PoE++ output.	
  	<ul style="list-style-type: none">• UBNT-USW-PRO-48-POE (600W)• UBNT-USW-PRO-24-POE (400W)• UBNT-USW-PRO-8-POE (120W) A 48 / 24 / 8-port, Layer 3 switch capable of high-power PoE++ output.	
  	<ul style="list-style-type: none">• UBNT-USW-48-POE (195W)• UBNT-USW-24-POE (95W)• UBNT-USW-16-POE (42W) A 48 / 24 / 16-port, Layer 2 PoE switch with a silent, fanless cooling system.	
 	<ul style="list-style-type: none">• UBNT-USW-LITE-16-POE (45W)• UBNT-USW-LITE-8-POE (52W) A wall-mountable, 16 / 8-port, Layer 2 PoE switch with a fanless cooling system.	
	UBNT-USW-FLEX (46W) Flexible 5-port, Layer 2 PoE switch for indoor and outdoor use, that can be powered with PoE++.	
	UBNT-USW-FLEX-MINI A compact, 5-port, Layer 2 switch that can be powered with PoE or a 5V USB-C adapter.	
 	UBNT-USW-FLEX-UTILITY The Switch Flex Utility is an outdoor weatherproof enclosure designed for use with the Switch Flex.	













Managed PoE Switches














 NEW	<ul style="list-style-type: none">• 60 W, IEEE 802.3af/at• 4 x Gigabit PoE RJ45 ports• Up to 1,000 ft• 2 x Gigabit RJ45 port• Supports LTS Platinum Partner (LPP)	
POE-SWC402G 4-Port Cloud Managed Gigabit PoE Switch		
 NEW	<ul style="list-style-type: none">• 110 W, IEEE 802.3af/at• 8 x Gigabit PoE RJ45 ports• Up to 1,000 ft• 2 x Gigabit RJ45 port• Supports LTS Platinum Partner (LPP)	
POE-SWC802G 8-Port Cloud Managed Gigabit PoE Switch		
 NEW	<ul style="list-style-type: none">• 230 W, IEEE 802.3af/at• 16 x Gigabit PoE RJ45 ports• Up to 1,000 ft• 1 x Gigabit RJ45 port• 1 x Gigabit fiber optical port• Supports LTS Platinum Partner (LPP)	
POE-SWC1601G 16-Port Cloud Managed Gigabit PoE Switch		
 NEW	<ul style="list-style-type: none">• 370 W, IEEE 802.3af/at• 24 x Gigabit PoE RJ45 ports• Up to 1,000 ft• 1 x Gigabit RJ45 port• 1 x Gigabit fiber optical port• Supports LTS Platinum Partner (LPP)	
POE-SWC2401G 24-Port Cloud Managed Gigabit PoE Switch		













Wireless Bridges

	LTWB-5AC-12 12V DC Wireless Bridge (Up to 3 Miles)	
	LTWB-5AC-360 360° PoE Wireless Bridge receiver with antenna (Up to 1 mile)	















*All Ubiquiti products are available to order through LTS

Power Adapters			Power Supplies			Warning Signs		
PS120V0800	800mA, 12V DC		12V DC		Rating			LTSIGNB • 9"(W) x 11"(H)
PS120V1000	1000mA, 12V DC		PS120V5-D	• 4 Ports • 5 Amps	PTC			LTSIGNA • 11"(W) x 18"(H)
PS120V2000	2000mA, 12V DC		DV-AT1207M-D09	• 9 Ports • 7 Amps	PTC			
PS120V3000	3000mA, 12V DC		DV-AT1209A-D9P	• 9 Ports • 9 Amps	PTC			LTSACS-801 • Solar Power (No Battery Needed) • Actively Flashing LCD
TS5-6W	5000mA, 12V DC		DV-AT1212A-D18P	• 18 Ports • 12 Amps	PTC		Monitor Brackets	
PS240V1000	1000mA, 24V AC		DV-AT1220A-D18P	• 18 Ports • 20 Amps	PTC			LTMB1026 • For 10" - 26" Screen Size • Distance to Wall 35 - 390 mm • Max load: 10 kg
PS240V3000	3000mA, 24V AC		DV-RT1224A-D24	• 24 Ports • 24 Amps	PTC			LTMB1737 • For 17" - 37" Screen Size • Distance to Wall 35 - 380 mm • Max load: 30kg
DV-AT12015-D01	1500mA (Max), 24V AC to 12V DC		DV-RT1232A-D32	• 32 Ports • 32 Amps	PTC			LTMB2655 • For 26" - 55" Screen Size • Distance to Wall 7 mm • Max load: 50kg
Passive Video Balun Tranceivers			DV-AT1205A-D07	• 4 Ports • 5 Amps	PTC			LTMB3270 • For 32" - 70" Screen Size • Distance to Wall 70 - 390 mm • Max load: 75kg
	<ul style="list-style-type: none"> • 8 MP/4K Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720p / 960p / 1080p / 3 MP / 5 MP / 8 MP 		DV-AT1209A-D9	• 9 Ports • 9 Amps	Fuse			
LTAB4020NT			DV-AT1212A-D18	• 18 Ports • 12 Amps	Fuse			
			DV-AT1210A-D07 	• 9 Ports • 10 Amps	Fuse			
LTAB4030TP			DV-AT1210A-D10 	• 18 Ports • 10 Amps	Fuse			
DVR Lockboxes			DV-AT1215A-D10 	• 18 Ports • 18 Amps	Fuse			
	LT-DVRLB18-18-5		DV-AT1232A-D18	• 18 Ports • 32 Amps	Fuse			
	LT-DVRLB21-21-8		DV-AT1232A-D27	• 27 Port • 32 Amp	Fuse			
	LT-DVRLB21-24-8		24V AC		Rating			
	LTBHWB (Wall Mount Bracket)		DV-AC2408A-D07	• 9 Port • 8 Amp	PTC			
			DV-AC2412A-D10	• 18 Ports • 12 Amps	PTC			






Connectors		
	LTA1001	BNC Twist-On RG59 Male (20 pcs/pack)
	LTA1002	BNC Male to RCA Female (20 pcs/pack)
	LTA1003	BNC Female to RCA Male (20 pcs/pack)
	LTA1004	BNC Male to RCA Male (20 pcs/pack)
	LTA1005	BNC Coupler Female to Female (20 pcs/pack)
	LTA1006	BNC Compression for RG59 (20 pcs/pack)
	LTA1007	BNC Male Crimp-on (20 pcs/pack)
	LTA1013	BNC Male to 2 BNC Female (20 pcs/pack)
	LTA1014	X RJ45 8P8C Cat5e Crimp Connector
	LTA1016	X RJ45 8P8C Cat6 Crimp Connector
	LT-KY5E110	Enhanced Cat5e Keystone Jack
CAT5e Pre-Made Cables		
	LTAC2042 LTAC2041	<ul style="list-style-type: none">• Pre-made RJ45 CAT5e Cable• LTAC2042 - 50 ft• LTAC2041 - 100 ft
Tools		
	LTA-T203MS	<ul style="list-style-type: none">• Wire Stripper• Strip Wire (12 - 22 gauge) with One Pull of Trigger• Built-in Ruler Splicer with Auto Adjust

Control Cables			
	 LTAC1802G-CMR	<ul style="list-style-type: none">• 18AWG / 2 Conductor Access Control Wire• 1000 ft Stranded• 99.99% OFC• Access Control, Intercom, and Alarm• CMR Rated, UL Listed• Color: Gray	
	 LTAC1806G-CMR	<ul style="list-style-type: none">• 18AWG / 6 Conductor Control Wire• 500 ft Stranded• 99.99% OFC• CMR Rated• Shielded ETL• Color: Gray	
	 LTAC1822Y-CMR	<ul style="list-style-type: none">• 500 ft Stranded Control Cable• 99.99% OFC• 18/4 + 22/2 + 22/4 + 22/6 Combination Cable• Shielded 22/6• ETL Rated, CMR Rated• Color: Yellow	
Cables (HDMI, DC Power, X RJ45)			
	LTAC3005 LTAC3110 LTAC3125 LTAC3150	<ul style="list-style-type: none">• HDMI with Ethernet• 4.5 / 10 / 25 / 50 ft Cable• Hi-Speed 1080p / 3D, 100% Triple Shield 24K• Gold Plated with Nylon Jacket	
	LTAC3100 LTAC31120	<ul style="list-style-type: none">• 100 ft HDMI Cable• Hi-Speed 1080p with USB Booster 26AWG	
	LTA2003	<ul style="list-style-type: none">• Terminal Connector• 9 Terminal, DC & AC• Connector / Splitter	
	LTA2017 LTA2013	<ul style="list-style-type: none">• DC Power Connector• LTA2017 - Male• LTA2013 - Female (20 pcs/pack)	
	LTA2004 LTA2014	<ul style="list-style-type: none">• DC Power Adapter Cable• LTA2004 - Male• LTA2014 - Female (20 pcs/pack)	
	LTA2010 LTA2008	<ul style="list-style-type: none">• Male / Female Pigtail• LTA2010 - Male• LTA2008 - Female	

Cables (Coaxial, CAT5e and CAT6 Network)

	LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR		<ul style="list-style-type: none"> • 1,000 ft CAT5e 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black 	
	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR		<ul style="list-style-type: none"> • 1,000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black / Gray / Orange 	
	LTAC5100B-CMX LTAC6250B-CMX	 	<ul style="list-style-type: none"> • 1,000 ft CAT5e / CAT6 99.99% OFC • ETL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • Outdoor Rated, UV Resistance • Direct Burial • Color: Black 	
	LTAC6250W-CMP LTAC6250BL-CMP LTAC6250B-CMP		<ul style="list-style-type: none"> • 1,000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, TIA-568-C.2 • Fluke Tested • Plenum Rated, CMP • Color: White / Blue / Black 	
	LTAC2040 LTAC2046		<ul style="list-style-type: none"> • 1,000 ft CCA CAT5e / CAT6 • Commercial Grade Network Cable • Color: White / Blue / Black 	
	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B		<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • 18AWG CCA Cable 	
	LTAC2030 LTAC2032		<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper 	
	LTAC2030B-CMX LTAC2032B-CMX		<ul style="list-style-type: none"> • Siamese Coaxial Cable • Color: Black • Direct Burial • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper 	
	LTAC2060W / LTAC2060B LTAC2100W / LTAC2100B LTAC2125W / LTAC2125B		<ul style="list-style-type: none"> • Pre-made HD Siamese Cable with BNC and Power Connector • 60 ft / 100 ft / 125 ft • Color: White / Black 	

Cables (DC Power, VGA, Microphone)

	LTA2005	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 2 Male 	
	LTA2006	<ul style="list-style-type: none"> • DC Power Splitter • 1 Male to 2 Female 	
	LTA2011	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 4 Male 	
	LTA2018	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 8 Male 	
	LTA2001	<ul style="list-style-type: none"> • 12" Microphone with Power Cable • Microphone with Amplifier 	

Converters, Splitters, Extenders

	LTAH2100E	<ul style="list-style-type: none"> • USB RJ45 Extender • 2 x USB, USB A Female • Plug & Play • Cable Type: CAT5, 5E, 6, UTP • Extend Distance to 150 ft 	
	LTAH014LN	<ul style="list-style-type: none"> • 1 in / 4 out HDMI Splitter • Support HDMI 1.3 and 1080p • HDCP & 3D Support 	
	LTAH018L	<ul style="list-style-type: none"> • 1 in / 8 out HDMI Splitter • 8 Identical HDMI Outputs • Up to 225MHz • Support 3D 	
	LTAH3100E	<ul style="list-style-type: none"> • VGA / Audio X RJ45 Extender • Video Type: VGA • Supports 1920 x 1440 • 1 x Stereo Audio (R/L) • Extend Distance to 900 ft 	
	LTAH1070E	<ul style="list-style-type: none"> • HDMI Extender 1080p • Supports 1080p up to 165 ft • 5V DC/1A, Power Adapter included 	
	LTAH5300T	<ul style="list-style-type: none"> • HD-TVI Distributor • Input: 1 x HD-TVI • Output: 3 x HD-TVI 	



Western Digital.

UNSTOPPABLE PURSUIT

For a Safer Future

Celebrating
10 Years of
WD Purple®





Video Solutions for Security Professionals

Since 2009

100+ New Products
Released Annually

90K Customers
Served Annually

120+ Sales/Techs


- Free Security Solution Consultation
- Sales & tech support from 9am to 9pm ET

200,000+ sq ft
Warehouse Space

Global Supply Chain

First-class Service

- Well-Stocked Inventory
- Same Day Delivery
- New Technology Demos
- Shop Online 24/7
- Local Order Pick up
- Membership Rewards
- Free Shipping Available
- Seamless RMA Process

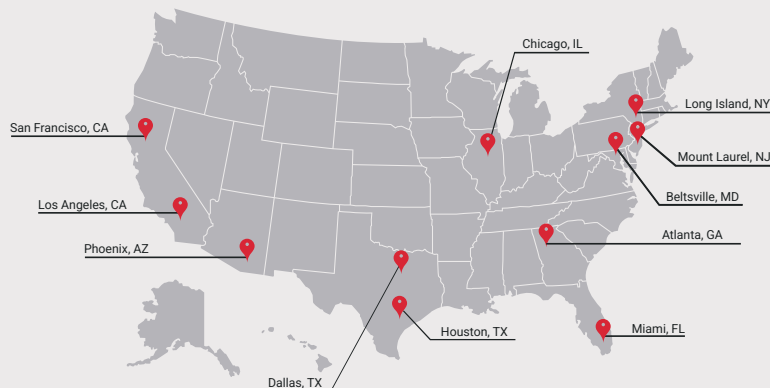

West Region

California - Los Angeles

17333 Freedom Way
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-435-2838
Email: Contact.LosAngeles@LTSecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

California - San Francisco

37370 Cedar Blvd., Suite D
Newark, CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI
**Effective December 2025*

Arizona - Phoenix

2850 S. 36th St., Suite A-7
Phoenix, AZ 85034
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI
En LTS Arizona hablamos español

Central Region

Texas - Houston

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (CST): MON - FRI
En LTS Dallas hablamos español

Illinois - Chicago

1951 Landmeier Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

East Region

New Jersey - Mount Laurel

109 West Park Dr., Suite B & C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 8:30am - 6pm (EST): MON - FRI

New York - Long Island

454 W John St
Hicksville, NY 11801
Toll Free: 888-517-3102
Tel: 646-555-3888
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
After-hour Pickup Available

Maryland - Beltsville

7001 Muirkirk Meadows Dr., Suite A
Beltsville, MD 20705
Tel: 240-493-8988
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Maryland hablamos español

Georgia - Atlanta

5933 Peachtree Industrial Blvd., Suite B
Norcross, GA 30092
Tel: 678-710-3788
Email: Support.GA@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI

Florida - Miami

1609 NW 84th Ave
Doral, FL 33126
Tel: 786-693-1813
Fax: 786-631-3639
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español



Visit LTSecurityinc.com