



Video Solutions for Security Professionals

# Platinum Q2/Q3 2026



Outdoor Box  
**ALL-IN-ONE**




AI Color 24/7  
**CLEARER**  
Anti-Corrosion



5-Lens Instadome  
**EASIER**



Panoramic  
**WIDER**

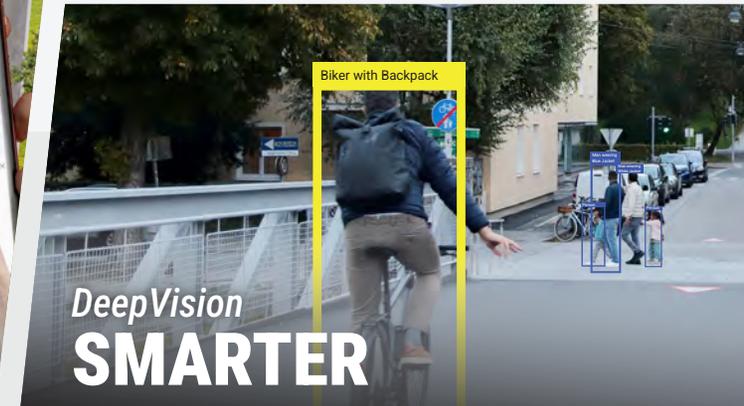

DeepVision  
**SMARTER**



# Platinum Product Tiers | Best Selling IP and Video Surveillance

### IP Cameras

AI Color 24/7 Pg 15-17



Color 24/7 Pg 18-21



Value Pg 29-33



Entry Pg 34-37



### Specialty Cameras

Fisheye Pg 25



Panoramic/ Multi-sensor Pg 23-25



PTZ Pg 26-28



LPR Pg 21



Speaker Pg 22



### NVR

DeepVision Pg 8-9



Enterprise Pg 11



Professional Pg 12



### TVI

Color 24/7 with Active Deterrence Pg 41-42



Standard Pg 43-45




### DVR

Enterprise Pg 38



Professional Pg 39-40

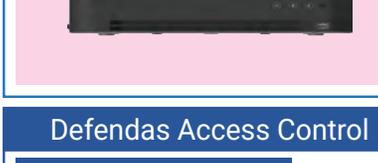

### Defendas Access Control

Defendas Access Control Pg 46-47



### Intercom & Access Control

Intercom/Access Control Pg 48-51



### Accessories

Accessories Pg 52-58



# What Makes Us Stand Out

## Since 2009

Founded in 2009, LTS provides industry-leading security solutions and value-added services in video surveillance. We offer a comprehensive range of products, including cameras, intercoms, access control systems, accessories, mobile apps, and software. With offices located nationwide across the United States, we provide same-day pickup, fast shipping, and timely delivery.

## First-class Service

- Well-stocked Inventory
- Same Day Delivery
- New Technology Demos
- Shop Online 24/7
- Local Order Pick up
- Membership Rewards
- Free Shipping Available
- Seamless RMA Process

## 100+ New Products Released Annually

We offer a wide range of high-quality products for diverse applications.

## 90K Customers Served Annually

## 120+ Sales/ Techs

- Free Security Solution Consultation
- Sales & tech support from 9am to 9pm ET

## 200,000+ sq ft Warehouse Space





## Global Supply Chain




# Icon Glossary

- |  |  |   |   |
|--|--|---|---|
|    | AI Color 24/7                            |    | Human / Vehicle Detection                             |
|    | Color 24/7                               |    | VCA 3.0 Advanced<br>Human / Vehicle Detection         |
|    | Hybrid Illumination:<br>IR + White Light |    | VCA 2.0<br>Human / Vehicle Detection                  |
|    | Active Deterrence                        |    | Direct-Search   |
|    | Two-Way Audio                            |    | Smart Tracking with<br>Human / Vehicle Classification |
|    | Built-in Speaker                         |    | Facial Recognition                                    |
|    | Built-in Microphone                      |    | Face Capture  |
|   | InstaDome                                |   | Fisheye Lens  |
|  | Anti-Corrosion                           |  | Wi-Fi   |
|  | Vandal Resistant                         |  | RAID Supported  |
|  | License Plate Recognition                |   |   |

# Platinum Naming Rules

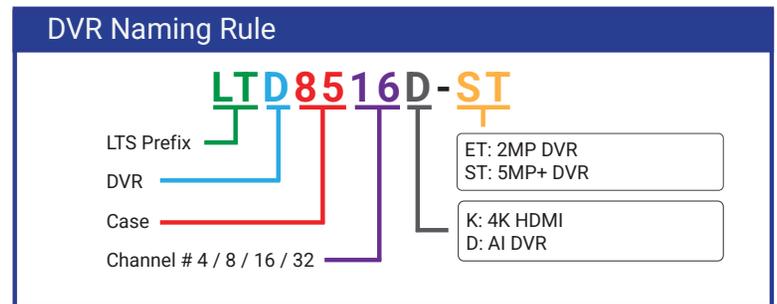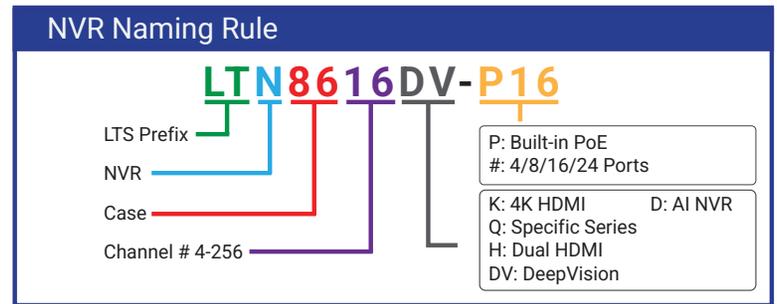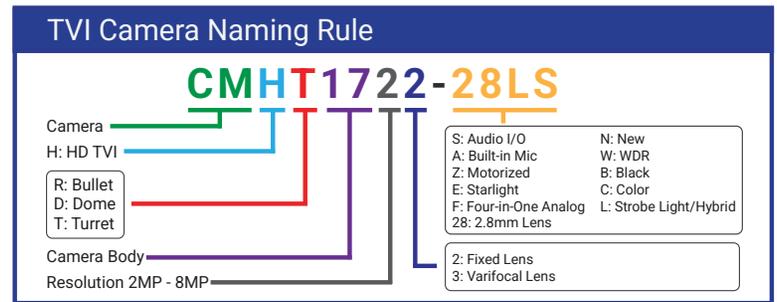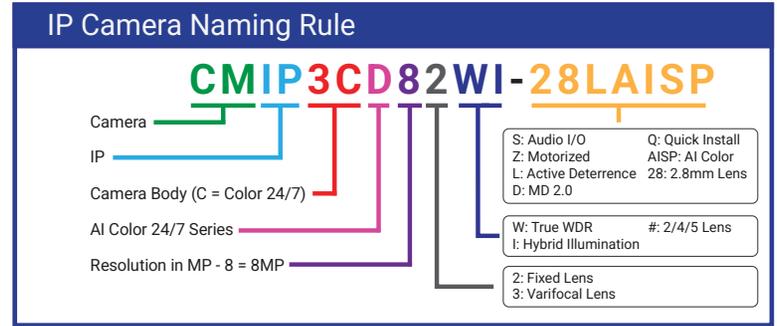

# Platinum End-to-End Solution

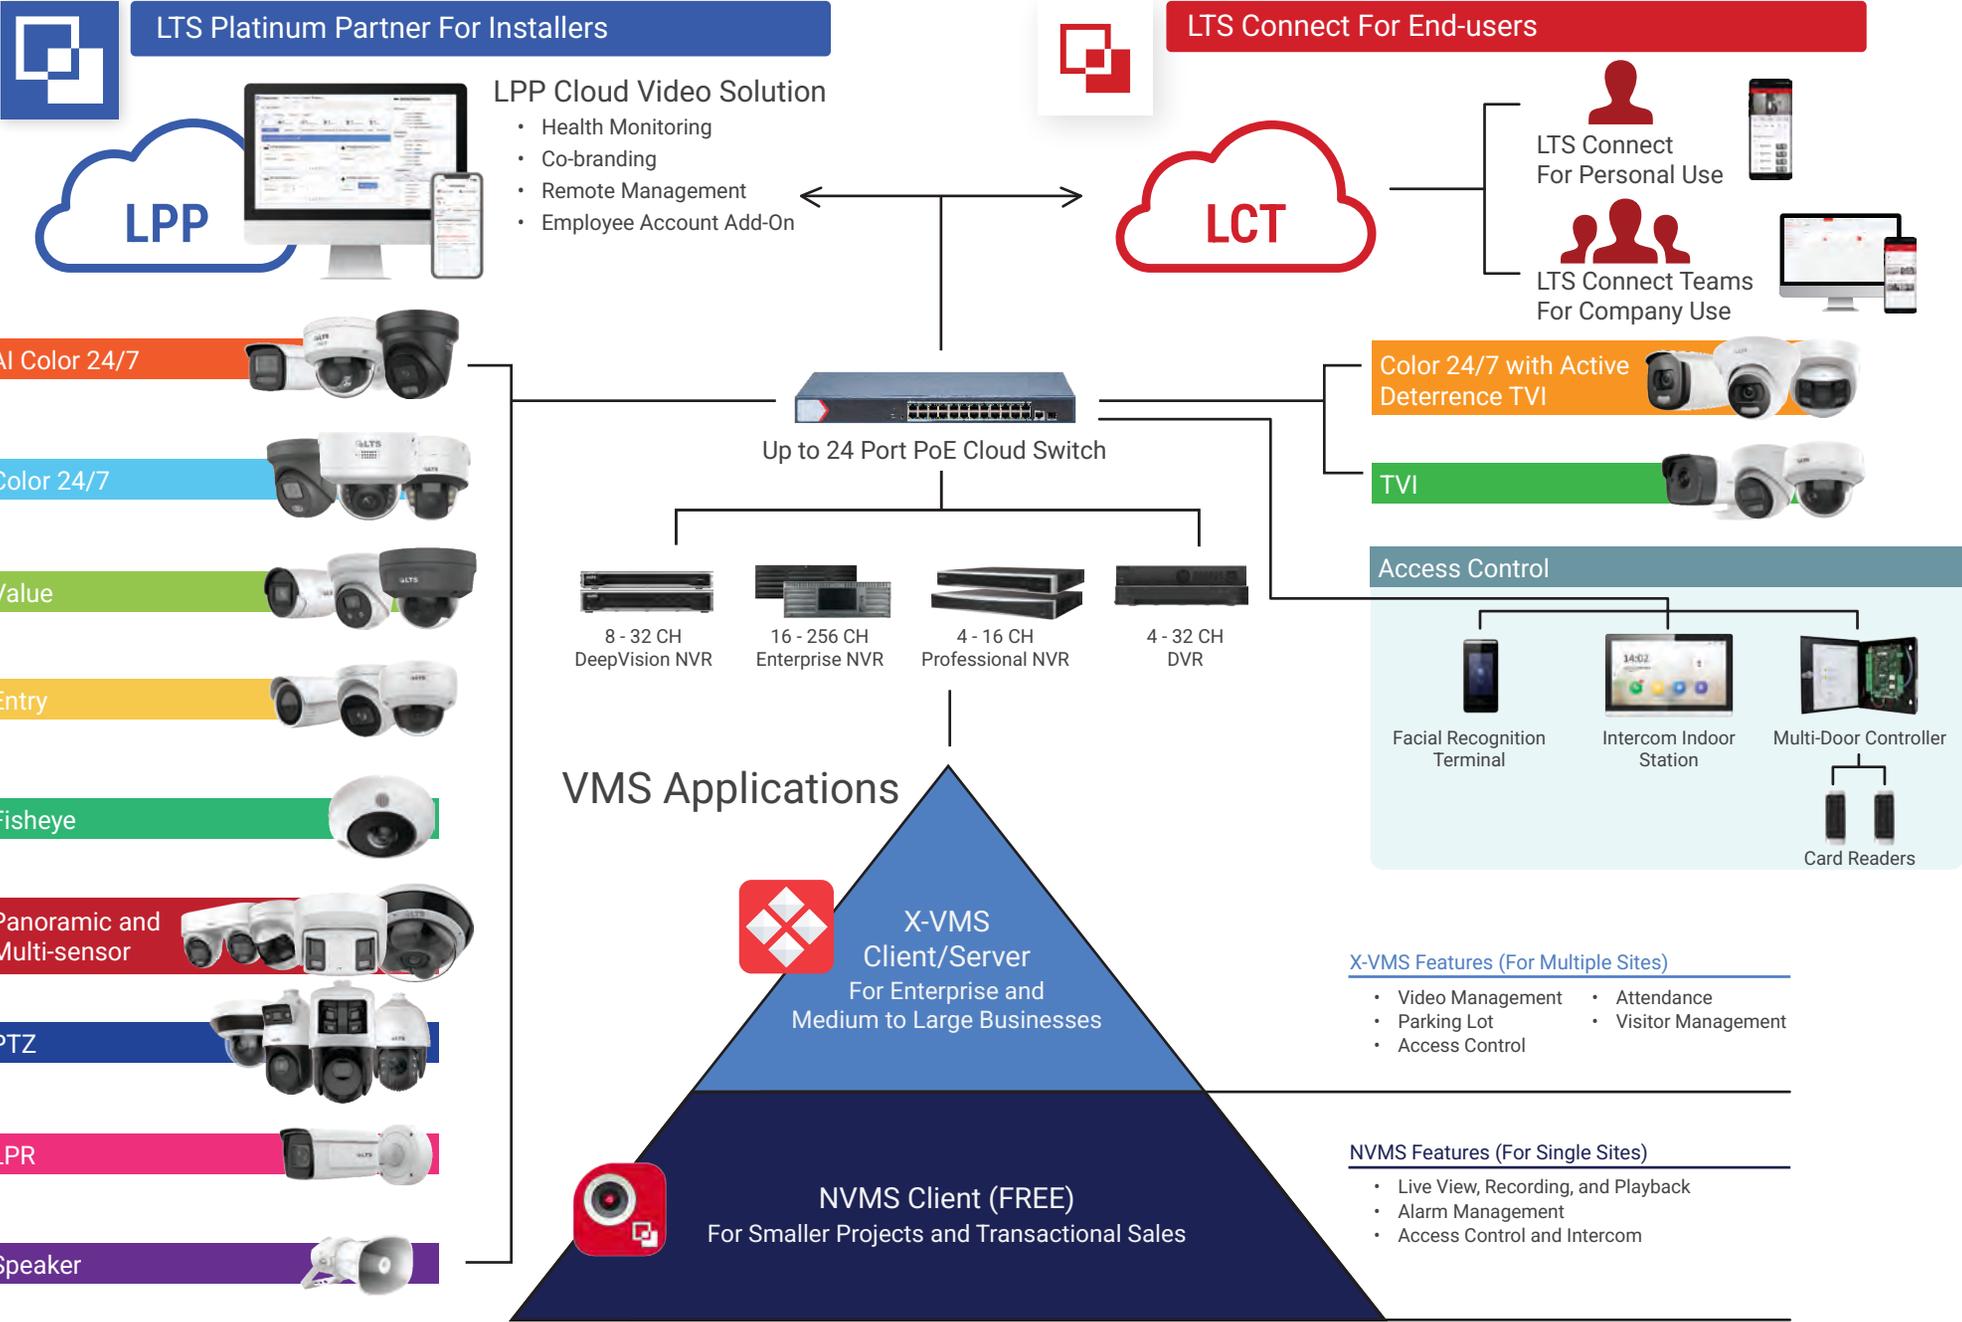


## One Software Application for Total Control

### X-VMS Architecture

#### X-VMS Features (For Multiple Sites)

- Video Management
- Parking Lot
- Access Control
- Attendance
- Visitor Management

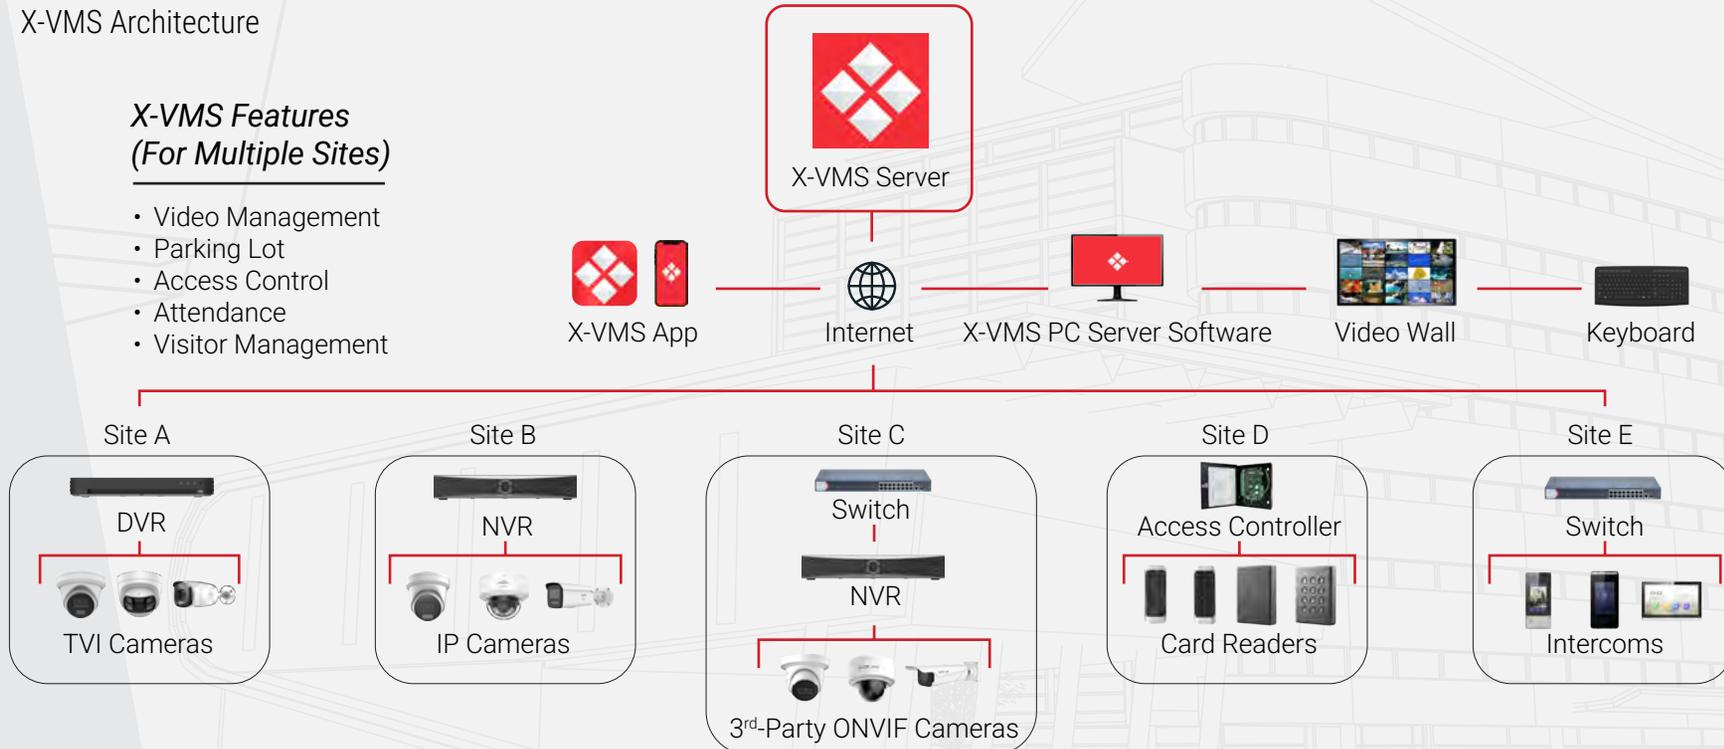

### Semantic Search Capabilities




Our access control system integrates with our DeepVision NVRs for Semantic Search, enabling faster and smarter investigation

### Mobile & Web Access Anywhere



Configure, monitor, and respond on the go. Whether on smartphone, tablet, or browser, you stay in control.

### Always-On Health Monitoring

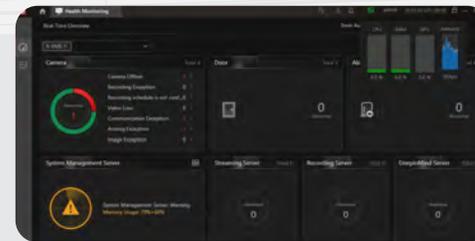

Stay in control with real-time and historical system health insights. Our intuitive dashboards make it easy to track device performance, pinpoint issues from the last 30 days, and ensure nothing goes unnoticed.

### Dynamic Viewing Modes



Designed for operational precision, our access control software supports versatile viewing modes such as live, panoramic, and grid layouts, enabling efficient surveillance management across diverse environments.

# LTS Platinum Partner (LPP) - For Installers

Management Solution that Boosts Marketing, Lowers Labor Costs, and Creates Recurring Revenue

LTS Platinum Partner



Download App

## LPP Basic FREE Feature: Remote Management



### LTS Platinum Partner For Installers


LPP allows installers to create sites and share permissions to other installers and end-users



Installers create site

LTS Platinum Partner offers integrated marketing, revenue generation, and recurring income to streamline your business success. Read more below about how these premium paid add-ons can help you grow your business.

## LPP Premium Features: Paid Add-ons

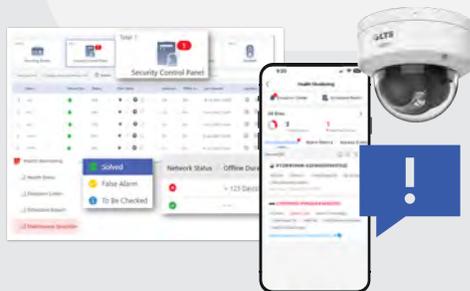

### Health Monitoring

Installers can monitor device status and provide remote health management, including:

- Regular inspections for devices, HDDs, and network failures
- Prompt notifications and logs



### Co-Branding


- Expand your company's reach with enhanced brand recognition.
- LTS promotes your business by showcasing your logo on the app, NVR interface, and reports, effectively engaging both existing and potential customers.



### Employee Account Add-On

- Installers can add users to both new and existing CCTV systems, making it easy for employees to collaborate.
- Employees can be assigned different permission levels based on their roles and responsibilities.

## Find Moments in Seconds with Semantic Search

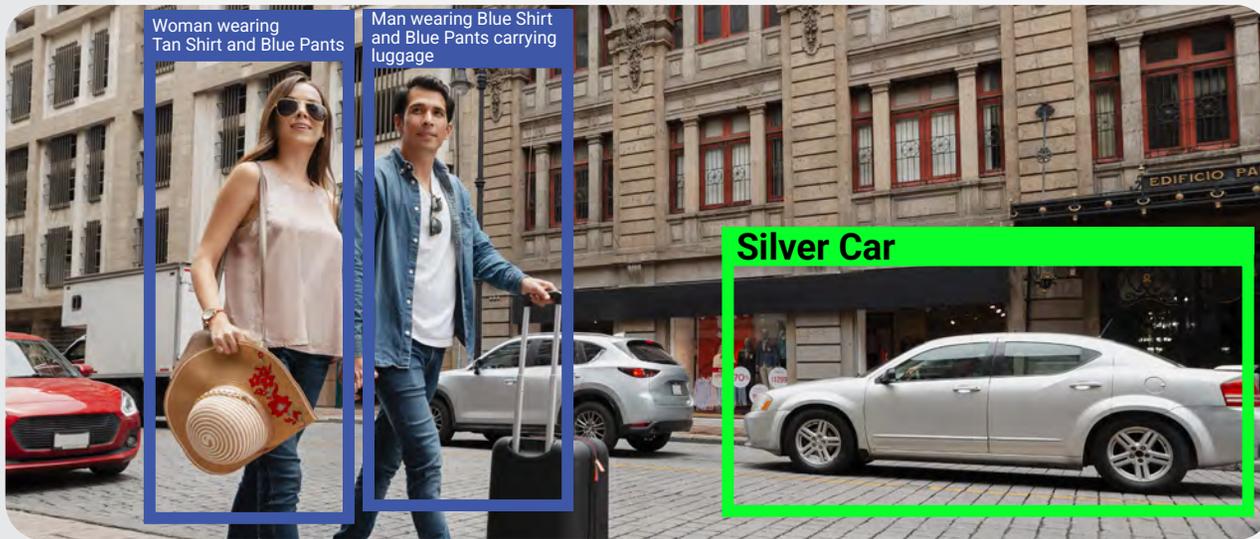

DeepVision NVRs deliver intelligent performance, seamless integration, and unmatched search efficiency. Designed for professionals who demand speed, accuracy, and reliability in every frame.

### First Semantic Search NVR



As the first NVRs to integrate Semantic Search technology, DeepVision sets a new benchmark in intelligent video analytics and operational efficiency.

### Intuitive Experience




Eliminate the need to manually review hours of footage. With Semantic Search, you can find subjects in seconds — simply enter a few descriptive keywords and let the system do the work.

### Large Multimodal Model



Powered by a large multimodal model, images and text are mapped into a shared vector space for seamless interaction. This enables advanced capabilities such as descriptive text-based searches to find the exact moment you're looking for.

### Accurate Results

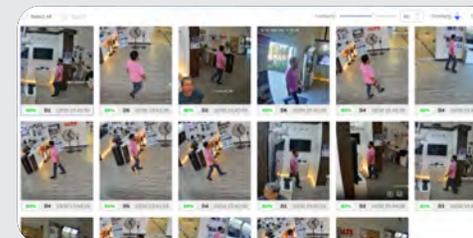

Semantic Search intelligently interprets your keywords to deliver the most relevant results. Adjust the similarity score to refine your search — higher scores return closely matched footage, while lower scores broaden the range of related results.

## DeepVision NVR

SKU	LTN8608DV-P8	LTN8616DV-P16	LTN8932DV-P16
	  	  	  
<b>Featuring</b>	  	  	  
<b>Video Input</b>	8 Ch IP @ 96 Mbps	16 Ch IP @ 192 Mbps	32 Ch @ 384 Mbps
<b>Video Output</b>	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 1080p, VGA up to 1080p
<b>Max. Recording Resolution</b>	up to 32 MP	up to 32 MP	up to 32 MP
<b>Decoding Format</b>	H.265+ / H.265 / H.264+ / H.264 / MPEG4	H.265+ / H.265 / H.264+ / H.264 / MPEG4	H.265+ / H.265 / H.264+ / H.264 / MPEG4
<b>Decoding Capability</b>	Enable AI by NVR: up to 5-ch @8MP (30 fps) Disable AI by NVR: up to 8-ch @8MP (30 fps)	Enable AI by NVR: up to 10-ch @4MP (30 fps) Disable AI by NVR: up to 16-ch @4MP (30 fps)	Enable AI by NVR: 20-ch @ 1080p (30 fps) Disable AI by NVR: 32-ch @ 1080p (30 fps)
<b>Special Features</b>	DeepVision, MD2.0, Facial Recognition, Direct-Search	DeepVision, MD2.0, Facial Recognition, Direct-Search	DeepVision, MD2.0, Facial Recognition, Direct-Search
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA
<b>Alarm Channels (In / Out)</b>	4/1	4/1	16/9
<b>Built-in PoE</b>	8 Ch	16 Ch	16 Ch
<b>Bandwidth, Connector</b>	10/100/1000 Mbps	10/100/1000 Mbps	10/100/1000 Mbps
<b>Storage</b>	2 x SATA up to 20TB each	2 x SATA up to 20TB each	4 x SATA up to 20TB each
<b>POSs Supported</b>	8 (TCP)	8 (TCP)	8 (TCP)
<b>Hot Swap HDD</b>	-	-	-
<b>Backup</b>	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
<b>Dimensions (W x D x H)</b>	15.12" x 12.48" x 2.03"	15.12" x 12.48" x 2.03"	17.32" x 15.39" x 2.81"
<b>Product QR Code</b>			

\*Please note Facial Recognition and Direct-Search cannot be used simultaneously. Compatible AI Color 24/7 or Color 24/7 cameras required.

## Instant Suspect Tracking at the Click of a Button



**Direct-Search**

With the new direct-search software, track targets accurately and quickly. The NVR reads the metadata pulled from the cameras and locates similar subjects within the search results, making it easy to find your subject of interest.

### Track Your Suspects Easily



Say goodbye to manually digging through footage to find your perpetrator. Use Direct-Search to select a target in a given frame and expand the search through all the footage for similar subjects in minutes.

### Vehicle Tracking



This software works with your camera system to help track vehicles entering your property.

## Your Gatekeeper Against Unauthorized Access



**Facial Recognition**

The NVRs pull data from the AI Color 24/7 Cameras to alert you when unauthorized visitors are onsite. This technology is perfect for ensuring the safety of your home, property, and business.

*Note: These two features cannot work simultaneously.*

### Screen Your Visitors



The facial recognition feature alerts you based on the database of allowed and blocked lists of individuals. For example, the system will notify you when VIPs on the permitted list enter the premises.

### Enhanced Monitoring Across Every Channel



The NVR leverages facial recognition technology across multiple channels to instantly alert you to security threats, such as individuals on a blocked list. This streamlined approach reduces costs by eliminating the need for real-time monitoring of each channel individually.

*Note: Requires compatible camera models*

## Enterprise Level NVR

SKU	LTN8916D-N LTN8916D-P16N	LTN8932D-N LTN8932D-P16N	LTN8964-RN	LTN07128D-R16	LTN07256D-R16
	 	 	 	  	  
<b>Featuring</b>	 	 		  	  
Video Input	16 Ch IP @ 160 Mbps	32 Ch IP @ 256 Mbps	64 Ch IP @ 400 Mbps	128 CH @ 1280 Mbps	256 CH @ 1280 Mbps
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 4K (3840 x 2160), CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320) / VGA1 up to 1080p, HDMI2 up to 4K (3840 x 2160) / VGA2 up to 1080p, CVBS up to 704 x 480	(Independent output and 8K HDMI 3 output resolution): HDMI 1/VGA 1/HDMI 2/VGA 2, HDMI 3, and HDMI 4 provide independent output respectively. The maximum resolution is 8K + 4K + 1080p	(Independent output and 8K HDMI 3 output resolution): HDMI 1/VGA 1/HDMI 2/VGA 2, HDMI 3, and HDMI 4 provide independent output respectively. The maximum resolution is 8K + 4K + 1080p
Max. Recording Resolution	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	up to 32 MP
Decoding Format	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
Decoding Capability	VCA by NVR on: 10 Ch @ 4MP VCA by NVR off: 16 Ch @ 4MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 32 Ch @ 1080p	8 Ch @ 8 MP / 16 Ch @ 4 MP	2-ch@32 MP (30 fps) / 2-ch@24 MP (30fps) / 4-ch@16 MP (30fps) / 8-ch@8 MP (30fps) / 16-ch@4 MP (30fps) / 32-ch@2 MP (30fps)	2-ch@32 MP (30 fps)/2-ch@24 MP (30fps)/4-ch@16 MP (30fps)/8-ch@8 MP (30fps)/16-ch@4 MP (30fps)/32-ch@2 MP (30fps)
Special Features	Direct-Search, Facial Recognition	Direct-Search, Facial Recognition	RAID	MD2.0, Direct-Search, Facial Recognition	MD2.0, Facial Recognition, Direct-Search
Audio In / Out	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 2 lines RCA	2-ch RCA	2-ch RCA
Alarm Channels (In / Out)	16/9	16/9	16/9	32/16	32/16
Built-in PoE	-/16Ch	-/16 Ch	-	-	-
Bandwidth, Connector	LTN8916D-N: 10/100/1000 Mbps, 2 x RJ45 LTN8916D-P16N: 10/100/1000 Mbps, 1 x RJ45	LTN8932D-N: 10/100/1000 Mbps, 2 x RJ45 LTN8932D-P16N: 10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000/2500 Mbps	10/100/1000/2500 Mbps
Storage	4 x SATA up to 16 TB each, eSATA, NAS, IP SAN	4 x SATA up to 16 TB each, eSATA, NAS, IP SAN	8 x SATA up to 16 TB each, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 x SATA up to 20 TB each	16 x SATA up to 20 TB each
POs Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	-	-
Hot Swap HDD	-	-	Yes	Yes	Yes
Backup	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 4 x USB 3.0	2 x USB 2.0, 4 x USB 3.0
Dimensions (W x D x H)	17.3" x 15.4" x 3.0"	17.3" x 15.4" x 3.0"	17.5" x 18.3" x 3.6"	17.4" x 19.5" x 5.7"	17.4" x 19.5" x 5.7"
Product QR Code	 	 			

\*Please note Facial Recognition and Direct-Search cannot be used simultaneously. Compatible AI Color 24/7 or Color 24/7 cameras required.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories


Professional Level NVR						
SKU	LTN8704QN-P4	LTN8708QN-P8	LTN8708D-P8N	LTN8716D-P16N	LTN8608D-P8N	LTN8616D-P16N
	 	 	 	 	 	 
<b>Featuring</b>			 	 	 	 
<b>Video Input</b>	4 Ch IP @ 40 Mbps	8 Ch IP @ 80 Mbps	8 Ch IP @ 80 Mbps	16 Ch IP @ 160 Mbps	8 Ch IP @ 80 Mbps	16 Ch IP @ 160 Mbps
<b>Video Output</b>	HDMI up to 4K (4096 x 2160) / VGA up to 1080p	HDMI up to 4K (4096 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480
<b>Max. Recording Resolution</b>	Up to 4K, 8 MP	Up to 4K, 8 MP	Up to 12 MP	Up to 12 MP	Up to 32 MP	Up to 32 MP
<b>Decoding Format</b>	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264	H.265+/H.265/H.264+/H.264
<b>Decoding Capability</b>	1 Ch @ 8 MP / 2 Ch @ 4 MP	1 Ch @ 8 MP / 2 Ch @ 4 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	VCA by NVR on: 5 Ch @ 8MP VCA by NVR off: 8 Ch @ 8MP	VCA by NVR on: 10 Ch @ 4MP VCA by NVR off: 16 Ch @ 4MP
<b>Special Features</b>	-	-	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search	Facial Recognition, Direct-Search
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA	IN: 1 line OUT: 1 line RCA
<b>Alarm Channels (In / Out)</b>	-	-	4/1	4/1	4/1	4/1
<b>Built-in PoE</b>	4 Ch	8 Ch	8 Ch	16 Ch	8 Ch	16 Ch
<b>Bandwidth, Connector</b>	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
<b>Storage</b>	1 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 16 TB each, NAS, IP SAN	2 x SATA up to 16 TB each, NAS, IP SAN
<b>POSS Supported</b>	-	-	-	-	4 (TCP)	4 (TCP)
<b>Backup</b>	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
<b>Dimensions (W x D x H)</b>	12.4" x 9.4" x 1.9"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.5" x 2.0"	15.2" x 12.5" x 2.0"
<b>Product QR Code</b>						

\*Please note Facial Recognition and Direct-Search cannot be used simultaneously. Compatible AI Color 24/7 or Color 24/7 cameras required.

# Control Without Compromise

# NVMS V3 (FREE)

## NVMS Architecture Application

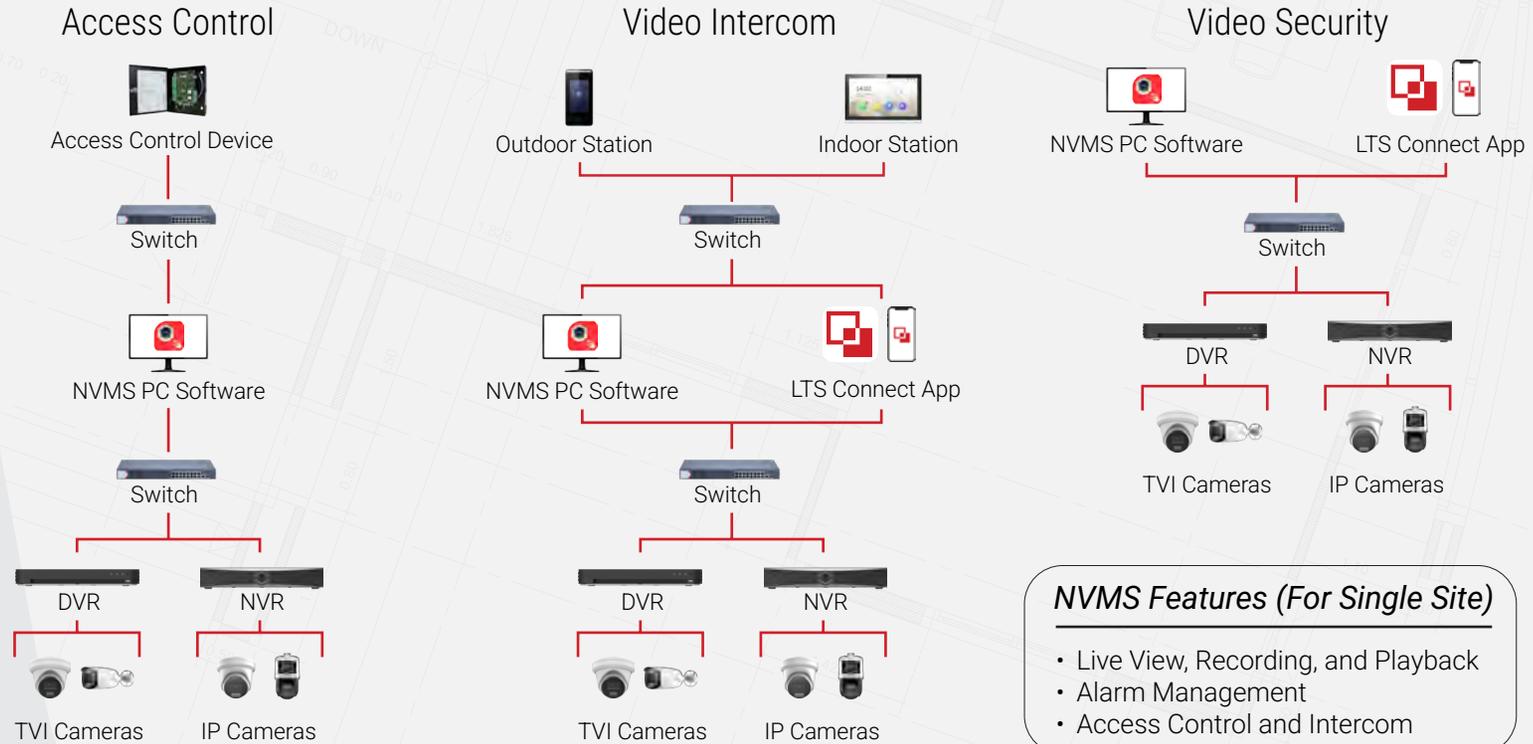

- NVMS Features (For Single Site)**
- Live View, Recording, and Playback
  - Alarm Management
  - Access Control and Intercom

### Experience Pro Control for Free



Enjoy intelligent video search, smooth navigation, and seamless access management. All without the price tag.

### Designed for Ease



NVMS is an intuitive software that puts full control at your fingertips with a clean design and simple navigation.

### Built for Single-Site Control




Designed for single-site security, our software keeps everything simple, fast, and reliable.

## 10X Better Color 24/7 Performance to Seal the Deal



LT Security proudly presents AI Color 24/7 cameras, which feature enhanced algorithms and features for outstanding visual performance. Prepare to improve your experience with high-quality images in low light, anti-corrosion housing, AI WDR, higher accuracy rate, enhanced audio, direct-search, and more.

### Advanced AI-ISP Enhances Color Image Quality in Low-Light Conditions

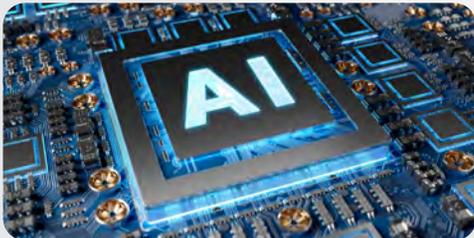

The built-in AI chip brightens images, reduces noise, enhances color accuracy, and provides more detailed clarity. Additionally, this new technology supports color correction and matching. AI WDR improves clarity and detail in environments with high-contrast lighting.

### Active Deterrence



The AI Color 24/7 cameras ending in -LAISP feature red and blue strobe lights, along with two-way audio, making them effective for deterring intruders.

### Anti-corrosion NEMA 4X Housing for Harsh Conditions



The anti-corrosion NEMA 4X housing can withstand harsh environmental conditions, ensuring reliable yearly performance.

### VCA 3.0 for Enhanced Accuracy



Minimize false alarms with our advanced human and vehicle detection algorithm. Combined with line crossing detection, our cameras help identify and alert you to unauthorized movements across defined boundaries.

AI Color 24/7 Cameras					
SKU	CMIP3CD42WI-28AISP	CMIP3CD42WIB-28AISP	CMIP3CD42WI-AISP	CMIP3CD82WIB-28AISP	CMIP3CD82WI-AISP
	 <b>NEW</b>	 <b>NEW</b>	 <b>NEW</b>	<b>4K</b>  <b>NEW</b>	<b>4K</b>  <b>NEW</b>
<b>Featuring</b>					
<b>Max. Resolution</b>	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps	8MP, 3840 x 2160 @ 30 fps
<b>Lens</b>	2.8mm, Fixed	2.8mm, Fixed	4mm, Fixed	2.8mm, Fixed	4mm, Fixed
<b>Min. Illumination</b>	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light
<b>Image Sensor</b>	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
<b>Special Features</b>	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture
<b>Audio In / Out</b>	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic
<b>Alarm In / Out</b>	-	-	-	-	-
<b>MicroSD Storage</b>	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB
<b>Protection</b>	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
<b>Product QR Code</b>					
<b>Compatible Accessories</b>	Compatible with All Cameras Above				
	 LTB701 LTB701BK Junction Box (White/Black)	 LTB342-JBOX Junction Box for LTB342-140	 LTB342-140 Wall Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

AI Color 24/7 Cameras		AI Color 24/7 - Active Deterrence				
SKU	CMIP3CD82WI-28AISP	CMIP3CD42WI-28LAISP	CMIP3CD82WI-28LAISP			
	  	 	  			
Featuring	      	        	        			
Max. Resolution	8MP, 3840 x 2160 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps			
Lens	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed			
Min. Illumination	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light			
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS			
Special Features	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, Active Deterrence with Red & Blue Strobe Lights, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, Active Deterrence with Red & Blue Strobe Lights, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture			
Audio In / Out	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker			
Alarm In / Out	-	1/1	1/1			
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB			
Protection	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X			
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE			
Product QR Code						
<b>Compatible with All Cameras Above</b>						
Compatible Accessories	 LTB701 LTB701BK Junction Box (White/Black)	 LTB342-JBOX Junction Box for LTB342-140	 LTB342-140 Wall Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

AI Color 24/7 Cameras					
SKU	CMIP7CD42WI-28AISP	CMIP7CD82WI-28AISP	CMIP8CD42WI-28AISP	CMIP9CD42WI-28AISP	CMIP9CD82WI-28AISP
					
		<b>4K</b>			<b>4K</b>
<b>Featuring</b>					
<b>Max. Resolution</b>	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps
<b>Lens</b>	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed
<b>Min. Illumination</b>	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0001 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. Light
<b>Image Sensor</b>	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
<b>Special Features</b>	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture	AI Color 24/7, Hybrid Illumination, VCA 3.0, Human/Vehicle Detection, Auto WDR 130dB, Direct-Search, Face Capture
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	Built-in Mic	-	-
<b>Alarm In / Out</b>	1/1	1/1	-	-	-
<b>MicroSD Storage</b>	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB
<b>Protection</b>	IP67, IK10, NEMA 4X	IP67, IK10, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X	IP67, NEMA 4X
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
<b>Product QR Code</b>					
<b>Compatible Accessories</b>	 LTB347H Junction Box  LTB742-120B Wall Mount with Junction Box  LTB742-120 Wall Mount  LTB731 Pendant Mount  LTB378 Pole Mount  LTB379 Corner Mount	 LTB347H Junction Box  LTB742-120B Wall Mount with Junction Box  LTB742-120 Wall Mount  LTB731 Pendant Mount  LTB378 Pole Mount  LTB379 Corner Mount	 LTB345 Junction Box  LTB378 Pole Mount  LTB379 Corner Mount  LTB801 Junction Box  LTB378 Pole Mount  LTB379 Corner Mount	 LTB801 Junction Box  LTB378 Pole Mount  LTB379 Corner Mount	

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

Color 24/7 IP Turret Cameras

SKU	CMIP3C42WI-28MDA	CMIP3C42WI-28SDL	CMIP3C82WI-28MDA	CMIP3C82WI-28SDL								
												
Featuring												
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 24 fps	8 MP, 3840 x 2160 @ 24 fps								
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed								
Min. Illumination	0.001 Lux @ F 1.0, AGC ON, 0 Lux with light	0.001 Lux @ F 1.0, AGC ON, 0 Lux with light	0.0008 Lux @ F1.0, AGC ON, 0 Lux with suppl. light	0.0008 Lux @ F1.0, AGC ON, 0 Lux with suppl. light								
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS								
Special Features	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Light, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Light, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture								
Audio In / Out	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker	Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker								
Alarm In / Out	-	1/1	-	1/1								
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB								
Protection	IP67	IP67	IP67	IP67								
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE								
Product QR Code												
Compatible Accessories	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB701 LTB701BK Junction Box (White/Black)	 LTB342-140 Wall Mount	 LTB342-JBOX Junction Box for LTB342-140	 LTB701 LTB701BK Junction Box (White/Black)	 LTB342-140 Wall Mount	 LTB342-JBOX Junction Box for LTB342-140	 LTB701 LTB701BK Junction Box (White/Black)	 LTB342-140 Wall Mount	 LTB342-JBOX Junction Box for LTB342-140
	 LTB331 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

Color 24/7 IP Dome Cameras

SKU	CMIP7C42WI-28MDA	CMIP7C82WI-28MDA				
	 	 				
Featuring						
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 24 fps				
Lens	2.8 mm, Fixed	2.8 mm, Fixed				
Min. Illumination	0.001 Lux @ F1.0, AGC ON, 0 Lux with light	0.0008 Lux @ F 1.0, AGC ON, 0 Lux with light				
Image Sensor	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS				
Special Features	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search, Face Capture	Color 24/7, Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, WDR 130 dB, Direct-Search, Face Capture				
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic				
Alarm In / Out	1/1	1/1				
MicroSD Storage	Up to 512 GB	Up to 512 GB				
Protection	IP67, IK10	IP67, IK10				
Power	12V DC, PoE	12V DC, PoE				
Product QR Code						
Compatible Accessories	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

NVR

IP Cameras

DVR


TVI

Defendas

Intercom + AC


Accessories

## Maximize Your Time with Faster, Easier Installation

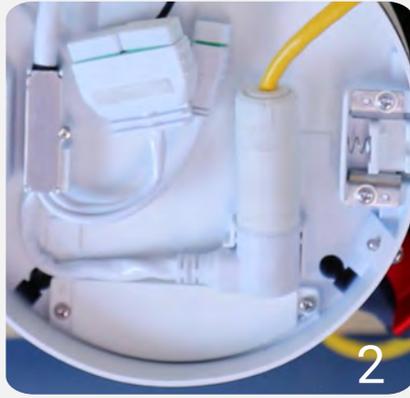

The era of lengthy installation with traditional cameras is over. InstaDome reduces installation time by 5X thanks to its removable plate, cable management, and remotely adjustable lens. It also provides key features such as active deterrence and human and vehicle detection.

### Remotely Adjust Lens

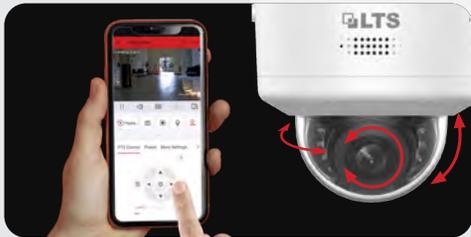

Rather than removing the camera to adjust wires and cameras by hand, you can remotely adjust the lens for pan, tilt, zoom, and z-axis via the app.

### Active Deterrence



The InstaDome triggers a white strobe light to warn intruders once they enter the detection zone. You can also use the two-way audio feature to discourage unwanted visitors from trespassing.

### Organized Cable Management



The InstaDome has a removable plate that comes off, revealing neatly arranged cables within the junction box, significantly reducing installation times by 80%.

### VCA 2.0 Human & Vehicle Detection for Reduced False Alarms



With VCA 2.0, false alarms are significantly reduced by accurately distinguishing humans and vehicles from non-relevant objects, alerting you to genuine security threats.

Color 24/7 InstaDome	
<b>SKU</b>	CMIP7C43WI-SDLQ
	
<b>Featuring</b>	
<b>Max. Resolution</b>	4 MP, 2688 x 1520 @ 30 fps
<b>Lens</b>	2.8 - 12 mm, VF, Motorized
<b>Min. Illumination</b>	0.0028 Lux @ F1.2, AGC on, 0 Lux with Light on
<b>Image Sensor</b>	1/1.8" Progressive Scan CMOS
<b>Special Features</b>	Color 24/7, Hybrid Illumination, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 120 dB, Face Capture, InstaDome
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line 2 Built-in Mics, 1 Built-in Speaker
<b>Alarm In / Out</b>	1/1
<b>MicroSD Storage</b>	Up to 512 GB
<b>Protection</b>	IP66, IK10
<b>Power</b>	12V DC, PoE
<b>Product QR Code</b>	
<b>Compatible Accessories</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> LTB342-155 Wall Mount</div> <div style="text-align: center;"> LTB342-JBOX Junction Box for Wall Mount</div> <div style="text-align: center;"> LTB378 Pole Mount</div> <div style="text-align: center;"> LTB379 Corner Mount</div> <div style="text-align: center;"> LTB781 Pendant Mount</div> </div>

License Plate IP Camera	
<b>SKU</b>	CMIP7943WLPR-32R
	 Junction Box Included
<b>Featuring</b>	
<b>Max. Resolution</b>	4 MP, 2688 x 1520 @ 30 fps
<b>Lens</b>	8 - 32 mm, Motorized
<b>Min. Illumination</b>	0.0005 Lux @ F1.2, 0 Lux with IR
<b>Supplemental Lighting</b>	Matrix IR up to 328 ft
<b>Special Features</b>	License Plate Recognition, VCA 2.0, Human/Vehicle Detection, WDR 140 dB
<b>License Plate Recognition</b>	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR
<b>MicroSD Storage</b>	Up to 256 GB
<b>Audio In / Out</b>	-
<b>Alarm In / Out</b>	2/2
<b>Protection</b>	IP67, IK10
<b>Product QR Code</b>	
<b>Compatible Accessories</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> LTB388 Pole Mount</div> <div style="text-align: center;"> LTB389 Corner Mount</div> </div>

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

# Platinum Speaker | Surveillance Box

IP Speaker	
<b>SKU</b>	LTA-NHS120-P
	
<b>Featuring</b>	
Max. Acoustic Pressure	121 dB SPL
Speaker Sensitivity	110dB 1W/1m
Frequency Response	300 Hz to 13 kHz
Microphones	2 x Electret, 100 Hz to 20 kHz
Audio Compression	G.711ulaw (64 Kbps) / G.711alaw (64 Kbps) / MP3 (128 Kbps)
Audio File Format	WAV, MP3, MP2, AAC
Alarm Channels (I/O)	1/1
Ethernet	10/100 Mbps, 1 x RJ45
Storage	64 GB EMMC
Protection Ratings	IP67
Power Input	12 VDC, 18 W max; PoE (802.3at, Class 4)
Product QR Code	

Outdoor Surveillance Box	
<b>SKU</b>	OutdoorBox-03
	 Installation Plate Included
<b>Featuring</b>	
Material	PC/ASA; LTS White (RAL 9003)
Dimension	448.72mm x 387.53mm x 225.44mm
Weight	11.5lbs
Environmental Conditions	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)
Add-Ons	Supports up to three cameras and an IP speaker
General Function	Loading Capacity of Front Panel is 17.6lbs; side panel is 11lbs
Protection	IP66, IK10
Product QR Code	
Compatible Accessories	 LTB345 Junction Box  LTB801 Junction Box  LTB701 Junction Box
	 LTB347H Junction Box  LTB453 Junction Box  LTB03-W Junction Box  LTB762 Wall Mount

\*IP Speaker requires a -D or newer NVR and a camera to configure the speaker on local GUI. iOS app (v6.8.3+), and Android app (v6.8.3+).

**Panoramic IP Cameras**

SKU	CMIP384PW-28SDL	CMIP398PW-2SDL	CMIP3C6PW-28SDL	CMIP3C8PW-SDL	CMIP9C8PW-SDL
		 <b>4K</b> <b>NEW</b>		 <b>4K</b>	 <b>4K</b> Junction Box Included
<b>Featuring</b>					
<b>Max. Resolution</b>	4MP, 3040 x 1368 @ 24 fps	8MP, 4256 x 1888 @ 20fps	6 MP, 3632 x 1632 @ 20 fps	8 MP, 5120 x 1440 @ 20 fps or 15 fps	8 MP, 5120 x 1440 @ 20 fps
<b>Lens</b>	2 x 2.8mm, 180° Horizontal, 81° Vertical	2 x 2mm, 180° Horizontal, 77° Vertical	2 x 2.8mm, 180° Horizontal, 81° Vertical	2 x 4mm, 180° Horizontal, 44° Vertical	2 x 4mm, 180° Horizontal, 44° Vertical
<b>Min. Illumination</b>	0.003 Lux @ F1.6, AGC ON, 0 Lux IR	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light	0.0005 Lux @ F1.0, 0 Lux with suppl. light	0.0005 Lux @ F1.0, 0 Lux with LED Light on	0.0005 Lux @ F1.0, AGC ON, 0 Lux with suppl. light
<b>Image Sensor</b>	2 x 1/2.5" Progressive Scan CMOS	1/2.4" Progressive Scan CMOS	2 x 1/2.5" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS
<b>Special Features</b>	Active Deterrence with White Strobe Light, VCA 2.0, Human/Vehicle Detection, WDR 120 dB	Hybrid Illumination, Active Deterrence with Blue & Red Strobe Light, Human/Vehicle Detection, WDR 120dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB	Color 24/7, VCA 2.0, Active Deterrence with White Strobe Light, Human/Vehicle Detection, WDR 130 dB
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line Built-in Mic & Speaker	Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker	IN: 1 line OUT: 1 line Built-in Mic & Speaker
<b>Alarm In / Out</b>	1/1	-	1/1	1/1	1/1
<b>MicroSD Storage</b>	Up to 512 GB	up to 512 GB	Up to 256 GB	Up to 256 GB	Up to 256 GB
<b>Protection</b>	IP67	IP67	IP67	IP67	IP67
<b>Power</b>	12V DC, PoE	12 VDC, PoE	12V DC, PoE Max 12.5W	12V DC, PoE Max 12.5W	12V DC, PoE
<b>Product QR Code</b>					
<b>Compatible Accessories</b>	 LTB378 Pole Mount  LTB379 Corner Mount  LTB701 Junction Box  LTB342-140 Wall Mount  LTB341 Pendant Mount	 LTB342-140 Wall Mount  LTB701 Junction Box	 LTB378 Pole Mount  LTB379 Corner Mount  LTB701 Junction Box  LTB342-140 Wall Mount  LTB341 Pendant Mount	 LTB378 Pole Mount  LTB379 Corner Mount  LTB342-155 Wall Mount  LTB722 Junction Box  LTB341 Pendant Mount  LTB781 Pendant Mount	 LTB378 Pole Mount  LTB379 Corner Mount  LTB801 Junction Box


\*CMIP384PW-28SDL, CMIP3C6PW-28SDL, CMIP3C8PW-SDL, CMIP9C8PW-SDL can work with LTN87Q Series, LTN87D Series, LTN86D Series and LTN89/86 Series NVRs.

## Ultimate 5-in-one Instadome Camera



This camera features five multi-directional lens to protect you from all angles. Its greatest strength is the InstaDome technology for remotely adjustable lenses, which allows you to ideally adjust the four lenses to suit your installation site.

### Versatile, Customizable Lens for Any Application

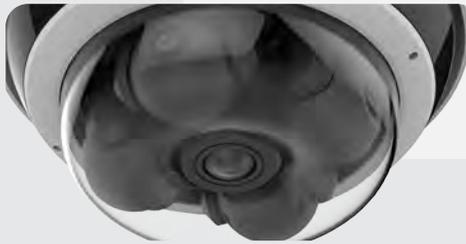


This camera has four lenses that are easily adjustable to cover angles such as 360° and 270° to secure your property from all angles. You can customize the lens configuration for different application settings, such as parking lots and corner buildings.

### Save Labor Costs with One PoE Cable for Multi-lens Cameras



We are significantly reducing labor costs by utilizing a single PoE (Power over Ethernet) cable to support a camera with five lenses. This approach eliminates the need for five separate cables and cameras, streamlining installation and maintenance while improving efficiency.

### InstaDome Technology

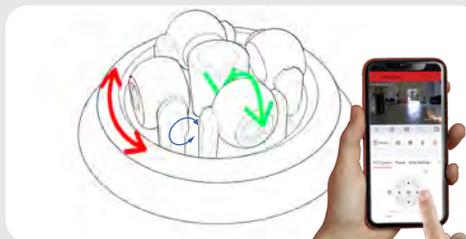

The camera has a removable plate and organized wire junction box, making installation up to 5X faster. Installers can remotely adjust the pan, tilt, rotation, and zoom lens via the app to fit your installation site's pain points.

### Blind Spot Protection



Unlike other cameras, this camera features a fixed lens at the bottom of the dome for a 360° FOV, enabling direct monitoring underneath.

Multi-lens IP Cameras		Dual Lens Camera
<b>SKU</b>	CMIP7553W5-SZ8	CMIP3743W2-DLZ
	 <b>22MP</b> 	 
<b>Featuring</b>		
<b>Max. Resolution</b>	Four: 2560 x 1920 @ 30 fps One: 1440 x 1440 @ 30 fps	Channel 1: 2688 x 1520, Channel 2: 2688 x 1520
<b>Lens</b>	4 x 2.8 - 8 mm, Remotely Adjustable Lenses for Pan, Tilt, Zoom, and Rotate; 1 x 2 mm, Fixed	Channel 1: Varifocal lens, motorized lens, 2.8 mm and 4 mm, Channel 2: Varifocal lens, motorized lens, 2.8 mm and 4 mm
<b>Image Sensor</b>	Varifocal: 1/2.4" Progressive Scan CMOS; Fixed: 1/2.5" Progressive Scan CMOS	Channel 1: 1/3" Progressive Scan CMOS, Channel 2: 1/3" Progressive Scan CMOS
<b>Special Features</b>	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, InstaDome	Hybrid Illumination, VCA 2.0, Active Deterrence with Red & Blue Strobe Lights, Human / Vehicle Detection, WDR 120dB
<b>MicroSD Storage</b>	Up to 1 TB	up to 512 GB
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line	Built-in Mic & Speaker, Arrayed dual-mic
<b>Alarm In / Out</b>	2/2	-
<b>Protection</b>	IP67, IK10	IP67
<b>Min. Illumination</b>	Color: 0.005 Lux @ F1.2, AGC ON B/W: 0.002 Lux @ F1.2, AGC ON B/W: 0 Lux with IR	Channel 1: Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR, Channel 2: Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
<b>Supplemental Lighting</b>	Matrix IR LED up to 110 ft	-
<b>Power</b>	12V DC, PoE+	12V DC, PoE+
<b>Product QR Code</b>		
<b>Compatible Accessories</b>	<b>Compatible with Multi-Lens IP Cameras</b>	
	 LTB742 Parapet Wall Mount  LTB397 Corner Mount  LTB378 Pole Mount  LTB751 Pendant Mount 20" (50cm)  LTB762 Wall Mount  LTB751-20 Pendant Mount 7.8" (20cm)	 LTB372WM Wall Mount  LTB373PM Pendant Mount

Fisheye IP Cameras		
<b>SKU</b>	CMIP7106F-SE	CMIP7112F-SE
	 	 <b>12MP</b> 
<b>Featuring</b>		
<b>Max. Resolution</b>	6 MP, 2560 x 2560 @ 30 fps	12 MP, 3504 x 3504 @ 30 fps
<b>Lens</b>	1.16 mm fisheye, Fixed	1.16 mm fisheye, Fixed
<b>View</b>	360° fisheye, 180° panoramic	360° fisheye, 180° panoramic
<b>Mode</b>	Multiple Viewing Modes and Virtual PTZ	
<b>Supplemental Lighting</b>	IR up to 50 ft	
<b>Min. Illumination</b>	Color: 0.01 Lux @ F2.25, AGC ON B/W: 0.005 Lux @ F2.25, AGC ON B/W: 0 Lux with IR	
<b>MicroSD Storage</b>	Up to 512 GB	
<b>Special Features</b>	Human/Vehicle Detection, VCA 2.0, Digital WDR, Heat Mapping, Dewarping, People Counting, Queue Management	
<b>Audio / Alarm</b>	IN: 1 line OUT: 1 line 4 Built-in Mics, 1 Built-in Speaker	2/2 IN: 1 line OUT: 1 line 4 Built-in Mics, 1 Built-in Speaker
<b>Protection</b>	IP67, IK10	
<b>Power</b>	12V DC, PoE	
<b>Product QR Code</b>		
<b>Compatible Accessories</b>	<b>Compatible with All Cameras Above</b>	
	 LTB701 LTB701BK Junction Box (White/Black)  LTB342-140 Wall Mount  LTB342-JBOX Junction Box for LTB342-140	
	 LTB341 Pendant Mount  LTB378 Pole Mount  LTB379 Corner Mount	

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

## Best of Both Worlds: Exceptional Detail and Wide Coverage




The panoramic PTZ camera, which features two separate cameras in one unit, is an excellent choice for monitoring vast areas. The 180° panoramic camera on top captures high-quality images of vast spaces. The PTZ camera below uses a 25x zoom lens to deliver detailed, clear

### 180° Wide Angle Coverage



The 180° panoramic camera covers vast, broad areas, making it perfect for applications such as roads, railways, airports, public venues, and more.

### 25x Zoom Lens for Long-Range

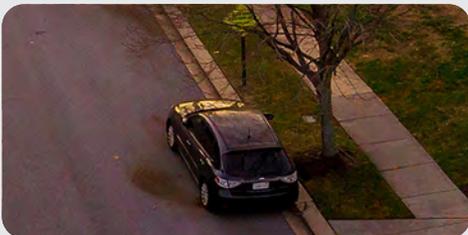


The PTZ camera below has a 25x zoom lens, which provides detailed, close-up images for tracking humans or vehicles.

### Save Labor Costs with One Installation



The panoramic and PTZ lenses offer coverage of multiple angles, making it a tremendous cost-efficient solution. A single PoE (Power over Ethernet) cable can support a camera with three lenses to save labor costs.

### Human & Vehicles Auto-tracking

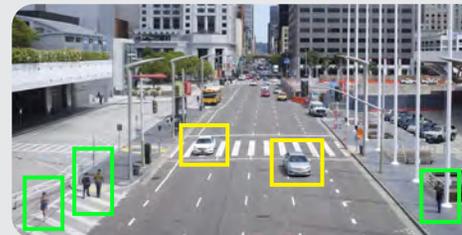

This panoramic PTZ can zoom in and auto-track humans and vehicles, ensuring your property is safe in sensitive, restricted areas.

## PTZ IP Cameras

SKU	PTZIP4C84W-X25IR	PTZIP4C44W-X25IR	PTZIP772NW-X32IR	PTZIP778NW-X25IR
	  			 
<b>Featuring</b>	      	      	      	      
<b>Max. Resolution</b>	Fixed: 8 MP 3840 x 2160 @ 20 fps PTZ: 4 MP 2560 x 1440 @ 30 fps	Fixed & PTZ Lens: 4 MP 2560 x 1440 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	8 MP, 3840 x 2160 @ 24 fps
<b>Image Sensor</b>	Fixed: 1/2.5" CMOS; PTZ: 1/2.8" CMOS	Fixed: 1/3" CMOS; PTZ: 1/2.8" CMOS	1/2.8" CMOS	1/1.8" CMOS
<b>Lens(es) and Zoom</b>	Fixed: 2.8 mm Panoramic, 180° Horizontal, 80° Vertical PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus, Tracking	Fixed: 2.8 mm; PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.8 - 153 mm, 32x Optical Zoom, Auto Focus	5.9 - 147.5 mm, 25x Optical Zoom, Auto Focus
<b>Min. Illumination</b>	Fixed: 0.0005 Lux @ F1.0, PTZ: 0.005 Lux @ F1.6, ACG ON	Fixed: 0.0005 Lux @ F1.0; PTZ: 0.005 Lux @ F1.6, AGC ON	0.005 Lux @ F1.6	0.005 Lux @ F1.5
<b>Supplemental Lighting</b>	Fixed: White LED up to 100 ft PTZ: IR LED up to 300 ft	Fixed: White LED up to 98 ft; PTZ: IR LED up to 328 ft	IR LEDs up to 656 ft	IR LEDs up to 656 ft
<b>Special Features</b>	Color 24/7, VCA 2.0, Human/Vehicle Detection, Face Capture (PTZ Only), Smart Tracking with Human/Vehicle Classification	Color 24/7, VCA 2.0, Human/Vehicle Detection, Face Capture (PTZ Only), Smart Tracking with Human/Vehicle Classification	VCA 2.0, Active Deterrence with White Strobe light, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification	VCA 2.0, Active Deterrence with White Strobe light, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification
<b>MicroSD Storage</b>	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 256 GB
<b>Range of Motion</b>	Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)	Pan 0° - 360°, Tilt -15° - 90° (Auto-flip)	Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)	Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)
<b>Image Enhancement</b>	Panoramic: Digital WDR PTZ: 120dB WDR	WDR 120 dB	WDR 120 dB	WDR 120 dB
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line Built-in Speaker	IN: 1 line OUT: 1 line Built-in Speaker
<b>Alarm In / Out</b>	1/1	1/1	2/1	2/1
<b>Protection</b>	IP66	IP66	IP66, IK10	IP66, IK10
<b>Power</b>	12V DC, PoE+ (802.3at), Max 24 W (max. 11 W for supplemental light, max. 2.6 W for heater)	12V DC, PoE+ (802.3at), Max 24W	24 VAC, High PoE Max 42W (max. 18W for IR, max. 10W for heater)	24 VAC, High PoE Max 42W (max. 18W for IR, max. 10W for heater)
<b>Dimensions</b>	Ø 6.5 x 11.9"	Ø 6.5 x 14.7"	Ø 8.66 x 13.91"	Ø 8.66 x 13.91"
<b>Product QR Code</b>	Wall Mount Bracket (LTB212) Included, PoE+ Injector Sold Separately 	Wall Mount Bracket (LTB212) Included, PoE+ Injector Sold Separately 	Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately 	Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately 

### Compatible with All Cameras Above

Compatible Accessories								
	LTB751-20 Pendant Mount 7.8" (20cm)	LTB751 Pendant Mount 20" (50cm)	LTB742 Parapet Wall Mount	LTB762 Wall Mount	LTB378 Pole Mount (Must Use LTB762)	LTB379 Corner Mount (Must Use LTB762)	LTB397 Corner Mount (Must Use LTB212 or LTB762)	POE-PTZPi60N High PoE+ (60W)

\*Facial Recognition feature is only available with compatible NVR (-D and -DV) models.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

**PTZ IP Cameras**

SKU	PTZIP424W-X251R	PTZIP514NW-X251R
		
<b>Featuring</b>		
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps	4 MP, 2560 x 1440 @ 30 fps
Image Sensor	1/2.8" CMOS	1/2.8" CMOS
Lens and Zoom	4.8 - 120 mm, 25x Optical Zoom, Auto Focus, Auto Tracking	4.8 - 120 mm, 25x Optical Zoom, Auto Focus
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Supplemental Lighting	IR LEDs up to 164 ft, Auto Intensity Adjustment	IR LEDs up to 492 ft
Special Features	VCA 2.0, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification	VCA 2.0, Human/Vehicle Detection, Face Capture, Smart Tracking with Human/Vehicle Classification
MicroSD Storage	Up to 256 GB	Up to 256 GB
Range of Motion	Pan 0° - 360°, Tilt -5° - 90°	Pan 0° - 360°, Tilt -15° to - 90° (Auto flip)
Image Enhancement	WDR 120 dB	WDR 120 dB
Audio In / Out	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line
Alarm In / Out	2/2	2/1
Protection	IP66	IP66
Power	12V DC, PoE+ (802.3at), Max 24W	24 VAC, PoE+ (802.3at), Max 24W (max. 9 W for IR and max. 1.6 W for heater)
Dimensions	Ø 6.65 x 6.34"	Ø 8.27 x 13.57"
Product QR Code	Wall Mount Bracket (LTB412) Included, PoE+ Injector Sold Separately 	Wall Mount Bracket (LTB762) Included, PoE+ Injector Sold Separately 
Compatible Accessories	 LTB412 Wall Mount  LTB378 Pole Mount  LTB379 Corner Mount  LTB342-JBOX Junction Box  LTB751-20 Pendant Mount 7.8" (20cm)  LTB751 Pendant Mount 20" (50cm)  LTB742 Paragel Wall Mount  LTB378 Pole Mount (Must use LTB762)  LTB397 Corner Mount (Must use LTB212 or LTB762)  LTB762 Wall Mount	

**Palm-size PTZ IP Cameras**

SKU	PTZIP204W-X41R	
		
<b>Featuring</b>		
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps	
Image Sensor	1/3" CMOS	
Min. Illumination	0.005 Lux @ F1.6	
Lens and Zoom	2.8 - 12 mm, 4x Optical Zoom	
Supplemental Lighting	IR LEDs up to 66 ft, Auto Intensity Adjustment	
Range of Motion	Pan 0° - 330°, Tilt 0° - 90°	
Special Features	VCA 2.0, Human/Vehicle Detection, WDR 120 dB	
MicroSD Storage	Up to 256 GB	
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic	
Protection	IP66, IK10	
Power	12V DC, PoE Max 12W	
Dimensions	Φ 5.15 x 4.00"	
Product QR Code	PoE Injector and Wall Mount (LTB202) Sold Separately	
Compatible Accessories	 LTB347H/ LTB347HB Junction Box (White/Black)  LTB202 Wall Mount  LTB774 Pendant Mount 78" (200cm)	

\*Facial Recognition feature is only available with compatible NVR (-D and -DV) models.

## Turret IP Cameras

SKU	CMIP3342WI-28SDL CMIP3342WIB-28SDL	CMIP3382WI-28SDL CMIP3382WIB-28SDL	CMIP3283W-SDZ					
	 	  	  Junction Box Included					
<b>Featuring</b>								
<b>Max. Resolution</b>	4MP, 2688 × 1520 @ 30 fps	8MP, 3840 × 2160 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps					
<b>Image Sensor</b>	1/2.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS					
<b>Lens</b>	2.8 mm, Fixed	2.8 mm, Fixed	2.8 - 12 mm, Motorized					
<b>Min. Illumination</b>	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light	0.005 Lux @ F1.6					
<b>Smart Focus</b>	-	-	Yes					
<b>Supplemental Lighting</b>	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 130 ft					
<b>Special Features</b>	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search and Facial Recognition					
<b>Audio In / Out</b>	Built-in Mic & Speaker, Arrayed Dual Mic	Built-in Mic & Speaker, Arrayed Dual Mic	IN: 1 line OUT: 1 line					
<b>Alarm In / Out</b>	-	-	1/1					
<b>MicroSD Storage</b>	Up to 512GB	Up to 512GB	Up to 256GB					
<b>Protection</b>	IP67	IP67	IP67, IK10					
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE					
<b>Product QR Code</b>								
<b>Compatible Accessories</b>	 LTB301 Wall Mount	 LTB331 Pendant Mount	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB331 Pendant Mount	 LTB307 Junction Box	 LTB701 Junction Box	 LTB342-140 Wall Mount
	 LTB03-W/ LTB03-BK Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB03-W/ LTB03-BK Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

### Mini Dome Fixed Lens IP Cameras

SKU	CMIP3142W-28SDA	CMIP3142W-28SDA-WIFI	CMIP3182W-28SDA	CMIP1C42W-28MDA	CMIP1C42WB-28MDA
					
<b>Featuring</b>					
<b>Max. Resolution</b>	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	8MP, 3840 x 2160 @ 30 fps	4MP, 2688 x 1520 @ 30 fps	4MP, 2688 x 1520 @ 30 fps
<b>Lens</b>	2.8 mm, Fixed	2.8 mm, Fixed	2.8mm, Fixed	2.8mm, Fixed	2.8mm, Fixed
<b>Min. Illumination</b>	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6, AGC ON 0 Lux with IR	0.0005 Lux @ F1.0, AGC ON 0 Lux with suppl. Light	0.0005 Lux @ F1.0, AGC ON 0 Lux with suppl. Light
<b>Supplemental Lighting</b>	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft
<b>Special Features</b>	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, Direct-Search	Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture	Color 24/7, VCA 2.0, Human/Vehicle Detection, WDR 130dB, Direct-Search, Face Capture
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic	IN: 1 line OUT: 1 line Built-in Mic
<b>Alarm In / Out</b>	1/1	1/1	1/1	1/1	1/1
<b>Built-in Wi-Fi</b>	-	2.4 GHz, 802.11g/n	-	-	-
<b>MicroSD Storage</b>	Up to 256 GB	Up to 256 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB
<b>Protection</b>	IP67, IK8	IP67, IK8	IP67, IK8	IP67, IK8	IP67, IK8
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
<b>Product QR Code</b>					
<b>Compatible Accessories</b>	Compatible with All Cameras Above				
	 LTB347H/ LTB347HB Junction Box (White/Black)	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount

\*Direct-Search and Facial Recognition features are only available with compatible NVR (-D and -DV) models.

## Dome Fixed Lens IP Cameras

SKU	CMIP7342WI-28MDA	CMIP7382WI-28MDA				
	 	 				
						
<b>Featuring</b>	    	    				
Max. Resolution	4 MP, 2688 × 1520 @ 30 fps	8MP, 3840 × 2160 @ 20 fps				
Lens	2.8mm, Fixed	2.8 mm, Fixed				
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with light	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with light				
Image Sensor	1/2.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS				
Special Features	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB	Hybrid Illumination, VCA 2.0, Human/Vehicle Detection, True WDR 120dB				
Audio In / Out	IN: 1 line OUT: 1 line Built-in Mic, Arrayed Dual-Mic	IN: 1 line OUT: 1 line Built-in Mic, Arrayed Dual-Mic				
Alarm In / Out	1/1	1/1				
MicroSD Storage	up to 512GB	up to 512GB				
Protection	IP67, IK10	IP67, IK10				
Power	12 VDC, PoE	12 VDC, PoE				
Product QR Code						
Compatible Accessories	Compatible with All Cameras Above					
	 <b>LTB347H</b> Junction Box	 <b>LTB742-120</b> Wall Mount	 <b>LTB742-120B</b> Wall Mount with Junction Box	 <b>LTB731</b> Pendant Mount	 <b>LTB378</b> Pole Mount	 <b>LTB379</b> Corner Mount

\*Direct-Search feature is only available with compatible NVR (-D and -DV) models.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

Dome Vari-focal Lens IP Cameras

SKU	CMIP7243W-SDZ	CMIP7283W-SDZ
	 Junction Box Included	  Junction Box Included
<b>Featuring</b>	    	    
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft
Smart Focus	Yes	Yes
Special Features	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 120 dB, Direct-Search
Audio In / Out	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line
Alarm In / Out	1 / 1	1 / 1
MicroSD Storage	Up to 256 GB	Up to 256 GB
Protection	IP67, IK10	IP67, IK10
Power	12V DC, PoE	12V DC, PoE
Product QR Code		

Compatible with All Cameras Above					
<b>Compatible Accessories</b>	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB781 Pendant Mount

\*Direct-Search feature is only available with compatible NVR (-D and -DV) models.

**Bullet Vari-focal Lens IP Cameras**

**Bullet Fixed Lens IP Cameras**

SKU	CMIP9743W-SDZ	CMIP9783W-SDZ	CMIP9243W-SZ	CMIP9342WI-28SDL	CMIP9382WI-28SDL
	 Junction Box Included	 Junction Box Included	 Junction Box Included	 <b>NEW</b>	 <b>NEW</b>
<b>Featuring</b>					
<b>Max. Resolution</b>	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps	4 MP, 2560 x 1440 @ 60 fps	4MP, 2688 x 1520 @ 30fps	8MP, 3840 x 2160 @ 20fps
<b>Lens</b>	2.8 - 12 mm, Motorized	2.8 - 12 mm, Motorized	4.7 - 118 mm, Motorized	2.8 mm, Fixed	2.8 mm, Fixed
<b>Min. Illumination</b>	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.009 Lux @ F1.6	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
<b>Image Sens</b>	1/3" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
<b>Supplemental Lighting</b>	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	IR up to 656 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft
<b>Special Features</b>	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection WDR 120 dB, Direct-Search	VCA 2.0, Human/Vehicle Detection, WDR 140 dB, Face Capture	Hybrid Illumination, VCA 2.0, True WDR 120dB, Human/Vehicle Detection, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm	Hybrid Illumination, VCA 2.0, True WDR 120dB, Human/Vehicle Detection, Active Deterrence with Red & Blue Strobe Lights and Audio Alarm
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line	IN: 1 line OUT: 1 line Built-in Mic & Speaker, Arrayed Dual-Mic	IN: 1 line OUT: 1 line Built-in Mic & Speaker, Arrayed Dual-Mic
<b>Alarm In / Out</b>	1 / 1	1 / 1	2 / 2	1/1	1/1
<b>MicroSD Storage</b>	Up to 256 GB	Up to 256 GB	Up to 1 TB	up to 512GB	up to 512GB
<b>Protection</b>	IP67, IK10	IP67, IK10	IP67, IK10	IP67	IP67
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE	12 VDC, PoE	12 VDC, PoE
<b>Product QR Code</b>					
<b>Compatible Accessories</b>	 LTB378 Pole Mount  LTB379 Corner Mount	 LTB378 Pole Mount  LTB379 Corner Mount	 LTB388 Pole Mount  LTB389 Corner Mount	 LTB801 Junction Box  LTB378 Pole Mount  LTB379 Corner Mount	 LTB801 Junction Box  LTB378 Pole Mount  LTB379 Corner Mount

\*Direct-Search feature is only available with compatible NVR (-D and -DV) models.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

Turret Fixed Lens IP Cameras

SKU	CMIP1342WE-28MDA	CMIP1382NW-28MA	CMIP1382WE-28MDA					
								
<b>Featuring</b>	  		  					
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	8 MP, 3840 x 2160 @ 15 fps					
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed					
Min. Illumination	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.01 Lux @ F2.0					
Smart Focus	-	-	-					
Supplemental Lighting	Matrix IR and White Light up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR and White Light up to 100 ft					
Special Features	Hybrid Illumination, Human/Vehicle Detection, WDR 120 dB	WDR 120 dB	Hybrid Illumination, Human/Vehicle Detection, WDR 120 dB					
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic					
MicroSD Storage	Up to 512 GB	Up to 256 GB	Up to 512 GB					
Protection	IP67	IP67	IP67					
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE					
Product QR Code								
<b>Compatible with All Cameras Above</b>								
<b>Compatible Accessories</b>	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB371 Pendant Mount 21.5\" (55cm)	 LTB331 Pendant Mount 21.5\" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

Turret Fixed Lens IP Cameras				Turret Vari-focal IP Cameras								
SKU	CMIP1042W-28MA			CMIP1043NW-MZ				CMIP1043W-MDZ				
												
<b>Featuring</b>												
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps			4 MP, 2560 x 1440 @ 20 fps				4MP, 2560 x 1440 @ 20 fps				
Lens	2.8 mm, Fixed			2.8 - 12 mm, VF, Motorized				2.8 - 12 mm, Motorized				
Min. Illumination	0.01 Lux @ F2.0			0.005 Lux @ F1.6				0.005 Lux @ F1.6, AGC ON 0 Lux with IR				
Smart Focus	-			Yes				-				
Supplemental Lighting	Matrix IR LED up to 100 ft			Matrix IR LED up to 100 ft				Matrix IR LED up to 100 ft				
Special Features	WDR 120 dB			WDR 120 dB				Human/Vehicle Detection, WDR 120dB				
Audio In / Out	Built-in Mic			-				IN: 1 line OUT: 1 line				
MicroSD Storage	Up to 256 GB			Up to 256 GB				Up to 256 GB				
Protection	IP67			IP67				IP67				
Power	12V DC, PoE			12V DC, PoE				12V DC, PoE				
Product QR Code												
Compatible Accessories												
												

Dome IP Cameras

SKU	CMIP7042W-28MA			CMIP7043NW-MZ		
						
<b>Featuring</b>	 					
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps			4 MP, 2560 x 1440 @ 20 fps		
Lens	2.8 mm, Fixed			2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F2.0			0.005 Lux @ F1.6		
Supplemental Lighting	IR LED up to 100 ft			Matrix IR LED up to 100 ft		
Special Features	WDR 120 dB			WDR 120 dB		
Audio In / Out	Built-in Mic			-		
MicroSD Storage	Up to 256 GB			Up to 256 GB		
Range of Motion	2-Axis			3-Axis		
Protection	IP67, IK10			IP67, IK10		
Power	12V DC, PoE			12V DC, PoE		
Product QR Code						
Compatible Accessories	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB701 Junction Box	 LTB342-135B Wall Mount with Junction Box	 LTB381 Pendant Mount 22" (56cm)
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount		 LTB379 Corner Mount

**Bullet IP Cameras**

SKU	CMIP8042W-28MA	CMIP8043NW-MZ	CMIP8043W-MDZ				
							
<b>Featuring</b>			 				
<b>Max. Resolution</b>	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps	4MP, 2560 x 1440 @ 20 fps				
<b>Lens</b>	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, Motorized				
<b>Min. Illumination</b>	0.01 Lux @ F2.0	0.005 Lux @ F1.6	0.005 Lux @ F1.6, AGC ON 0 Lux with IR				
<b>Smart Focus</b>	-	Yes	-				
<b>Supplemental Lighting</b>	Matrix IR LED up to 100 ft	Matrix IR LED up to 165 ft	Matrix IR LED up to 165 ft				
<b>Special Features</b>	WDR 120 dB	WDR 120 dB	Human/Vehicle Detection, WDR 120dB				
<b>Audio In / Out</b>	Built-in Mic	-	IN: 1 line OUT: 1 line				
<b>MicroSD Storage</b>	Up to 256 GB	Up to 256 GB	Up to 256 GB				
<b>Protection</b>	IP67	IP67	IP67				
<b>Power</b>	12V DC, PoE	12V DC, PoE	12V DC, PoE				
<b>Product QR Code</b>							
<b>Compatible Accessories</b>	 LTB345 Junction Box	 LTB801 Junction Box	 LTB8378 Pole Mount	 LTB8379 Corner Mount	 LTB801 Junction Box	 LTB8378 Pole Mount	 LTB8379 Corner Mount

**Indoor Wi-Fi IP Camera**

SKU	CMIP8942W-28SDA-WIFI
	
<b>Featuring</b>	    
<b>Max. Resolution</b>	4 MP, 2688 x 1520 @ 30 fps
<b>Lens</b>	2.8 mm, Fixed
<b>Min. Illumination</b>	0.005 Lux @ F1.6
<b>Compression</b>	H.265+/H.265/H.264+/H.264
<b>Supplemental Lighting</b>	Matrix IR LED up to 33 ft
<b>Special Features</b>	VCA2.0, WDR 120dB, Direct-Search
<b>Audio In / Out</b>	Built-in Mic & Speaker
<b>Built-in Wi-Fi</b>	2.4 Ghz, 802.11b/g/n
<b>MicroSD Storage</b>	Up to 256 GB
<b>Range of Motion</b>	Pan 0° - 360°, Tilt 0° - 90°, Rotate 0° - 360°
<b>Power</b>	12V DC, PoE
<b>Product QR Code</b>	

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories

## Enterprise Level DVR

SKU	LTD8416M-ST(S)	LTD8432M-EA(S)	LTD8432M-ST(S)
	 		 
<b>Featuring</b>			
Analog Video Input	16 Ch (TVI / AHD / CVI / CVBS) up to 8 MP	32 Ch (HD-TVI / AHD / CVI / CVBS) up to 4 MP	32 Ch (HD-TVI / AHD / CVI / CVBS) up to 8 MP
Analog Record Rate	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	4 MP Lite @ 15 fps / 1080p @ 15 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 3 MP @ 18 fps
IPC Input	18 Ch, up to 12 MP, adjustable up to 34 Ch	16 Ch up to 6 MP, adjustable up to 48 Ch	32 Ch up to 12 MP, adjustable up to 64 Ch
Total Bandwidth	In: 160 Mbps; Out: 160 Mbps	In: 200 Mbps; Out: 160 Mbps	In: 320 Mbps; Out: 256 Mbps
Decoding Format	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264	H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 1080p, CVBS	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)
Playback Channel	16 Ch	16 Ch	16 Ch
Audio In / Out	IN: 4 lines OUT: 2 lines RCA	IN: 4 lines OUT: 1 line RCA	IN: 4 lines OUT: 1 line RCA
Alarm Channels (In / Out)	16/4	16/4	16/4
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	4 x SATA up to 12 TB each, NAS, IP SAN	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA
USB	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
PTZ Control	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard
POSs Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions (W x D x H)	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"
Product QR Code			

Professional Level DVR			
SKU	LTD8304D-ET	LTD8308D-ETC	LTD8316D-ET
	 	 	 
<b>Featuring</b>			
<b>Video Input</b>	4 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP	8 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP	16 Channels (TVI / AHD / CVI / CVBS / IP), up to 4 MP
<b>Analog Record Rate</b>	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps
<b>IPC Input</b>	Standard Mode: 1 channel (up to 5)  Enhanced IP Mode: 2 channels (up to 6) @ up to 4 Mbps each. Up to 6 MP	Standard Mode: 2 channels (up to 10)  Enhanced IP Mode: 4 channels (up to 12) @ up to 4 Mbps each. Up to 6 MP	8 channels (up to 24) @ up to 4 Mbps each, up to 6 MP
<b>Total Bandwidth</b>	72 Mbps	96 Mbps	128 Mbps
<b>Video Output</b>	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	HDMI (4k) / VGA up to 1080P
<b>Decoding Format</b>	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264
<b>Deep Learning Support</b>	Human / Vehicle Detection, or 2 ch. of Human/Vehicle Detection VCA, or 1 ch. Facial Recognition, or 2 ch. Direct-Search	Human / Vehicle Detection, or 4 ch. Human/Vehicle Detection VCA, or 2 ch. Facial Recognition, or 4 ch. Direct-Search	Human / Vehicle Detection, or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search
<b>Playback Channel</b>	4 Ch	8 Ch	16 Ch
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line RCA 4, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 8, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 16, coaxial cable (input)
<b>Alarm Channels (In / Out)</b>	-	-	-
<b>Network Interface</b>	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
<b>Storage</b>	1 x SATA up to 10 TB	1 x SATA up to 10 TB	2 x SATA up to 12 TB each
<b>PTZ Control</b>	RS485	RS485	RS485
<b>USB</b>	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0
<b>Dimensions (W x D x H)</b>	12.6 x 9.3 x 1.9"	12.4 x 9.5 x 1.9"	15.1 x 12.5 x 2.0"
<b>Product QR Code</b>			

## Professional Level DVR

SKU	LTD8504D-ST	LTD8508D-STC	LTD8516D-ST
	  	  	  
<b>Featuring</b>	   	   	   
<b>Video Input</b>	4 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP	8 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP	16 Channels (TVI / AHD / CVI / CVBS / IP), up to 8 MP
<b>Analog Record Rate</b>	1st ch. up to 8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps
<b>IPC Input</b>	Standard Mode: 2 channels (up to 6) Enhanced IP Mode: 4 channels (up to 8) @ up to 4 Mbps each Up to 8 MP	8 channels (up to 16) @ up to 4 Mbps each, up to 8 MP	16 channels (up to 32) @ up to 4 Mbps each, up to 8 MP
<b>Total Bandwidth</b>	96 Mbps	128 Mbps	128 Mbps
<b>Video Output</b>	HDMI (2k) / VGA up to 1080P	HDMI (4k) / VGA up to 1080P	HDMI (4k) / VGA up to 1080P
<b>Decoding Format</b>	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264	H.265 Pro+/H.265 Pro/ H.265/H.264+/H.264
<b>Deep Learning Support</b>	Human / Vehicle Detection, or 4 ch. Human/Vehicle Detection VCA, or 2 ch. Facial Recognition, or 4 ch. Direct-Search	Human / Vehicle Detection, or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search	MD, 2.0 or 8 ch. Human/Vehicle Detection VCA, or 4 ch. Facial Recognition, or 8 ch. Direct-Search
<b>Playback Channel</b>	4 Ch	8 Ch	16 Ch
<b>Audio In / Out</b>	IN: 1 line OUT: 1 line RCA 4, coaxial cable (input)	IN: 1 line OUT: 1 line RCA 8, coaxial cable (input)	IN: 4 line OUT: 1 line RCA 16, coaxial cable (input)
<b>Alarm Channels (In / Out)</b>	-	-	-
<b>Network Interface</b>	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
<b>Storage</b>	1 x SATA up to 10 TB	1 x SATA up to 12 TB	2 x SATA up to 12 TB each, NAS, IP SAN
<b>PTZ Control</b>	RS485	RS485	RS485
<b>USB</b>	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
<b>Dimensions (W x D x H)</b>	12.4 x 9.5 x 1.8"	12.4 x 9.5 x 1.8"	15 x 12.6 x 1.9"
<b>Product QR Code</b>			

# Invest in Care, Skip the Repair



With powerful strobe lights, and two-way audio, TVI cameras are proactive against break-ins, significantly minimizing the need for costly property repairs. TVI cameras require compatible DVR models for MD 2.0 Human/Vehicle Detection.

## Active Deterrence



This camera flashes red and blue strobe lights to deter intruders once they enter the detection zone proactively.

## Two-Way Audio



If you encounter loiterers or personnel, you can use the two-way speakers to communicate and discourage access.

## 180° Coverage



In addition to the strobe lights, these cameras have 180° coverage to monitor every angle—because total awareness means total protection.

## VCA with Human & Vehicle Detection



When paired with compatible DVRs, our cameras deliver enhanced detection accuracy—effectively distinguishing between relevant and irrelevant motion to minimize false alarms.

**Color 24/7 HD-TVI Cameras**

SKU	CMHT1722NW-28CF	CMHT1752W-28CF	CMHT1782W-28CF	CMHT3C5PW-28L											
															
<b>Featuring</b>				  											
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	5 MP, 3328 x 1504 @ 20 fps											
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2 x 2.8 mm, Fixed											
Min. Illumination	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F 1.0, AGC ON, 0 Lux with suppl. light											
Supplemental Lighting	White LEDs up to 131 ft	White LEDs up to 65 ft	White LEDs up to 130 ft	IR and White light up to 131 ft											
Special Features	Color 24/7	Color 24/7	Color 24/7	Color 24/7, Hybrid Illumination											
WDR	WDR 130 dB	WDR 130 dB	WDR 130 dB	WDR 130 dB											
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI	TVI											
Audio In/Out	-	-	-	Built-in Mic											
Protection	IP67	IP67	IP67	IP67											
Power	12V DC	12V DC	12V DC	12V DC											
Product QR Code															
Compatible Accessories	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5\"	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5\"	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5\"	 LTB342-140 Wall Mount	 LTB701 Junction Box	
	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount						

\*Please note CMHT3C5PW-28L requires LTD83D or LTD85D Series DVR with latest firmware to work.

**Turret Fixed Lens HD-TVI Cameras**

SKU	CMHT2122-28LF	CMHT1722-28LS	CMHT1722WE-28F									
		 										
<b>Featuring</b>			   									
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps									
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed									
Min. Illumination	0.02 Lux @ F2.2	0.01 Lux @ F1.6	0.003 Lux @ F1.2									
Supplemental Lighting	IR/White Light up to 65 ft	IR/White Light up to 130 ft	Matrix IR up to 197 ft									
Special Features	Hybrid Illumination	Hybrid Illumination, Active Deterrence with Red & Blue Strobe Light & Siren	-									
WDR	DWDR	DWDR	WDR 130 dB									
Output	TVI / AHD / CVI / CVBS Switchable	TVI	TVI / AHD / CVI / CVBS Switchable									
Audio In / Out	-	Built-in Mic & Speaker	-									
Protection	IP67	IP67	IP67									
Power	12V DC	12V DC	12V DC									
Product QR Code												
Compatible Accessories	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB345 Junction Box	 LTB342-110T Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB03-W Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB301 Wall Mount	 LTB03-W Junction Box
					 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB307 Junction Box	 LTB371 Pendant Mount 21.5" (55cm)	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB307 Junction Box	 LTB371 Pendant Mount 21.5" (55cm)		

\*Please note CMHT1722-28LS only works with compatible DVR models.

Turret Fixed Lens HD-TVI Cameras

SKU	CMHT2152-28LFA	CMHT1752WE-28F	CMHT1782-28LF	CMHT1752-28LS										
														
<b>Featuring</b>	 			   										
Max. Resolution	5 MP, 2960 x 1665 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	5MP, 2960x1665 @ 25 fps										
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm	2.8mm, Fixed										
Min. Illumination	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.6	0.01 Lux @ F1.6										
Supplemental Lighting	IR up to 100 ft, White Light up to 66 ft	Matrix IR up to 200 ft	IR up to 130 ft, White Light up to 66 ft	IR/White Light up to 130 ft										
Special Features	Hybrid Illumination	-	Hybrid Illumination	Hybrid Illumination, Active Deterrence with Red & Blue Strobe Light and Siren										
WDR	DWDR	WDR 130 dB	DWDR	DWDR										
Output	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI / AHD / CVI / CVBS Switchable	TVI										
Audio In / Out	Built-in Mic	-	-	Built-in Mic & Speaker										
Protection	IP67	IP67	IP67	IP67										
Power	12V DC	12V DC	12V DC	12V DC										
Product QR Code														
Compatible Accessories	 LTB345 Junction Box	 LTB342-110T Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount
	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount			

**Bullet Fixed Lens HD-TVI Cameras**

<b>SKU</b>	CMHR9252WE-28F
	 Junction Box Included
<b>Featuring</b>	
Max. Resolution	5 MP, 2560 x 1944 @ 20 fps
Lens	2.8 mm, Fixed
Min. Illumination	0.003 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 200 ft
Special Features	-
WDR	WDR 130 dB
Output	TVI / AHD / CVI / CVBS Switchable
Protection	IP67
Power	12V DC
Product QR Code	
Compatible Accessory	 LTB345 Junction Box

**Dome Vari-focal Lens HD-TVI Cameras**

<b>SKU</b>	CMHD3453D-ZFN		
	 		
<b>Featuring</b>			
Max. Resolution	5 MP, 2560 x 1944 @ 20 fps		
Lens	2.7 - 13.5 mm, Motorized		
Min. Illumination	0.01 Lux @ F1.2		
Supplemental Lighting	Matrix IR up to 130 ft		
Special Features	-		
WDR	DWDR		
Output	TVI / AHD / CVI / CVBS Switchable		
Protection	IP67, IK10		
Range of Motion	3-Axis		
Power	12V DC, 24V AC		
Product QR Code			
<b>Compatible Accessories</b>	<b>Compatible with All Cameras Above</b>		
	 LTB342-140 Wall Mount for CMHD3523DWE	 LTB342-JBOX Junction Box for Wall Mount LTB342-140	 LTB340 In-Ceiling Mount for CMHD3523DWE
	 LTB453 Junction Box for CMHD3453D-ZFN	 LTB378 Pole Mount	 LTB379 Corner Mount

## Smarter Access Control, Simplified



### UL 294 Certified




Our access control solutions are UL 294 certified, ensuring compliance with rigorous safety, performance, and reliability standards.

### User-Level Access Management



Set the right access for the right people. Customize permissions by role to keep your system secure, organized, and easy to manage.

### Mobile & Web Application

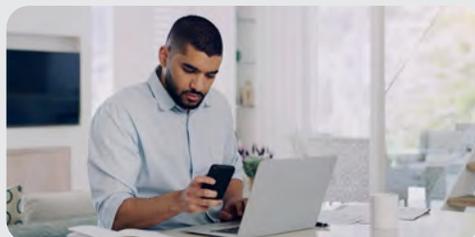

Our platform delivers seamless system control across web and mobile environments, enabling real-time monitoring, configuration, and event management from virtually anywhere.

### Built-in PoE and Wi-Fi Capabilities




Integrated PoE and Wi-Fi capabilities enable flexible installations with fewer components, minimizing infrastructure requirements and reducing overall deployment costs.

**Defendas Sentinel Series**

SKU	ST200B ST400B	ST10-MEK	ST902-MEK	ST-ENROLL
				
Key Features	<ul style="list-style-type: none"> <li>• 2- and 4-door options</li> <li>• Scalable system design: connect up to 21 controllers (1 primary + 20 secondary) to manage up to 84 doors</li> <li>• Integrated web-based management platform</li> <li>• Communication supported via Wiegand and RS-485</li> <li>• Flexible verification options: card, password, and QR code</li> <li>• PoE delivers both power and data through one cable</li> <li>• Built-in Wi-Fi connectivity</li> <li>• Tamper-proof alarm functionality</li> <li>• Sleek black metal enclosure</li> <li>• UL294 Certified</li> </ul>	<ul style="list-style-type: none"> <li>• Rugged IP66 and IK07 protection</li> <li>• Multiple access options: card, PIN, or QR code</li> <li>• Wiegand and RS485 (OSDP) for seamless system integration</li> <li>• Compatible with 125kHz (EM) and 13.56MHz (Mifare) cards</li> <li>• Bluetooth-enabled for convenient setup and configuration via app</li> <li>• NFC tap-to-unlock support</li> <li>• Fast QR-code scanning for quick entry</li> <li>• Responsive touch keypad for PIN entry</li> <li>• Built-in tamper alarm for added security and protection</li> <li>• UL294 Certified</li> </ul>	<ul style="list-style-type: none"> <li>• Built with IP65-rated weather protection for reliable outdoor use</li> <li>• Flexible access options: card or PIN</li> <li>• Supports Wiegand and RS-485 (OSDP) for easy integration</li> <li>• Compatible with both 125 kHz (EM) and 13.56 MHz (MIFARE) cards</li> <li>• Enhanced security with a built-in tamper alarm</li> </ul>	<ul style="list-style-type: none"> <li>• Quick USB Plug-and-Play Enrollment Reader for EM (125 kHz) and MIFARE (13.56 MHz) Cards</li> <li>• Enhanced user-friendly operation with visual (LED) and audio (beep) feedback</li> </ul>
Product QR Code	<p>ST200B </p> <p>ST400B </p>			

NVR  
IP Cameras  
DVR  
TVI  
Defendas  
Intercom + AC  
Accessories

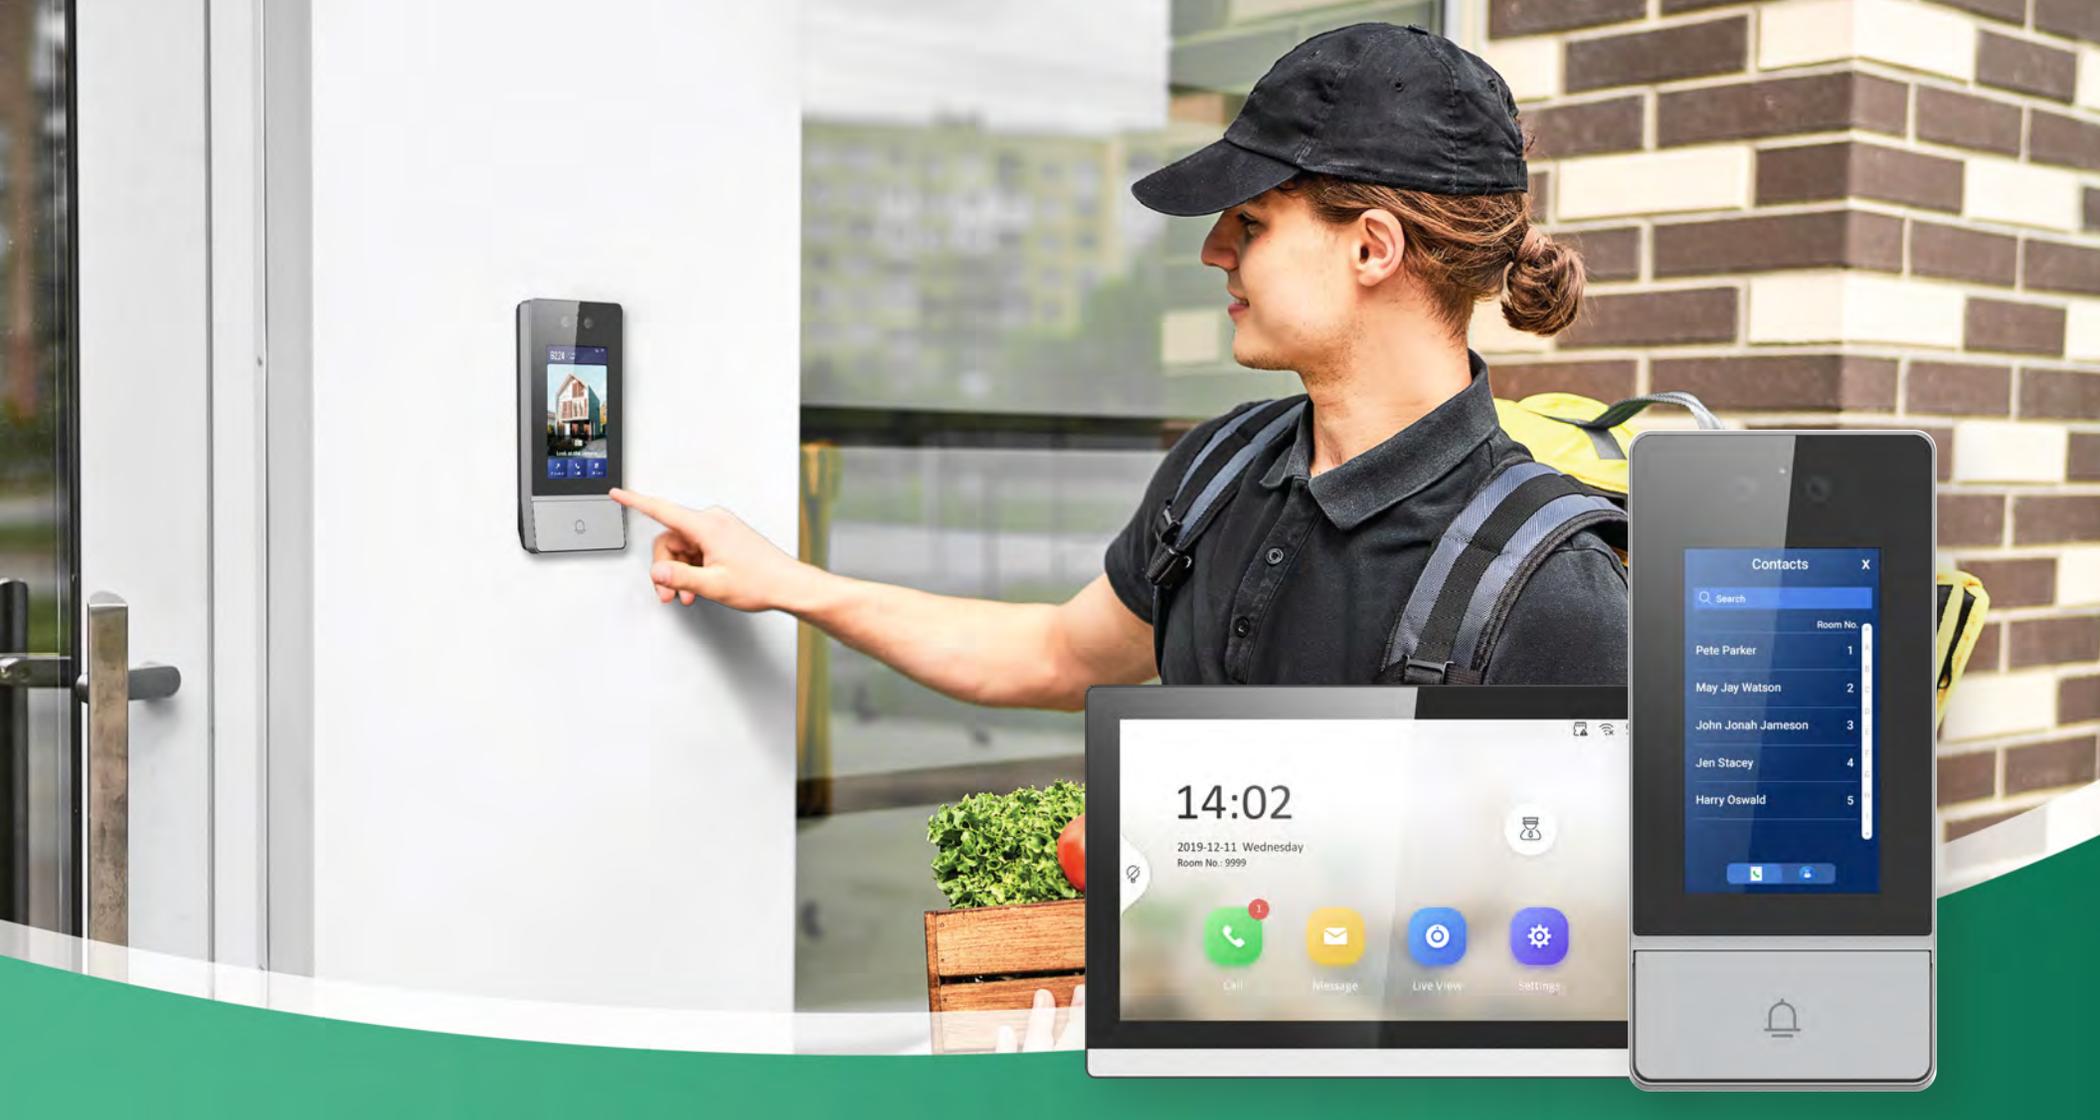

Download LTS Connect App on



Apple Store



Google Play



Download X-VMS App on



Apple Store



Google Play

# Intercom and Access Control


Scalable Entrance Security Solutions

IP Intercom Outdoor Station				
LTH-303M-WIFI	LTH-302M-PS	LTH-401M-WIFI	LTH-401M-PS	LTK3411MF
 <b>Door Station with WDR 2 MP IPC</b> <ul style="list-style-type: none"> <li>• Compact 4.7" x 2.2" x 0.8"</li> <li>• MIFARE Reader Calling Button</li> <li>• Single Office Application, Call App Directly</li> <li>• PoE or TCP / IP with 12V DC, IP65</li> </ul> 	 <b>Protective Shield</b> <ul style="list-style-type: none"> <li>• 5.90" x 3.13" x 1.91"</li> <li>• Polycarbonate</li> <li>• Compatible with LTH-301M-WIFI, LTH302M-WIFI and LTH303M-WIFI</li> <li>• Surface Mount</li> </ul> 	 <b>IP Door Station with Contact List</b> <ul style="list-style-type: none"> <li>• 7.16" x 3.33" x 1.01"</li> <li>• Contact List Function</li> <li>• Supports up to 500 Contacts</li> <li>• 4" Touchscreen</li> <li>• Large Physical Call Button</li> <li>• Face, Card, Key fob, and Code Entry</li> <li>• PoE or 12V DC with Wi-Fi</li> <li>• IP65, IK8 Vandal-resistant</li> </ul> 	 <b>Protective Shield</b> <ul style="list-style-type: none"> <li>• 7.43" x 3.82" x 1.93"</li> <li>• Electro-Galvanized Steel Sheets</li> <li>• Compatible with LTH-401M-WIFI</li> <li>• Surface Mount</li> </ul> 	 <b>4" Touchscreen Door Station</b> <ul style="list-style-type: none"> <li>• 6.79" x 3.27" x 0.89"</li> <li>• Facial, Card, QR Code, and PIN</li> <li>• For Single Office: 1 Click Call App</li> <li>• For Multi-Tenant: Supports up to 500 Apartment Units</li> <li>• Add Indoor Station for App Access</li> <li>• IP65</li> <li>• TCP / IP, 12V DC</li> <li>• Add LTK-AQE30E for PoE</li> <li>• Secure module LTH-SM1 via RS-485</li> </ul> 


IP Intercom Indoor Station		Management Software Options		
LTH-D311GY-WIFI	LTH-D311-DESK	NVMS V3 PC Software + LTS Connect App	X-VMS VMS Windows Software + X-VMS App	LTKE100ME
 <b>IP Video Indoor Station</b> <ul style="list-style-type: none"> <li>• 7" Touch Screen</li> <li>• New Design</li> <li>• NVMS V3 PC</li> <li>• Allows App Access for Door Stations</li> <li>• PoE, 12V DC, Wi-Fi</li> <li>• Up to 17 per Office</li> </ul> 	 <b>Desk Stand</b> <ul style="list-style-type: none"> <li>• Designed for LTH-D311GY-WIFI</li> </ul> 	 <b>Manage Surveillance, Access Control and Intercom</b> <ul style="list-style-type: none"> <li>• Only 1 PC for Access Control Purposes</li> <li>• LTS Connect App Supports Single Door Controllers and Intercom</li> <li>• Answer and Unlock Doors via App</li> <li>• Up to 256 Video and 50 Door Channels</li> <li>• Time Attendance, E-Map</li> </ul> 	 <b>VMS for LTS Surveillance, Access Control and Intercom</b> <ul style="list-style-type: none"> <li>• Supports Multiple Users from Different Computers and Smartphones</li> <li>• Controls Multi-Door and Single Door Controllers and Intercom</li> <li>• Project-based Pricing</li> <li>• Web for Config, Software for Operation</li> </ul> 	 <b>LTS MIFARE USB Issuer</b> <ul style="list-style-type: none"> <li>• Supports Both NVMS and X-VMS</li> <li>• Easy Enrolling Cards at Client PC</li> <li>• UL Listed</li> </ul> 

Multi-Door Controller	Card Readers for LTS Controllers				MIFARE Credentials		
LTK2802 LTK2804	LTK1107M	LTK1107MK	LTK1108M	LTK1108MK	LTKC1356M	LTKF1356M	LTKF1356M-T
	 	 	 	 	 	 	 
<b>LTS 2 Door Controller</b> <ul style="list-style-type: none"> <li>• Secure Metal Closure with Lock</li> <li>• Supports 4 Wiegand 26 / 34 bit Readers</li> <li>• Up to 10,000 Cards and 50,000 Events</li> <li>• Built-in 12V DC 8.5A Power Supply</li> </ul> 	<b>LTS 4 Door Controller</b> <ul style="list-style-type: none"> <li>• Secure Metal Closure with Lock</li> <li>• Supports 4 Wiegand 26 / 34 bit Readers</li> <li>• Up to 10,000 Cards and 50,000 Events</li> <li>• Built-in 12V DC 8.5A Power Supply</li> </ul> 		<b>LTS Slim Reader</b> <ul style="list-style-type: none"> <li>• Wiegand 26 / 34</li> <li>• MIFARE Classic</li> <li>• IP65</li> <li>• -K includes Keypad</li> </ul>	<b>LTS Single Gang Reader</b> <ul style="list-style-type: none"> <li>• Wiegand 26 / 34</li> <li>• MIFARE Classic</li> <li>• IP65</li> <li>• -K includes Keypad</li> </ul>	<b>LTS MIFARE Card</b> <ul style="list-style-type: none"> <li>• 13.56 MIFARE Classic</li> <li>• 8- and 10-Digit # Printed</li> </ul>	<b>LTS MIFARE Key Fob</b>	<b>LTS MIFARE Thick Key Fob</b>

### Alarm Controls and Securiton Maglocks and Accessories

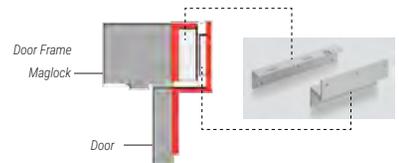LTK-600S	LTK-1200S	LTK-600WP	LTK-1200WP	LTK-600D	LTK-1200D	LTK-AM3370	LTK-AM6370
							
<ul style="list-style-type: none"> <li>• Alarm Controls Maglock</li> <li>• 600lb / 1,200lb Holding Force, UL294 and UL10C</li> <li>• Add AM3370 / 6370 if Door Opens Inwards</li> </ul>		<ul style="list-style-type: none"> <li>• Alarm Controls Waterproof Maglock</li> <li>• 600lb / 1,200lb, Swinging or Sliding Gate</li> <li>• Add AM3370 / 6370 as Gate Bracket</li> </ul>		<ul style="list-style-type: none"> <li>• Alarm Controls Double Door Maglock</li> <li>• 600lb / 1,200lb Holding Force, UL294 and UL10C</li> <li>• Add AM3375 / 6375 or 2 x AM3370 / 6370 if Door Opens Inwards</li> </ul>		<ul style="list-style-type: none"> <li>• Alarm Controls LZ Bracket</li> <li>• For Mounting Maglocks onto Inward Swinging Doors</li> <li>• AM3370 for 600 Series and AM6370 for 1200 Series</li> </ul>	

### Add Two Means of Egress to Your Maglock Installation

LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-NTS-1	LTK-TS-14	LTK-TS-60	LTK-SREX-100	LTK-XMS	LTK-REB-1
								
<ul style="list-style-type: none"> <li>• Alarm Controls Green Push Button</li> <li>• 2" sq. Illuminated "Push to Exit," UL294 Listed</li> <li>• TS-2 is SPDT; TS-2-2 is DPDT; TS-2T is SPDT with 2 - 4 sec. Timer</li> </ul>		<ul style="list-style-type: none"> <li>• Alarm Controls No Touch Sensor with 1 - 3 sec. Timer</li> <li>• Single Gang Stainless Steel Wall Plate, SPDT</li> </ul>	<ul style="list-style-type: none"> <li>• Alarm Controls Pushbutton with 2 - 60 sec. Pneumatic Timer, UL294 Listed</li> <li>• 1.5" Large Green / 2.5" Extra Large Red Mushroom Button "Push To Exit", SPDT</li> </ul>	<ul style="list-style-type: none"> <li>• Alarm Controls Focused RTE Motion Sensor</li> <li>• DPDT, UL294 Listed</li> </ul>	<ul style="list-style-type: none"> <li>• Securiton Adjustable Pattern RTE Motion Sensor</li> <li>• NC only, UL294 Listed</li> </ul>	<ul style="list-style-type: none"> <li>• Alarm Controls Pushbar &amp; Door Loop, DPDT</li> <li>• 34.5" Request to Exit Pushbar, 18" Door Loop Included</li> </ul>		

### Get a Certified Power Supply that Can Integrate with Fire Alarm Systems


LTK-AQD4-4C1R1	LTK-AQD6-8C8R2	LTK-AQL6-B100R8E1
		
12 or 24V DC 4A with 4 PTC Output	12 or 24V DC 6A with 8 PTC Output	12 and 24V DC 6A with 8 Fuse Output
<ul style="list-style-type: none"> <li>• Securiton AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty</li> <li>• Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered</li> </ul>		<ul style="list-style-type: none"> <li>• UL294, UL603, ULC-S318, ULC-S533 Listed; RoHS Compliant and REACH Compliant</li> </ul>


\*All HES, Securiton, Adams Rite and Alarm Controls products are available to order through LTS.

\*Batteries are NOT included for AQD Power Supplies.

## Select Electrical Strikes According to Existing Door Hardware

### Electrical Strike for Cylindrical Latch

LTK-5000C-630	LTK-8000C-630	LTK-AES-300-12	LTK-AES-300-24
			
<ul style="list-style-type: none"> <li>• HES 5000 Strike with 501 and 501A Faceplates</li> <li>• ANSI Metal Jambos or Aluminum Frames</li> <li>• Dual Voltage 12V DC / 24V AC, UL1034, UL294 Listed</li> <li>• Satin stainless steel</li> </ul>	<ul style="list-style-type: none"> <li>• HES 8000 Strike with 801 and 801A Faceplates</li> <li>• Easy Installation with No Cutting on ANSI Frames</li> <li>• Dual Voltage 12V DC / 24V DC, UL1034, UL294 Listed</li> <li>• Satin stainless steel</li> </ul>	<ul style="list-style-type: none"> <li>• AES-300 Strike with All Faceplates Included</li> <li>• Ultra Compact for Minimum Cutting on Wood Frames</li> <li>• 300-12 12V DC/AC; 300-24 24V DC/AC, UL1034 Listed</li> </ul>	

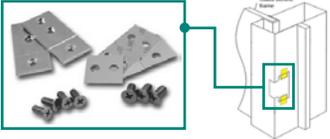For Mortise Latch:	Mounting Tabs for Storefront	Change Deadbolt to Mortise Latch on Storefront	
LTK-1500C-630	LTK-152	LTK-4900-25-628	LTK-4900-26-628
			
<ul style="list-style-type: none"> <li>• HES 1500 Strike with 1J, 1K, 1KD and 1KM Faceplates</li> <li>• Stainless Steel Construction with 10-Year No-Fault Warranty</li> <li>• Dual Voltage 12V DC / 24V DC, UL294, UL10C 3 Hours</li> <li>• Satin stainless steel</li> </ul>	<ul style="list-style-type: none"> <li>• HES 152: Universal Mounting Tabs</li> <li>• Mount Inside Hollow Metal and Aluminum Jambos</li> <li>• Compatible with 5000, 8000, 7400, 1500, 1600 and More</li> </ul>	<ul style="list-style-type: none"> <li>• Adams Rite Mortise Latch, Clear Anodized Finish</li> <li>• Drop-in Replacement for Many Deadbolt and Hook Bolt Locks</li> <li>• 31" / 32" Backset, -25 LH or RHR, -26 RH or LHR</li> <li>• Satin stainless steel</li> </ul>	

### For RIM Exit Devices (Push Bar):

LTK-9400-630	LTK-9600-630	LTK-9500-630
		
<ul style="list-style-type: none"> <li>• HES 9000 Series Slim-line Strike</li> <li>• Surface Mounted, No Cutting Needed</li> <li>• For 1/2" Pullman Latch • UL294 Listed</li> <li>• Satin stainless steel</li> </ul>	<ul style="list-style-type: none"> <li>• HES 9000 Series Slim-line Strike</li> <li>• Surface Mounted, No Cutting Needed</li> <li>• For 3/4" Pullman Latch • UL294 Listed</li> <li>• Satin stainless steel</li> </ul>	<ul style="list-style-type: none"> <li>• HES 9000 Series Slim-line Strike</li> <li>• Surface Mounted, No Cutting Needed</li> <li>• For 3/4" Pullman Latch • UL294, UL10C 3 Hours Fire Rated</li> <li>• Satin stainless steel</li> </ul>

\*All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS. Please call sales for other HES finish colored models.

NVR

IP Cameras

DVR

TVI

Defendas

Intercom + AC

Accessories



**airMAX<sup>®</sup>**



SERVICE CODE :  
UBNT-SERVICE

# Accessories

---

\*airMAX® setup service available for \$25 per unit

**airMAX® Wireless** **UniFi® Wifi**

<b>LTU 5GHz</b>		 <b>UBNT-NSM5</b> Indoor/Outdoor airMAX 5GHz CPE.	 <b>UBNT-U7-PRO</b> Ceiling-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support for interference-free WiFi in demanding, large-scale environments.	 <b>UBNT-U6-IW</b> Wall-mounted WiFi 6 AP with 6 spatial streams and a built-in 4-port switch ideal for single-room coverage in hospitality environments.
 <b>UBNT-LTU-LR</b> 5 GHz PtMP LTU Long-Range Client, functions in a PtMP environment with the LTU-Rocket as the BaseStation.	 <b>UBNT-LAP-120</b> Ultra-lightweight, 5GHz access point with a versatile, ball-joint mount	 <b>UBNT-NBE-5AC-GEN2</b> Compact, UISP-ready, 5GHz WiFi bridge with enhanced surge protection and an optimized radio and antenna.	 <b>UBNT-U7-PRO-MAX</b> <span style="color: red; font-weight: bold;">NEW</span> Ceiling-mounted WiFi 7 AP with 8 spatial streams, 6 GHz support, and a dedicated spectral scanning engine for interference-free WiFi in demanding, large-scale environments.	 <b>UBNT-U6-ENTERPRISE-IW</b> Wall-mounted WiFi 6E AP with 10 spatial streams, 6 GHz support, and a built-in 4-port switch. Designed for high-density office networks.
 <b>UBNT-LTU-PRO</b> 5 GHz PtMP LTU Client with advanced RF performance, functions in a PtMP environment with the LTU-Rocket as the BaseStation.	 <b>UBNT-PBE-5AC-GEN2</b> High-performance 5GHz Point-to-Point (PtP) bridge with integrated dish reflector.	 <b>UBNT-IS-5AC</b> Compact, UISP-ready, 5GHz WiFi bridge with enhanced surge protection and an interchangeable horn antenna.	 <b>UBNT-U7-OUTDOOR</b> <span style="color: red; font-weight: bold;">NEW</span> All-weather WiFi 7 AP with 4 spatial streams, an integrated directional super antenna, and versatile mounting options.	 <b>UBNT-U6-LR</b> Ceiling-mounted WiFi 6 AP with 8 spatial streams and extended signal range.
 <b>UBNT-LTU-ROCKET</b> 5 GHz PtMP LTU BaseStation Radio, functions in a PtMP environment using the LTU Pro, LTU Lite, or LTU LR as Clients.	 <b>UBNT-R5AC-LITE</b> airMAX AC Technology for up to 500+ Mbps throughput.	 <b>UBNT-LBE-5AC-GEN2</b> Ultra-lightweight design with proprietary airMAX ac chipset and dedicated management WiFi for easy UISP mobile app support and fast setup.	 <b>UBNT-U7-PRO-WALL</b> <span style="color: red; font-weight: bold;">NEW</span> Wall-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support tailored for home builders with seamless installation options.	 <b>UBNT-U6-ENTERPRISE</b> Ceiling-mounted WiFi 6E AP with 10 spatial streams and 6 GHz support to provide seamless, multi-band coverage within high client density environments.
<b>airMAX 5GHz</b>		 <b>UBNT-RD-5G30</b> 5 GHz, 30 dBi or 34 dBi high-performance dish antenna.	 <b>UBNT-U7-LITE</b> <span style="color: red; font-weight: bold;">NEW</span> Wall-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support tailored for home builders with seamless installation options.	 <b>UBNT-UAP-AC-M</b> Compact, indoor/outdoor WiFi 5 AP with 4 spatial streams and optional external antenna support for directional coverage.
 <b>UBNT-LOC05AC</b> Compact, UISP-ready WiFi radio sporting a classic NanoStation design and an updated airMAX AC chipset.	 <b>UBNT-RP-5AC-GEN2</b> High-performance 5GHz base station for PtMP or PtP links. Provides up to 500+ Mbps data throughput.	 <b>UBNT-LOCOM5</b> Low-cost and efficient broadband 5GHz CPE.	 <b>UBNT-U7-IW</b> <span style="color: red; font-weight: bold;">NEW</span> Wall-mounted WiFi 7 AP with 4 spatial streams and an integrated 2.5 GbE PoE switch designed for hospitality environments. Note: PoE+ input required for single-port PoE output.	 <b>UBNT-UAP-AC-PRO</b> Ceiling-mounted WiFi 5 AP with 6 spatial streams designed for large offices.
 <b>UBNT-LBE-5AC-GEN2</b> Ultra-lightweight design with proprietary airMAX ac chipset and dedicated management WiFi for easy UISP mobile app support and fast setup.	<b>Antennas and Accessories</b>		 <b>UBNT-U6+</b> Compact, ceiling-mounted WiFi 6 AP with 4 spatial streams that improves upon the U6 Lite with higher performance and dual-band WiFi 6 support. Ideal for small and medium-sized businesses.	 <b>UBNT-UAP-AC-HD</b> Ceiling-mounted WiFi 5 AP with 8 spatial streams designed to support high-density networks and critical system applications.
 <b>UBNT-LOC05AC</b> Low-cost and efficient broadband 5GHz CPE.	 <b>UBNT-AM0-5G10</b> 5 GHz, 10 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.	 <b>UBNT-NS-WM</b> Window mount for NanoStationM airMAX devices.	 <b>UBNT-U6-PRO</b> Ceiling-mounted WiFi 6 AP with 6 spatial streams designed for large offices.	 <b>UBNT-UAP-AC-SHD</b> Ceiling-mounted WiFi 5 AP with 8 spatial streams designed to support high client density environments.
 <b>UBNT-NBE-M5-16</b> High-performance 5GHz, 16 dBi bridge.	 <b>UBNT-AM0-5G13</b> 5 GHz, 13 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.	 <b>UBNT-ACB-ISP</b> Low-cost home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	 <b>UBNT-U6-MESH</b> Sleek, indoor/outdoor WiFi 6 AP with 6 spatial streams designed for mesh applications.	 <b>UBNT-UBB</b> A 60 GHz wireless point-to-point bridge with 10G SFP+ uplink for maximum performance.
 <b>UBNT-ETH-SP-G2</b> ESD protection for outdoor high-speed networks.		 <b>UBNT-ACB-AC</b> High-performance home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	 <b>UBNT-U6-MESH-PRO</b> Indoor/outdoor WiFi 6 AP with 4 spatial streams, an integrated super antenna, and a gigabit passthrough port.	 <b>UBNT-UBB-XG</b> A 60 GHz wireless point-to-point bridge.
 <b>UBNT-UB-AM</b> Universal mounting bracket for wall-mount flexibility.				

\*All Ubiquiti products are available to order through LTS

NVR | IP Cameras | DVR | TVI | Defendas | Intercom + AC | Accessories


**UniFi® Cloud Gateways**

	<b>UBNT-UDM-PRO-MAX</b> 10G Cloud Gateway with 200+ UniFi device / 2,000+ client support, 5 Gbps IPS routing, and redundant NVR storage.
	<b>UBNT-UDM-PRO</b> 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support and 3.5 Gbps IPS routing.
	<b>UBNT-UDM-SE</b> 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support, 3.5 Gbps IPS routing, and built-in PoE switching.
	<b>UBNT-UX</b> Impressively compact UniFi Cloud Gateway and WiFi 6 access point that runs UniFi Network. Powers an entire network or simply meshes as an access point.
	<b>UBNT-UCG-MAX</b> Compact 2.5G Cloud Gateway with 30+ UniFi device / 300+ client support, 2.3 Gbps IPS routing, and selectable NVR storage.
	<b>UBNT-UCG-ULTRA</b> Compact Cloud Gateway with 30+ UniFi device / 300+ client support, 1 Gbps IPS routing, and multi-WAN load balancing.

**UniFi® CloudKeys Gateways**

	<b>UBNT-UXG-LITE</b> A compact and powerful UniFi gateway with a full suite of advanced routing and security features.
	<b>UBNT-UXG-PRO</b> Multi-WAN independent gateway designed to protect large-scale networks with a full suite of advanced routing and security features.
	<b>UBNT-UCK-G2-SSD</b>  Compact UniFi Console that connects directly to the Site Manager at <a href="https://unifi.ui.com/">https://unifi.ui.com/</a> for powerful, multi-application site management. Pre-installed 1TB SSD

**UniFi® PoE Switching**

	<b>UBNT-USW-ENTERPRISE-48-POE (720W)</b> <b>UBNT-USW-ENTERPRISE-24-POE (400W)</b> <b>UBNT-USW-ENTERPRISE-8-POE (120W)</b> A 48 / 24 / 8-port, Layer 3 switch with 2.5 GbE PoE+ output.
	<b>UBNT-USW-PRO-MAX-48-POE (720W)</b> <b>UBNT-USW-PRO-MAX-24-POE (400W)</b> <b>UBNT-USW-PRO-MAX-16-POE (180W)</b> A 48 / 24 / 16-port, Layer 3 Etherlighting™ switch with 2.5 GbE and PoE++ output.
	<b>UBNT-USW-PRO-48-POE (600W)</b> <b>UBNT-USW-PRO-24-POE (400W)</b> <b>UBNT-USW-PRO-8-POE (120W)</b> A 48 / 24 / 8-port, Layer 3 switch capable of high-power PoE++ output.
	<b>UBNT-USW-48-POE (195W)</b> <b>UBNT-USW-24-POE (95W)</b> <b>UBNT-USW-16-POE (42W)</b> A 48 / 24 / 16-port, Layer 2 PoE switch with a silent, fanless cooling system.
	<b>UBNT-USW-LITE-16-POE (45W)</b> <b>UBNT-USW-LITE-8-POE (52W)</b> A wall-mountable, 16 / 8-port, Layer 2 PoE switch with a fanless cooling system.
	<b>UBNT-USW-FLEX (46W)</b> Flexible 5-port, Layer 2 PoE switch for indoor and outdoor use, that can be powered with PoE++.
	<b>UBNT-USW-FLEX-MINI</b> A compact, 5-port, Layer 2 switch that can be powered with PoE or a 5V USB-C adapter.
	<b>UBNT-USW-FLEX-UTILITY</b> The Switch Flex Utility is an outdoor weatherproof enclosure designed for use with the Switch Flex.

**Managed PoE Switches**

	<b>POE-SWC402G</b>  4-Port Cloud Managed Gigabit PoE Switch 	<ul style="list-style-type: none"><li>• 60 W, IEEE 802.3af/at</li><li>• 4 x Gigabit PoE RJ45 ports</li><li>• Up to 1,000 ft</li><li>• 2 x Gigabit RJ45 port</li><li>• Supports LTS Platinum Partner (LPP)</li></ul>
	<b>POE-SWC802G</b>  8-Port Cloud Managed Gigabit PoE Switch 	<ul style="list-style-type: none"><li>• 110 W, IEEE 802.3af/at</li><li>• 8 x Gigabit PoE RJ45 ports</li><li>• Up to 1,000 ft</li><li>• 2 x Gigabit RJ45 port</li><li>• Supports LTS Platinum Partner (LPP)</li></ul>
	<b>POE-SWC1601G</b>  16-Port Cloud Managed Gigabit PoE Switch 	<ul style="list-style-type: none"><li>• 230 W, IEEE 802.3af/at</li><li>• 16 x Gigabit PoE RJ45 ports</li><li>• Up to 1,000 ft</li><li>• 1 x Gigabit RJ45 port</li><li>• 1 x Gigabit fiber optical port</li><li>• Supports LTS Platinum Partner (LPP)</li></ul>
	<b>POE-SWC2401G</b>  24-Port Cloud Managed Gigabit PoE Switch 	<ul style="list-style-type: none"><li>• 370 W, IEEE 802.3af/at</li><li>• 24 x Gigabit PoE RJ45 ports</li><li>• Up to 1,000 ft</li><li>• 1 x Gigabit RJ45 port</li><li>• 1 x Gigabit fiber optical port</li><li>• Supports LTS Platinum Partner (LPP)</li></ul>

**Wireless Bridges**

	<b>LTWB-5AC-12</b> 12V DC Wireless Bridge (Up to 3 Miles)
	<b>LTWB-5AC-360</b> 360° PoE Wireless Bridge receiver with antenna (Up to 1 mile)

\*All Ubiquiti products are available to order through LTS

**Power Adapters**      **Power Supplies**      **Warning Signs**

PS120V0800	800mA, 12V DC	
PS120V1000	1000mA, 12V DC	
PS120V2000	2000mA, 12V DC	
PS120V3000	3000mA, 12V DC	
TS5-6W	5000mA, 12V DC	
PS240V1000	1000mA, 24V AC	
PS240V3000	3000mA, 24V AC	
DV-AT12015-D01	1500mA (Max), 24V AC to 12V DC	

**Passive Video Balun Tranceivers**

	<ul style="list-style-type: none"> <li>• 8 MP/4K Passive HD Video Balun</li> <li>• Compatible with HD-TVI / CVI / AHD / CVBS Cameras</li> <li>• Support 720p / 960p / 1080p / 3 MP / 5 MP / 8 MP</li> </ul>	
LTAB4020NT		
		
LTAB4030TP		

**DVR Lockboxes**

	LT-DVRLB18-18-5 LT-DVRLB21-21-8 LT-DVRLB21-24-8 LTBHWB (Wall Mount Bracket)	
---	--	--

12V DC		Rating
PS120V5-D	• 4 Ports • 5 Amps	PTC
DV-AT1207M-D09	• 9 Ports • 7 Amps	PTC
DV-AT1209A-D9P	• 9 Ports • 9 Amps	PTC
DV-AT1212A-D18P	• 18 Ports • 12 Amps	PTC
DV-AT1220A-D18P	• 18 Ports • 20 Amps	PTC
DV-RT1224A-D24	• 24 Ports • 24 Amps	PTC
DV-RT1232A-D32	• 32 Ports • 32 Amps	PTC
DV-AT1205A-D07	• 4 Ports • 5 Amps	PTC
DV-AT1209A-D9	• 9 Ports • 9 Amps	Fuse
DV-AT1212A-D18	• 18 Ports • 12 Amps	Fuse
DV-AT1210A-D07 	• 9 Ports • 10 Amps	Fuse
DV-AT1210A-D10 	• 18 Ports • 10 Amps	Fuse
DV-AT1215A-D10 	• 18 Ports • 18 Amps	Fuse
DV-AT1232A-D18	• 18 Ports • 32 Amps	Fuse
DV-AT1232A-D27	• 27 Port • 32 Amp	Fuse

24V AC		Rating
DV-AC2408A-D07	• 9 Port • 8 Amp	PTC
DV-AC2412A-D10	• 18 Ports • 12 Amps	PTC

	LTSIGNB	• 9"(W) x 11"(H)
	LTSIGNA	• 11"(W) x 18"(H)
	LTSACS-801	<ul style="list-style-type: none"> <li>• Solar Power (No Battery Needed)</li> <li>• Actively Flashing LCD</li> </ul>

**Monitor Brackets**

	LTMB1026	<ul style="list-style-type: none"> <li>• For 10" - 26" Screen Size</li> <li>• Distance to Wall 35 - 390 mm</li> <li>• Max load: 10 kg</li> </ul>
	LTMB1737	<ul style="list-style-type: none"> <li>• For 17" - 37" Screen Size</li> <li>• Distance to Wall 35 - 380 mm</li> <li>• Max load: 30kg</li> </ul>
	LTMB2655	<ul style="list-style-type: none"> <li>• For 26" - 55" Screen Size</li> <li>• Distance to Wall 7 mm</li> <li>• Max load: 50kg</li> </ul>
	LTMB3270	<ul style="list-style-type: none"> <li>• For 32" - 70" Screen Size</li> <li>• Distance to Wall 70 - 390 mm</li> <li>• Max load: 75kg</li> </ul>

Connectors			Control Cables			
	LTA1001	BNC Twist-On RG59 Male (20 pcs/pack)			<ul style="list-style-type: none"> <li>• 18AWG / 2 Conductor Access Control Wire</li> <li>• 1000 ft Stranded</li> <li>• 99.99% OFC</li> <li>• Access Control, Intercom, and Alarm</li> <li>• CMR Rated, UL Listed</li> <li>• Color: Gray</li> </ul>	
	LTA1002	BNC Male to RCA Female (20 pcs/pack)			<ul style="list-style-type: none"> <li>• 18AWG / 6 Conductor Control Wire</li> <li>• 500 ft Stranded</li> <li>• 99.99% OFC</li> <li>• CMR Rated</li> <li>• Shielded ETL</li> <li>• Color: Gray</li> </ul>	
	LTA1003	BNC Female to RCA Male (20 pcs/pack)			<ul style="list-style-type: none"> <li>• 500 ft Stranded Control Cable</li> <li>• 99.99% OFC</li> <li>• 18/4 + 22/2 + 22/4 + 22/6 Combination Cable</li> <li>• Shielded 22/6</li> <li>• ETL Rated, CMR Rated</li> <li>• Color: Yellow</li> </ul>	
	LTA1004	BNC Male to RCA Male (20 pcs/pack)		<b>Cables (HDMI, DC Power, X RJ45)</b>		
	LTA1005	BNC Coupler Female to Female (20 pcs/pack)			<ul style="list-style-type: none"> <li>• HDMI with Ethernet</li> <li>• 4.5 / 10 / 25 / 50 ft Cable</li> <li>• Hi-Speed 1080p / 3D, 100% Triple Shield 24K</li> <li>• Gold Plated with Nylon Jacket</li> </ul>	
	LTA1006	BNC Compression for RG59 (20 pcs/pack)			<ul style="list-style-type: none"> <li>• 100 ft HDMI Cable</li> <li>• Hi-Speed 1080p with USB Booster 26AWG</li> </ul>	
	LTA1007	BNC Male Crimp-on (20 pcs/pack)		<ul style="list-style-type: none"> <li>• Terminal Connector</li> <li>• 9 Terminal, DC &amp; AC</li> <li>• Connector / Splitter</li> </ul>		
	LTA1013	BNC Male to 2 BNC Female (20 pcs/pack)		<ul style="list-style-type: none"> <li>• DC Power Connector</li> <li>• LTA2017 - Male</li> <li>• LTA2013 - Female (20 pcs/pack)</li> </ul>		
	LTA1014	X RJ45 8P8C Cat5e Crimp Connector		<ul style="list-style-type: none"> <li>• DC Power Adapter Cable</li> <li>• LTA2004 - Male</li> <li>• LTA2014 - Female (20 pcs/pack)</li> </ul>		
	LTA1016	X RJ45 8P8C Cat6 Crimp Connector		<ul style="list-style-type: none"> <li>• Male / Female Pigtail</li> <li>• LTA2010 - Male</li> <li>• LTA2008 - Female</li> </ul>		
	LT-KY5E110	Enhanced Cat5e Keystone Jack	<b>CAT5e Pre-Made Cables</b>			
	LTAC2041	<ul style="list-style-type: none"> <li>• Pre-made RJ45 CAT5e Cable</li> <li>• LTAC2041 - 100 ft</li> </ul>	<b>Tools</b>			
	LTA-T203MS	<ul style="list-style-type: none"> <li>• Wire Stripper</li> <li>• Strip Wire (12 - 22 gauge) with One Pull of Trigger</li> <li>• Built-in Ruler Splicer with Auto Adjust</li> </ul>				

**Cables (Coaxial, CAT5e and CAT6 Network)**

	LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR	 	<ul style="list-style-type: none"> <li>• 1,000 ft CAT5e 99.99% OFC</li> <li>• UL Listed or ETL Listed, RoHS Compliant</li> <li>• ISO / IEC11801, ANSI / TIA-568B-C.2</li> <li>• Fluke Tested</li> <li>• CMR Rated</li> <li>• Color: White / Blue / Black</li> </ul>
	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR	 	<ul style="list-style-type: none"> <li>• 1,000 ft CAT6 99.99% OFC</li> <li>• UL Listed or ETL Listed, RoHS Compliant</li> <li>• ISO / IEC11801, ANSI / TIA-568B-C.2</li> <li>• Fluke Tested</li> <li>• CMR Rated</li> <li>• Color: White / Blue / Black / Gray / Orange</li> </ul>
	LTAC5100B-CMX LTAC6250B-CMX	 	<ul style="list-style-type: none"> <li>• 1,000 ft CAT5e / CAT6 99.99% OFC</li> <li>• ETL Listed, RoHS Compliant</li> <li>• ISO / IEC11801, ANSI / TIA-568B-C.2</li> <li>• Fluke Tested</li> <li>• Outdoor Rated, UV Resistance</li> <li>• Direct Burial</li> <li>• Color: Black</li> </ul>
	LTAC6250W-CMP LTAC6250BL-CMP LTAC6250B-CMP		<ul style="list-style-type: none"> <li>• 1,000 ft CAT6 99.99% OFC</li> <li>• UL Listed, RoHS Compliant</li> <li>• ISO / IEC11801, TIA-568-C.2</li> <li>• Fluke Tested</li> <li>• Plenum Rated, CMP</li> <li>• Color: White / Blue / Black</li> </ul>
	LTAC2040 LTAC2046		<ul style="list-style-type: none"> <li>• 1,000 ft CCA CAT5e / CAT6</li> <li>• Commercial Grade Network Cable</li> <li>• Color: White / Blue / Black</li> </ul>
	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B		<ul style="list-style-type: none"> <li>• Siamese Coaxial Cable</li> <li>• White / Black Bare Wire</li> <li>• 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2</li> <li>• 18AWG CCA Cable</li> </ul>
	LTAC2030 LTAC2032		<ul style="list-style-type: none"> <li>• Siamese Coaxial Cable</li> <li>• White / Black Bare Wire</li> <li>• 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2</li> <li>• Solid 100% 18AWG Oxygen Free Copper</li> </ul>
	LTAC2030B-CMX LTAC2032B-CMX		<ul style="list-style-type: none"> <li>• Siamese Coaxial Cable</li> <li>• Color: Black</li> <li>• Direct Burial</li> <li>• 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2</li> <li>• Solid 100% 18AWG Oxygen Free Copper</li> </ul>
	LTAC2050W / LTAC2050B LTAC2075W / LTAC2075B LTAC2100W / LTAC2100B LTAC2125W / LTAC2125B		<ul style="list-style-type: none"> <li>• Pre-made HD Siamese Cable with BNC and Power Connector</li> <li>• 50 ft / 75 ft / 100 ft / 125 ft</li> <li>• Color: White / Black</li> </ul>

**Cables (DC Power, VGA, Microphone)**

	LTA2005	<ul style="list-style-type: none"> <li>• DC Power Splitter</li> <li>• 1 Female to 2 Male</li> </ul>
	LTA2006	<ul style="list-style-type: none"> <li>• DC Power Splitter</li> <li>• 1 Male to 2 Female</li> </ul>
	LTA2011	<ul style="list-style-type: none"> <li>• DC Power Splitter</li> <li>• 1 Female to 4 Male</li> </ul>
	LTA2018	<ul style="list-style-type: none"> <li>• DC Power Splitter</li> <li>• 1 Female to 8 Male</li> </ul>
	LTA2001	<ul style="list-style-type: none"> <li>• 12" Microphone with Power Cable</li> <li>• Microphone with Amplifier</li> </ul>

**Converters, Splitters, Extenders**

	LTAH2100E	<ul style="list-style-type: none"> <li>• USB RJ45 Extender</li> <li>• 2 x USB, USB A Female</li> <li>• Plug &amp; Play</li> <li>• Cable Type: CAT5, 5E, 6, UTP</li> <li>• Extend Distance to 150 ft</li> </ul>
	LTAH014LN	<ul style="list-style-type: none"> <li>• 1 in / 4 out HDMI Splitter</li> <li>• Support HDMI 1.3 and 1080p</li> <li>• HDCP &amp; 3D Support</li> </ul>
	LTAH018L	<ul style="list-style-type: none"> <li>• 1 in / 8 out HDMI Splitter</li> <li>• 8 Identical HDMI Outputs</li> <li>• Up to 225MHz</li> <li>• Support 3D</li> </ul>
	LTAH3100E	<ul style="list-style-type: none"> <li>• VGA / Audio X RJ45 Extender</li> <li>• Video Type: VGA</li> <li>• Supports 1920 x 1440</li> <li>• 1 x Stereo Audio (R/L)</li> <li>• Extend Distance to 900 ft</li> </ul>
	LTAH1070E	<ul style="list-style-type: none"> <li>• HDMI Extender 1080p</li> <li>• Supports 1080p up to 165 ft</li> <li>• 5V DC/1A, Power Adapter included</li> </ul>
	LTAH5300T	<ul style="list-style-type: none"> <li>• HD-TVI Distributor</li> <li>• Input: 1 x HD-TVI</li> <li>• Output: 3 x HD-TVI</li> </ul>

**IDEAL Tools and Connectors** | **Power Strips and Extension Cords**

	IDEAL-85-372E IDEAL-85-377E	CAT5e / CAT6 Feed-Thru Modular Plugs			LTPE1610 LTPE1625 LTPE1650 LTPE16100		<ul style="list-style-type: none"> <li>• 10/25/50/100 ft, 16/3C SJTW Extension Cord</li> <li>• Orange Single Outlet, UL Listed</li> </ul>	
	IDEAL-30-495	FT-45™ Feed-Thru Modular Plug Crimp Tool Crimps Feed-Thru, Standard and Shielded			LTPE1225-L3 LTPE1250-L3 LTPE12100-L3		<ul style="list-style-type: none"> <li>• 25/50/100 ft, 12/3C SJTW Extension Cord</li> <li>• Yellow 6 ft Cord, Triple Outlet</li> <li>• Lighted when Power is On, UL Listed</li> </ul>	
	IDEAL-35-088	Snips with Stripping Notch			LTPE1420-3		<ul style="list-style-type: none"> <li>• 20 ft 14/3C Indoor Extension Cord</li> <li>• Orange Cord, Triple Outlet with Sliding Cover Feature, UL Listed</li> </ul>	
	IDEAL-45-074	Data T®-Cutter			LTPS0806 LTPS0812		<ul style="list-style-type: none"> <li>• 8 Outlet Power Strips</li> <li>• White, 2 / 6 / 12 ft Cord, UL Listed</li> </ul>	
	IDEAL-89-1047E	InSITE™ RG-59 BNC Compression Connectors Window Ensures Proper Cable Insertion			LTPE0606-M		<ul style="list-style-type: none"> <li>• 6 Outlet Metal Case Outlet Strips</li> <li>• Yellow, 6 ft Cord, ETL Listed</li> </ul>	
	IDEAL-30-793	OmniSeal™ PRO XL Compression Tool			LTPE0806-M		<ul style="list-style-type: none"> <li>• 8 Outlet Metal Case Outlet Strips</li> <li>• Yellow, 6 ft Cord, UL Listed</li> </ul>	
	IDEAL-33-632	LinearX@3 Compression Tool			LTPE0806-A		<ul style="list-style-type: none"> <li>• 8 Way Aluminum Alloy Case Power Bar</li> <li>• 6 ft Cord, ETL Listed</li> </ul>	
	IDEAL-45-605	PrepPRO® Coax/UTP Cable Stripper			LTPE1215-A		<ul style="list-style-type: none"> <li>• 12 Way Aluminum Alloy Case Power Bar</li> <li>• 15 ft Cord, ETL Listed</li> </ul>	

**WD Purple and Purple Pro HDDs**



WD Purple™		WD Purple® Pro Smart Video Hard Drive	
	<b>Capacity</b>   1TB, 2TB, 3TB, 4TB, 6TB, 8TB <b>Interface</b>   SATA 6 Gb/s <b>Form Factor</b>   3.5 inch <b>MTBF</b>   Up to 1 million hours <b>Warranty</b>   3 years		<b>Capacity</b>   8TB, 10TB, 12TB, 14TB, 18TB, 22TB, 24TB, 26TB <b>Interface</b>   SATA 6 Gb/s <b>Form Factor</b>   3.5 inch <b>MTBF</b>   Up to 2.5 million hours <b>Warranty</b>   5 years
<ul style="list-style-type: none"> <li>• Engineered for mainstream surveillance security systems</li> <li>• AllFrame™ technology improves ATA streaming to help reduce frame loss and improve overall video playback</li> <li>• Supports up to 64 single-stream cameras per drive</li> <li>• Supports Western Digital Device Analytics™ (WDDA)</li> <li>• Workload rating up to 180TB year, 3x the rating of desktop drive</li> </ul>		<ul style="list-style-type: none"> <li>• Higher Capacity Drives for More Demanding Smart Video Solutions</li> <li>• Enterprise Class Reliability</li> <li>• High Performance for Simultaneous Video Recording and Real-Time AI Analysis</li> <li>• Built for Advanced Smart Video Workloads</li> <li>• Innovative AllFrame™ Technology</li> <li>• Proactive Drive Health Insights with WDDA™</li> </ul>	



Western Digital.


# UNSTOPPABLE PURSUIT

For a Safer Future

Celebrating  
**10** Years of  
WD Purple®



# Since 2009

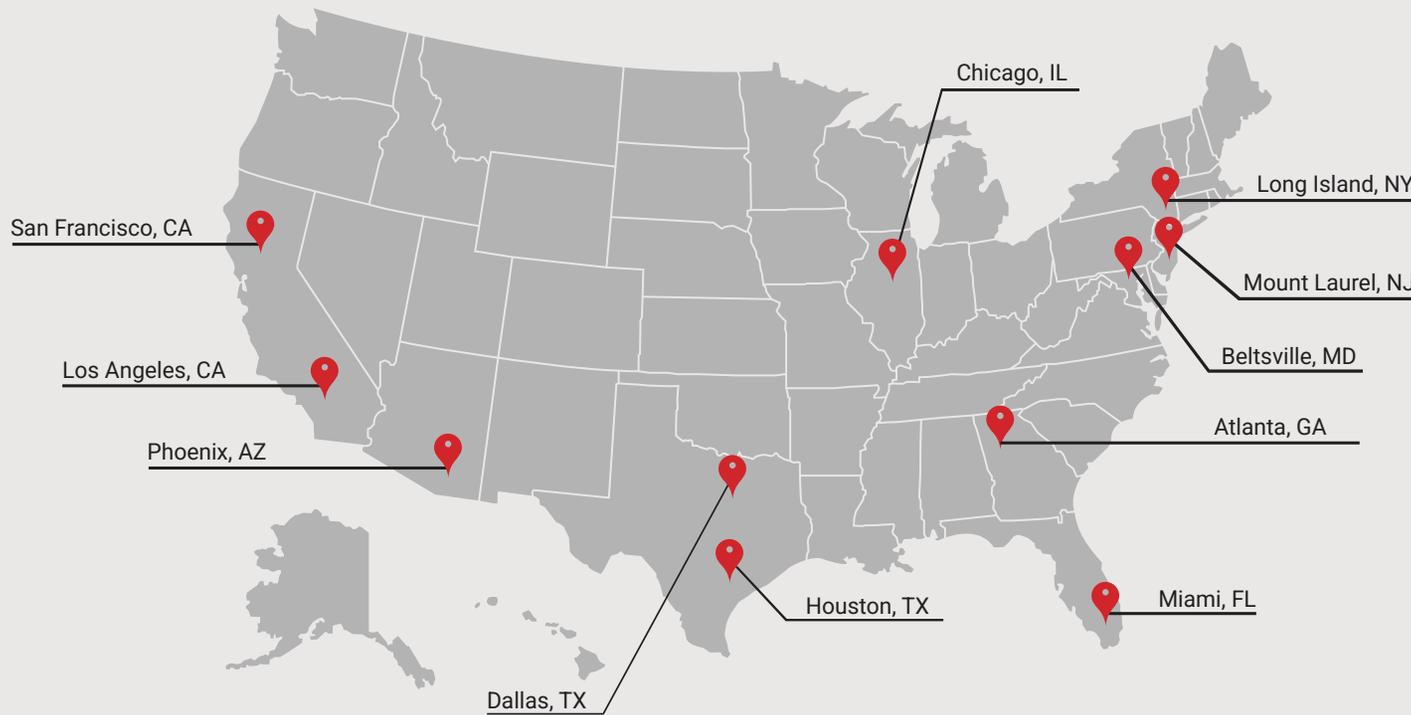

**Visit**  
LTSecurityinc.com

## West Region

### California - Los Angeles

17333 Freedom Way  
City of Industry, CA 91748  
Toll Free: 888-587-5871  
Tel: 626-435-2838  
Email: Contact.LosAngeles@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (PST): MON - FRI  
*En LTS California hablamos español*

### California - San Francisco

37370 Cedar Blvd., Suite D  
Newark, CA 94560  
Toll Free: 888-216-2812  
Tel: 510-201-9868  
Email: Support.SanFrancisco@LTSecurityinc.com  
Sales Office: 9am - 6pm (PST): MON - FRI  
*\*Effective December 2025*

### Arizona - Phoenix

2850 S. 36th St., Suite A-7  
Phoenix, AZ 85034  
Toll Free: 877-284-2890  
Tel: 602-903-2220  
Email: Support.AZ@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (MST): MON - FRI  
*En LTS Arizona hablamos español*

## Central Region

### Texas - Houston

8634 Westpark Dr.  
Houston, TX 77063  
Tel: 713-587-1800  
Email: Support.Houston@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (CST): MON - FRI  
*En LTS Houston hablamos español*

### Texas - Dallas

1100 Valwood Pkwy., Suite 112  
Carrollton, TX 75006  
Tel: 469-289-5780  
Email: Support.Dallas@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (CST): MON - FRI  
*En LTS Dallas hablamos español*

### Illinois - Chicago

1951 Landmeier Rd.  
Eik Grove Village, IL 60007  
Tel: 630-348-8088  
Email: Support.Chicago@LTSecurityinc.com  
Sales Office: 9am - 6pm (CST): MON - FRI  
*En LTS Illinois hablamos español*

## East Region

### New Jersey - Mount Laurel

109 West Park Dr., Suite B & C  
Mount Laurel, NJ 08054  
Toll Free: 855-835-8889  
Tel: 856-780-9888  
Email: Support.NewJersey@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (EST): MON - FRI

### New York - Long Island

454 W John St  
Hicksville, NY 11801  
Toll Free: 888-517-3102  
Tel: 646-555-3888  
Email: Support.NewYork@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (EST): MON - FRI  
*After-hour Pickup Available*

### Maryland - Beltsville

7001 Muirkirk Meadows Dr., Suite A  
Beltsville, MD 20705  
Tel: 240-493-8988  
Email: Support.Maryland@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (EST): MON - FRI  
*En LTS Maryland hablamos español*

### Georgia - Atlanta

5933 Peachtree Industrial Blvd., Suite B  
Norcross, GA 30092  
Tel: 678-710-3788  
Email: Support.GA@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (EST): MON - FRI

### Florida - Miami

1609 NW 84th Ave  
Doral, FL 33126  
Tel: 786-693-1813  
Fax: 786-631-3639  
Email: Support.Florida@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (EST): MON - FRI  
*En LTS Florida hablamos español*